Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 27, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-21-91 (DATE) found no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-21-91 (DATE) placed a cast iron monument on ℄ of N-S road and fence line East. on straight line between NW corner & SW corner of Sec. 27.

SKETCH OF REFERENCE TIES

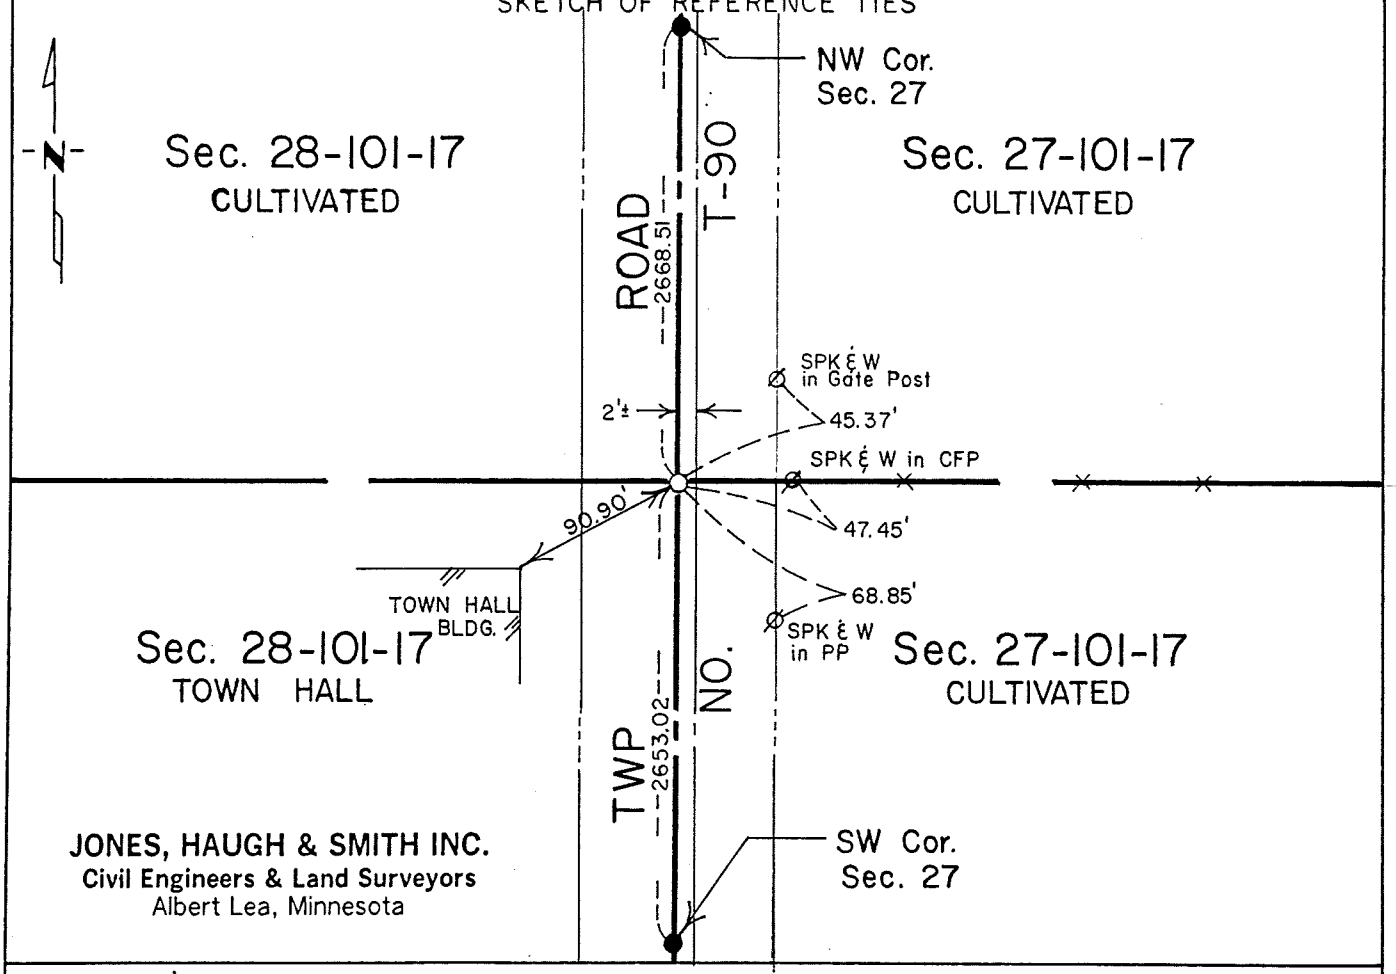

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-8-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 27-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline of north-south road in line with fence for Bridge Survey #2551. Dug a 5'x12'x3' deep hole and found no evidence of public land survey corner or a perpetuation thereof. Placed cast iron monument on straight line between section corners in line with fence east 0.5 feet below road surface.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.