Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-22-1990 (DATE) found a POINTED FIELD STONE 4.0' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-22-1990 (DATE) placed a 5/8" Ø IRON STAKE (CAPPED RLS 13807) AT ROAD SURFACE OVER STONE FOUND.

SKETCH OF REFERENCE TIES

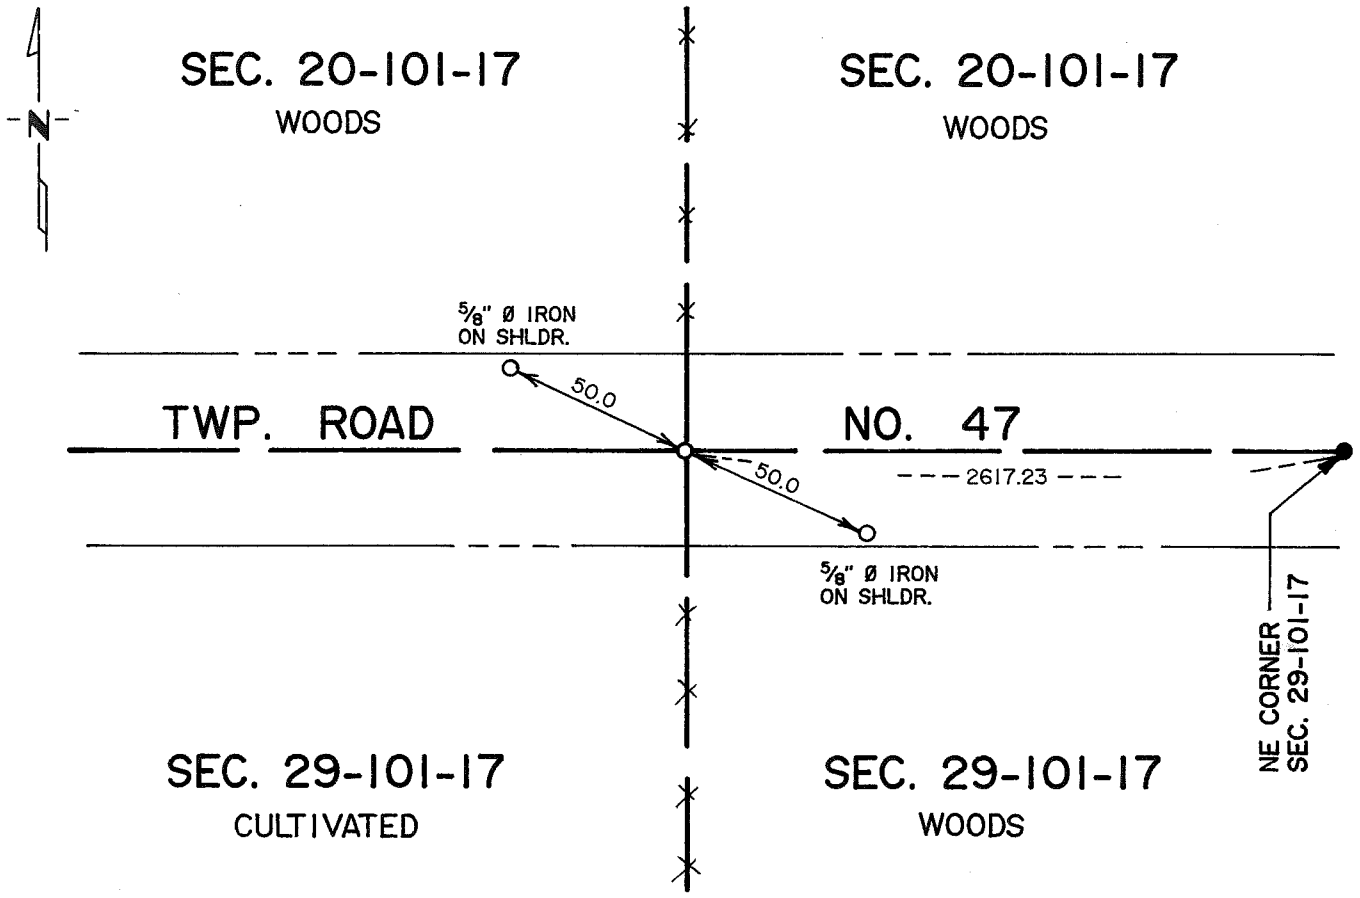

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-22-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

14" Black Oak	N 88° E	19 links (12.54 feet)
18" Black Oak	S 67° W	30 links (19.8 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show a government post in place and a chaining distance of 3958.0 to NE corner versus 3934.0 feet to the northwest corner.

1951 Mower County Book "A" shows an iron rod inplace and the following ties were taken:

41.0' N to end FP
84.0' S to spike in 12" Elm tree
67.5' SE to spike in 10" Elm tree
47.0' NE to spike in 24" Cottonwood tree

1990 Jones, Haugh & Smith crew along with the County backhoe dug at the intersection of fence lines north and south and the centerline of an east-west road, and found a pointed field stone 4.0 feet deep. Continued digging and found no further evidence of the public land survey corner. Placed a 5/8" iron (RLS 13807) over the stone and measured 2617.23 feet east to the northeast corner Section 29 versus 2612.28 feet (1879 Clausen) and measured 2594.63 feet west to the northwest corner of Section 29 versus 2596.44 feet (1879 Clausen).

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.