Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-22-1990 (DATE) found a ½"Ø X 12" IRON STAKE 0.5' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-22-1990 (DATE) placed a 5/8"Ø IRON STAKE AT ROAD SURFACE OVER MONUMENT FOUND.

SKETCH OF REFERENCE TIES

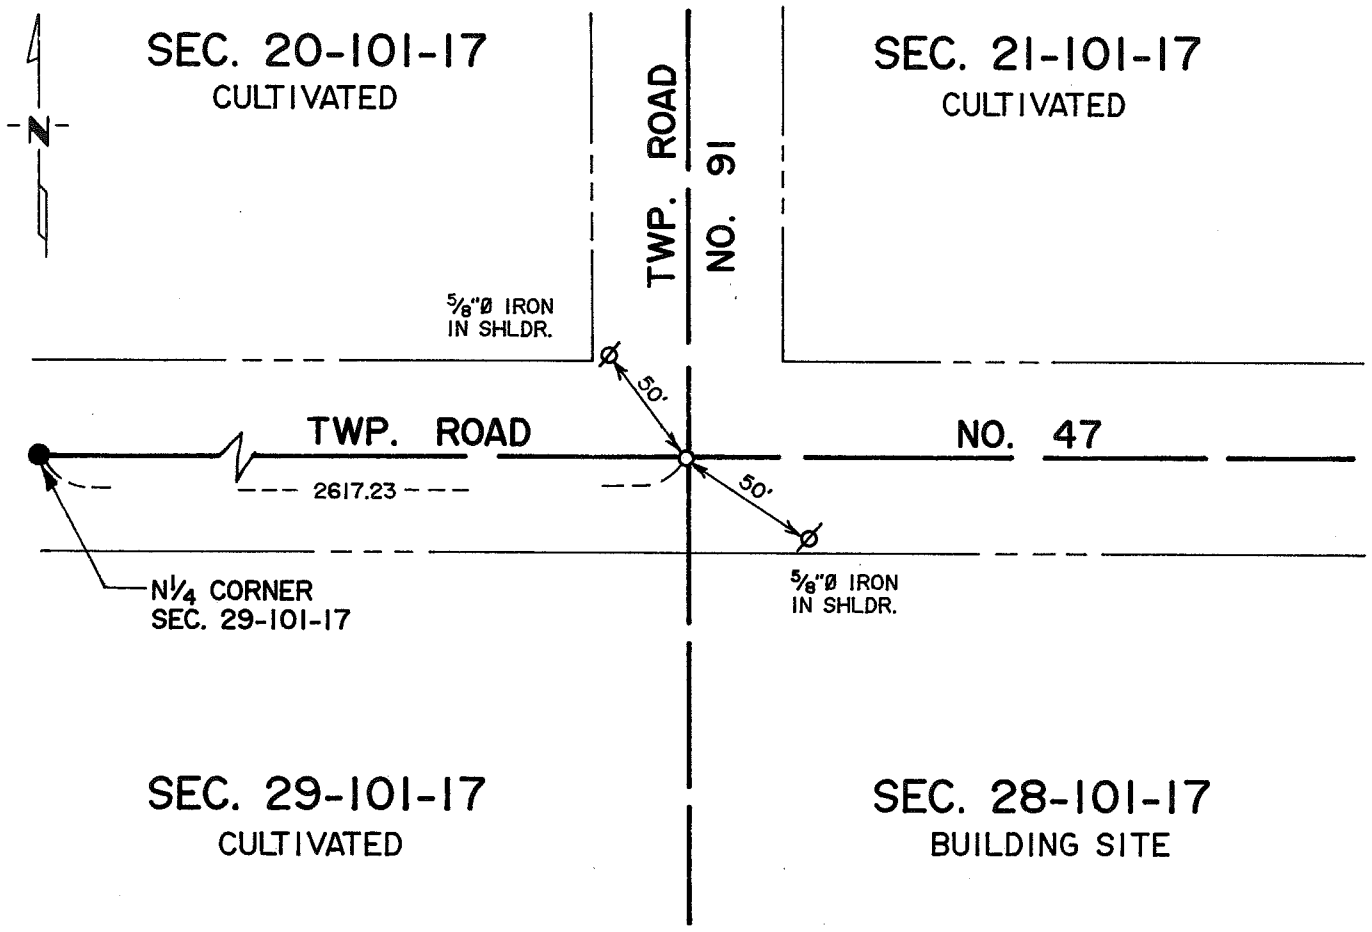

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

11" Aspen	N 55 1/2° W	39 links (23.76 feet)
12" Black Oak	N 62° E	32 links (21.12 feet)
12" Black Oak	S 70 1/2° E	9 links (5.94 feet)
8" Aspen	S 36° W	52 links (34.32 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show government post inplace.

1951 Mower County Book "A" shows corner found and the following ties were taken:
37.7' South to spike in 14" Elm
43.9' NE to tele. pole
41.8' NW to spike in 12" Elm
28.5' SE to tele. pole

1990 Jones, Haugh & Smith crew dug with the County backhoe and found a 1/2"x12" iron 0.5' at the centerlines of roads north and east-west. Continued digging and found no further evidence of original public land survey corner. Set (capped RLS 13807) 5/8" diameter iron stake over found iron and measured 2617.23 feet west to the north 1/4 corner of Section 29 versus 2612.28 (C. 1879).

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.