Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 29, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/22/1990 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

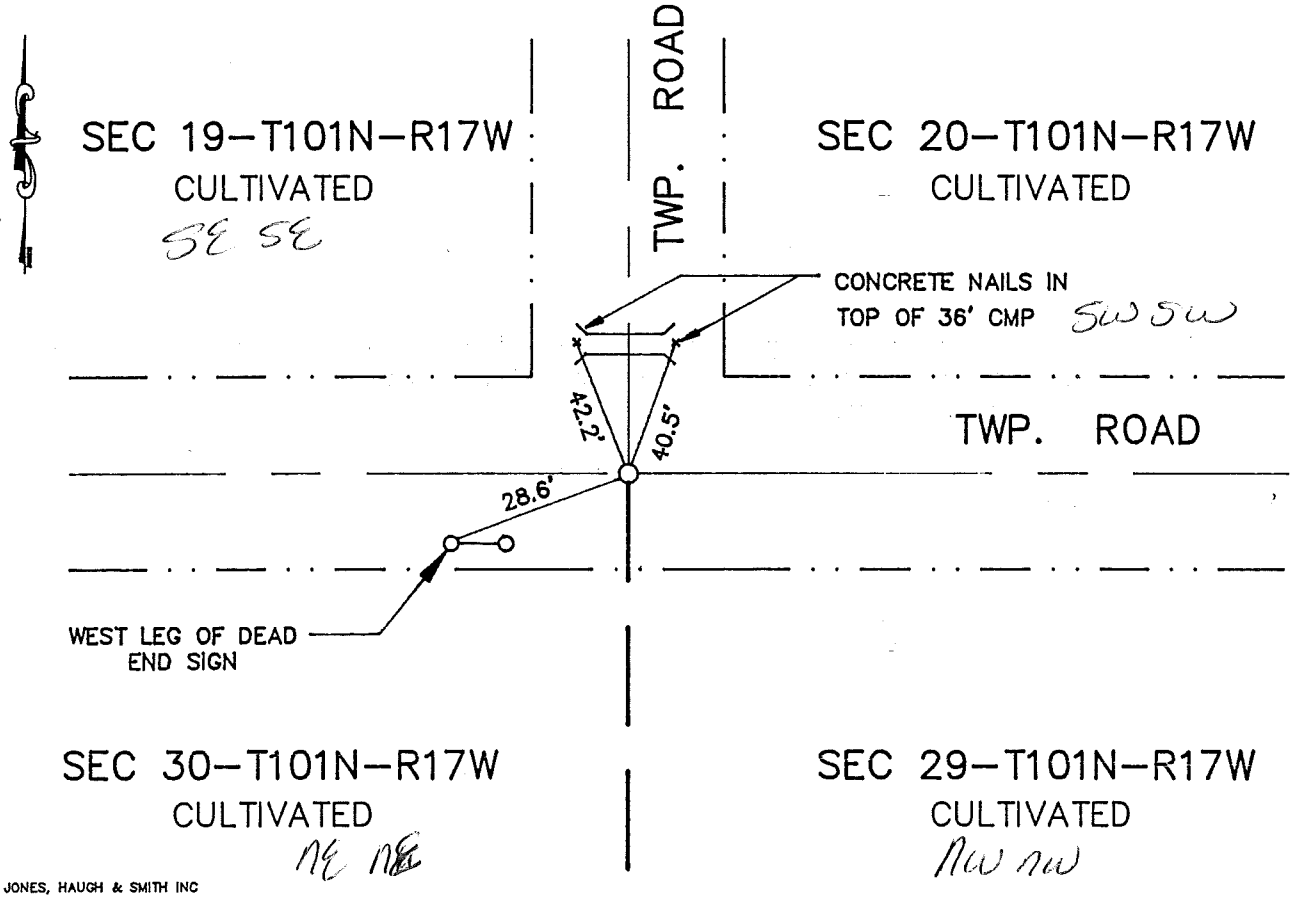

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 446968

Book 92 Misc Page 138

M.H.D. FORM NO. 2105

BOOK 92 PAGE 138

NW Cor SEC 29-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, excavated and found a cast iron monument at CL CL intersection of twp. roads. Found no further evidence of PLS corner. Therefore we accepted cast iron monument as best evidence of the original PLS corner and took ties.

1996 Jones Haugh and Smith found a cast iron monument in accordance with 1991 record.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER p.42 "C"

NORTHEAST Corner of Section 30, Township 101 N, Range 17 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-28-89 found STAKE HOLE STAIN

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-28-89 placed CTY. C.I.M. OVER A 3/4 X 18 PIPE IN STAKE HOLE

SKETCH OF REFERENCE TIES

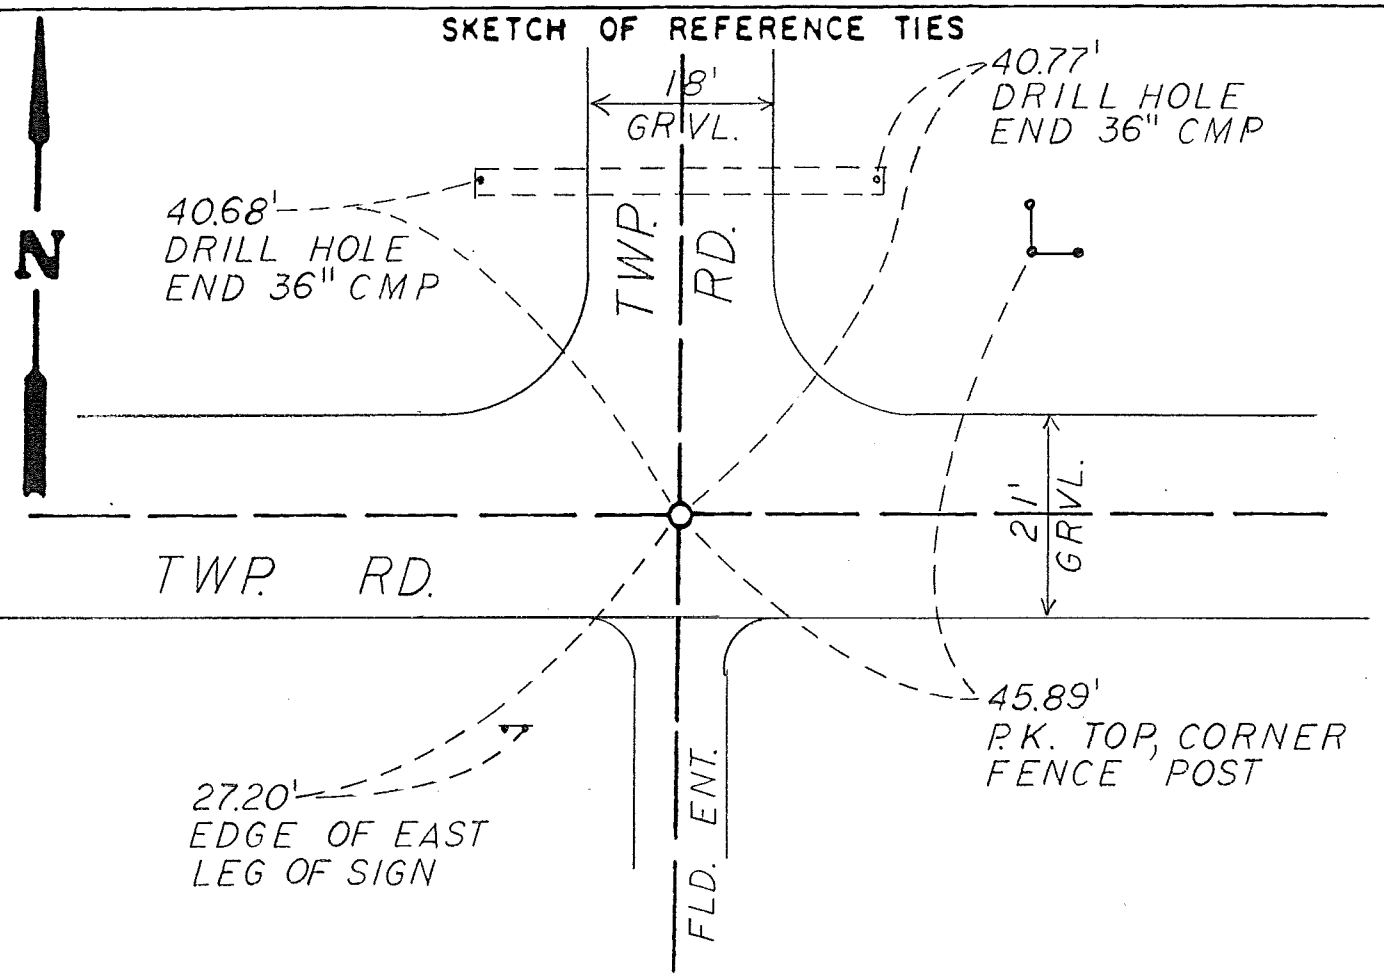

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 30, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

July, 1854	Charles Phipps and Edward Fitzpatrick, Deputy Surveyors, drove a charred stake, raised mound with trench as per instructions and planted a Locust Seed, NW, SW, NE and SE, during the original Public Land Survey.
1951	Mower County Engineer's Tie Book shows a 1/2" Iron Rod inplace with ties.
1985	Mower County Engineer's Tie Book shows ties to the Corner, being 3 feet south and 5 feet East of Centerline-Centerline of the Township Roads. No Monument was shown.
Sept. 28, 1989	Ronald J. Olson, RLS 11009, searched the area with a magnetic locator and excavated with a backhoe from 2 feet West to 6 feet East of the road centerline and from 1 foot North to 5 feet South from the centerline by 2.5 feet deep and found a 2 inch diameter by 1 foot high stake hole stain. The excavation was followed down to the pointed bottom of the stain. A 1/2 inch by 14 inch twisted steel rod under a 3/4 inch by 12 inch rebar was found 4 feet southeast of the stake hole.
	An analysis of the record data shows that the stake hole stain is evidence of the location of the original stake set in 1854. This location is accepted as the position of the original Public Land Survey Corner.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.