Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-26-1990 (DATE) found a POINTED FIELD STONE IN NEST OF SMALL STONES.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-26-1990 (DATE) placed a CAST IRON MONUMENT OVER FIELD STONE FOUND.

SKETCH OF REFERENCE TIES

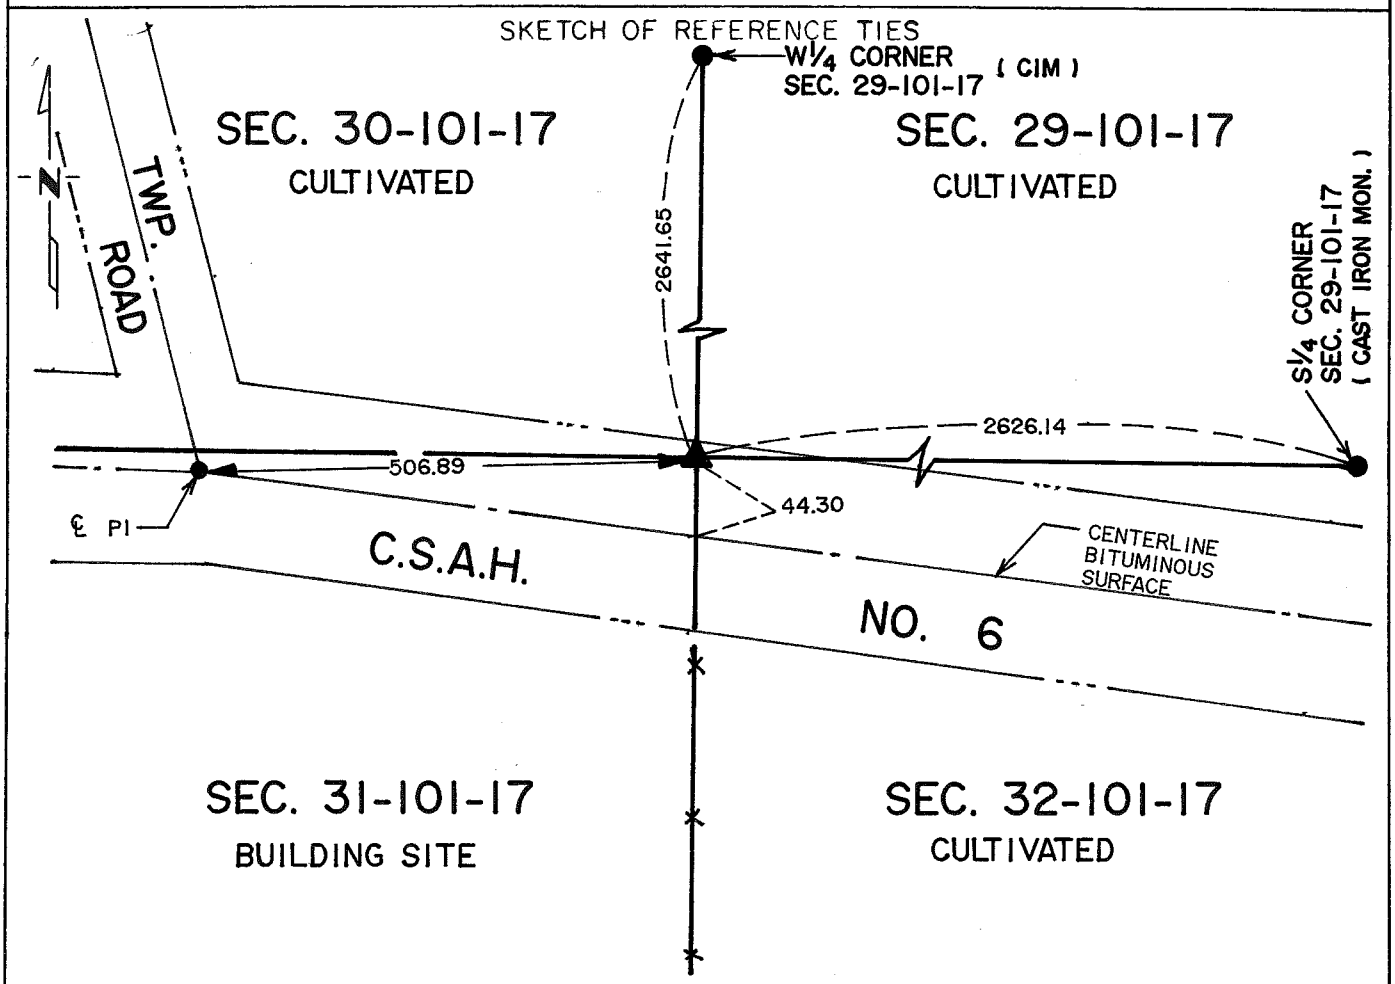

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-22-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

10" Black Oak	N 25° W	185 links (122.10 feet)
12" Burr Oak	N 88° E	92 links (60.72 feet)
10" Burr Oak	S 39° E	473 links (312.18 feet)
10" Black Oak	S 15° W	195 links (128.70 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show a stone in place and chaining distances are shown.

No date Mower County Book "A" shows section corner Sta 212+59 of Job 30-C found and the following ties were taken:
33.0' N of centerline Prop. Road
79.0' W to fence post
80.0' SW to tele. pole
11.0' SE to fence post

1928 County grading plan shows corner 33.0 feet north of centerline county road.

1951 New County Grading Plan shows the road was realigned and the centerline was relocated to 44.3' south of section corner.

1990 Jones, Haugh & Smith crew found a pointed field stone in nest of stones 44.3 feet north of the centerline of east-west CSAH 6 in line with fence line south and measured a distance of 2626.14 feet east to the south 1/4 corner of Section 29 versus 2626.80 feet (government); and measured a distance of 2641.65 feet north to west 1/4 corner of Section 29 versus 2640 feet (government) versus a distance of 2626.14 (C. 1879).

The monument found fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.