Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-09-1990 (DATE) placed a 5/8" Ø IRON STAKE CAPPED RLS 13807

SKETCH OF REFERENCE TIES

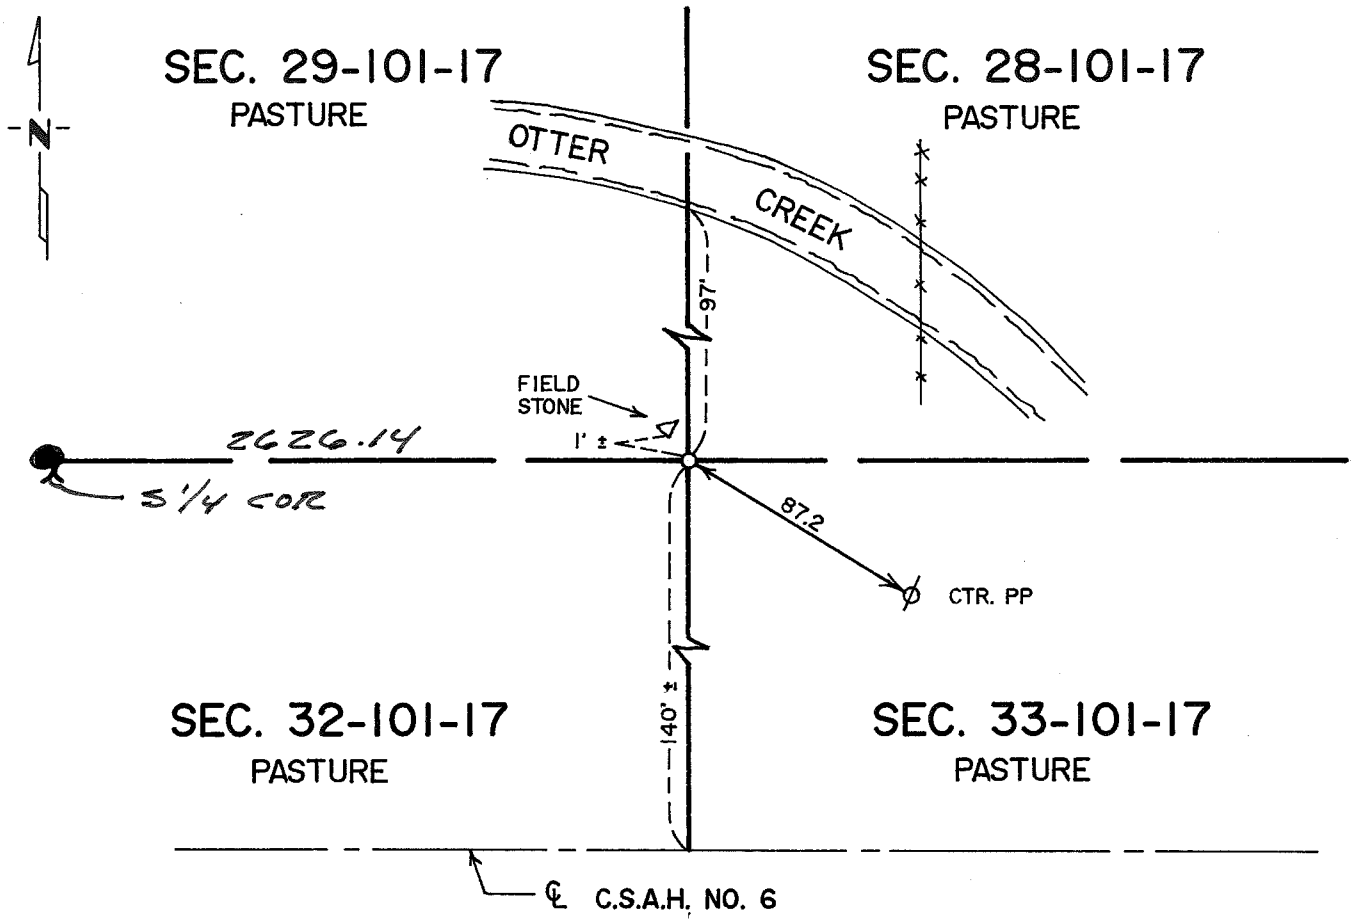

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-22-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

8" Elm	N 43° W	90 links (59.40 feet)
6" Elm	N 41 1/2° E	135 links (89.10 feet)
11" Burr Oak	S 32° E	632 links (417.12 feet)
5" Burr Oak	S 8° W	335 links (221.10 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Mower County "A" Book shows a government post in place. Chaining distances are also given.

1990 Jones, Haugh & Smith crew made a thorough search of an area by extending a line from the S 1/4 corner and southwest corner of Section 29 east a distance of 2626 feet from the S 1/4 corner and extending the fence line to the north and south. Found no evidence of the public land survey corner. Placed a 5/8" diameter iron RLS 13807 at this position and measured a distance of 2626.14 feet west to the S 1/4 corner versus 2626.14 (1879 Clausen).

The monument fits occupation lines within the section and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.