Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1996 (DATE) found a BENT 2.5' IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

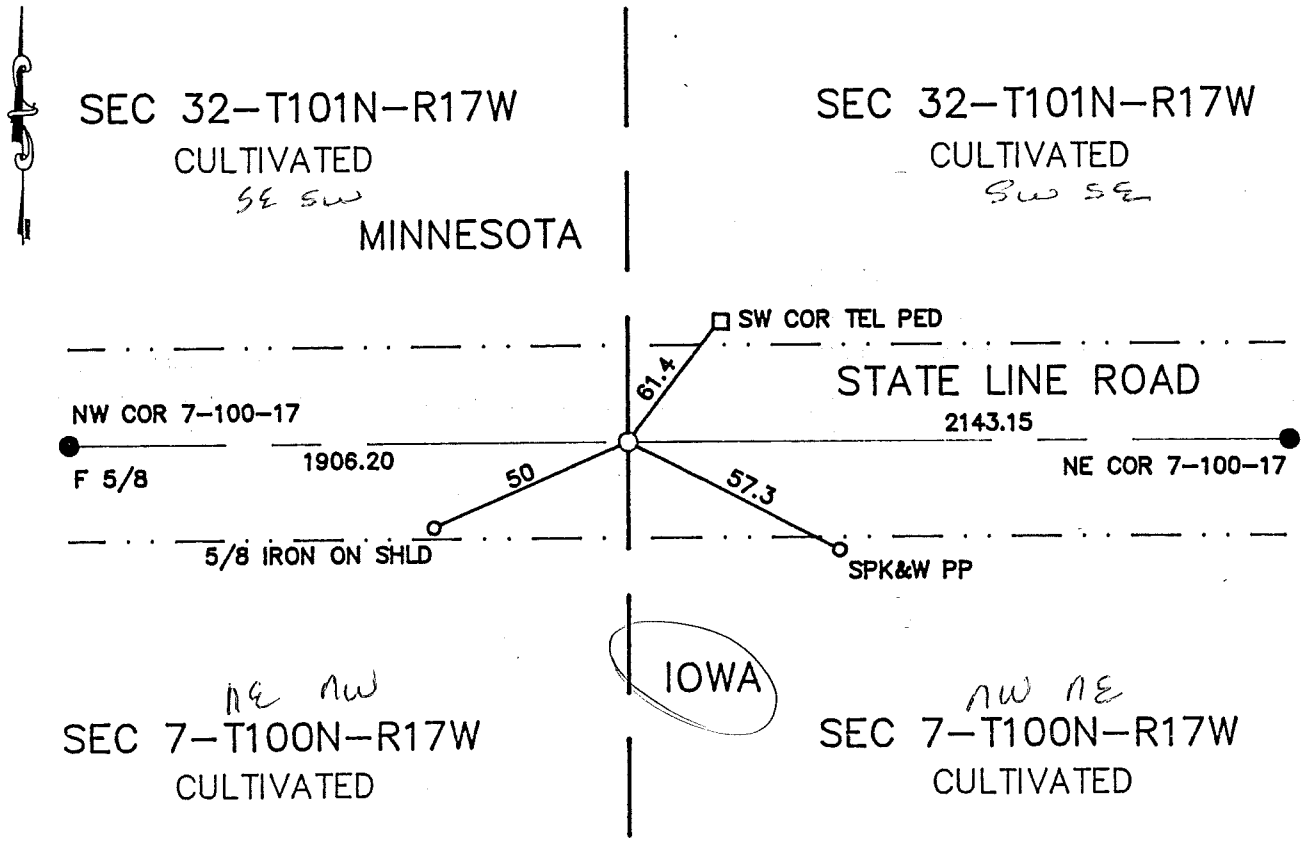

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447102

M.H.D. FORM NO. 2105 BOOK 92 PAGE 174 Book 92 Misc Page 174

S 1/4 Cor SEC 32-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1932 Iowa records show this corner to be 1906.2' east of the NW corner of section 7-100-17 and 2142.4' west of the NE corner of the same section.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, using Iowa records, dug by hand at this location and uncovered a bent 2.5' iron. The bent iron was removed and replaced by cast iron monument. The corner is 1906.2' east of the NW corner of section 7-100-17, and 2143.15' vs. 2142.3' west of the NE cor 7-100-17.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.