Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a 1/2"ø iron capped (RJO) over a cast iron monument 1.5' deep continued digging and found a large stone with wood post on South side.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a lower section of harrison monument over stone and set cast iron monument over stone on road surface

SKETCH OF REFERENCE TIES

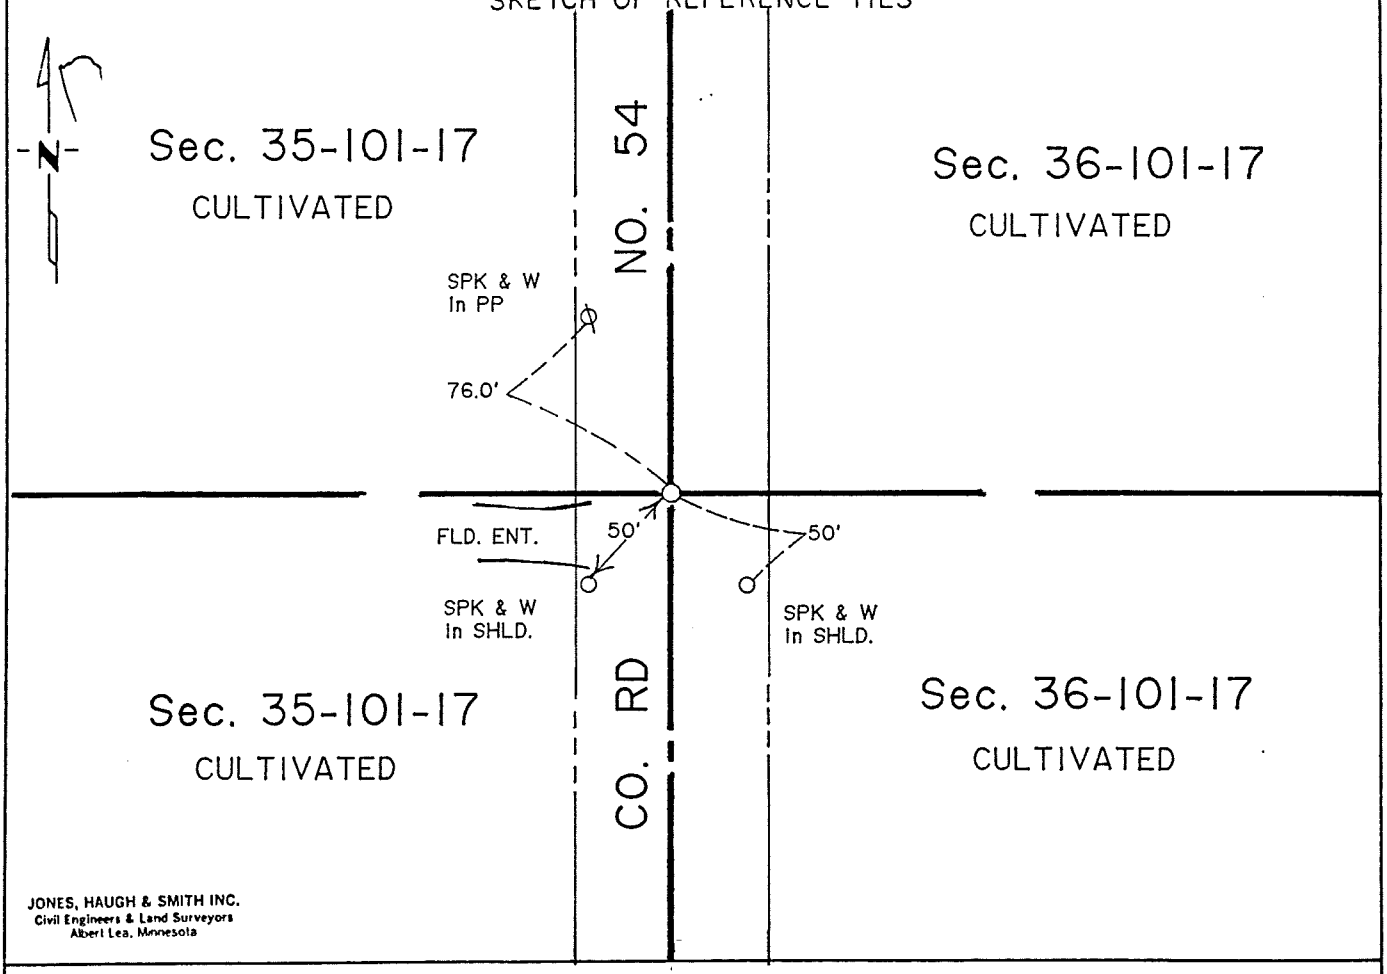

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1879 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline N-S road in line with field division west for bituminous overlay project SAP 50-619-14. Uncovered a 1/2" diameter iron capped RJO 0.5' deep. Continued digging and found a large square stone with a wood post on the south side 4.5' below the surface. Placed lower section of the harrison cast iron monument over stone and set a cast iron monument on the road surface over the stone.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.