Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 25, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a cast iron monument 1.0' deep over a 6"ø concrete monument in a clay tile with a 5/8"Ø iron cast in center and a old wood stake on North side.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a cast iron monument on surface over concrete monument found.

SKETCH OF REFERENCE TIES

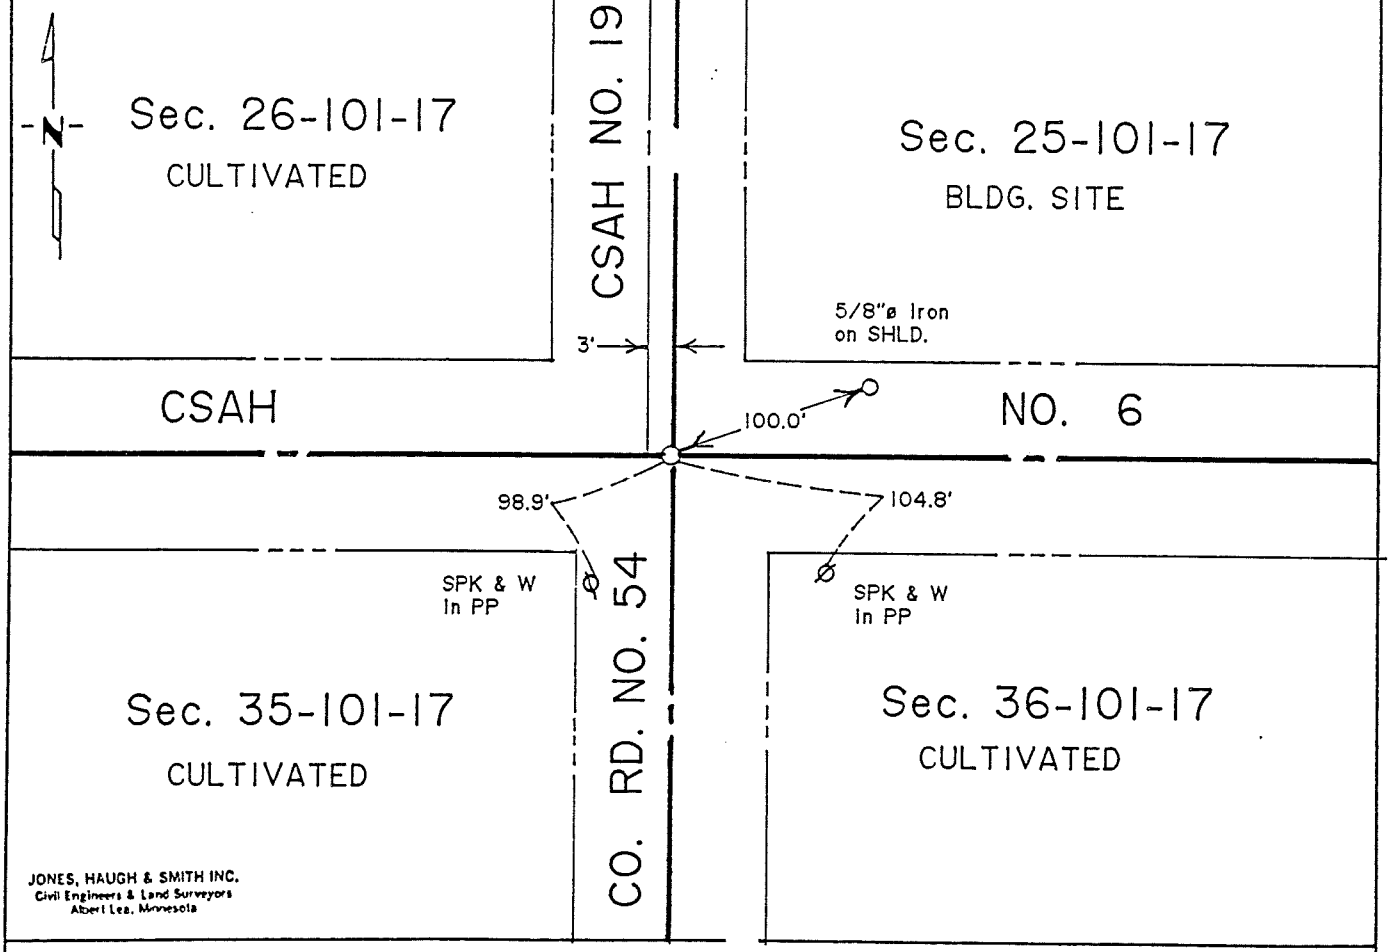

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 25-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1888 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1930 Book "A" in the Mower County Engineers Office show a government post inplace. The following ties were recorded:
50' NW to steel rod
50' SW to steel rod
50' NE to steel rod
50' SE to steel rod

Book "A" shows a concrete monument inplace. The following ties were recorded:
106.6' NW to PP
108.2' SW to PP
106.4' SE to PP
107.4' NE to 12" Pine

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-619-14. Excavated a 4' x 8' x 4' deep hole and uncovered a cast iron monument 1.0' deep. Continued digging and found a 6" diameter concrete monument in a clay tile with a 5/8" diameter iron cast in the center 4.0' below the road surface in virgin soil with an old wood stake on the north side of the monument. Left the monument as found and placed a cast iron monument on the road surface over the concrete monument found.

The monument placed fits occupation lines is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.