Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a harrison monument 0.5' deep over a 8"x16" long pointed field stone over a nest of small stones.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a 5/8"ø iron on East side of stone, set cast iron monument over stone at surface.

SKETCH OF REFERENCE TIES

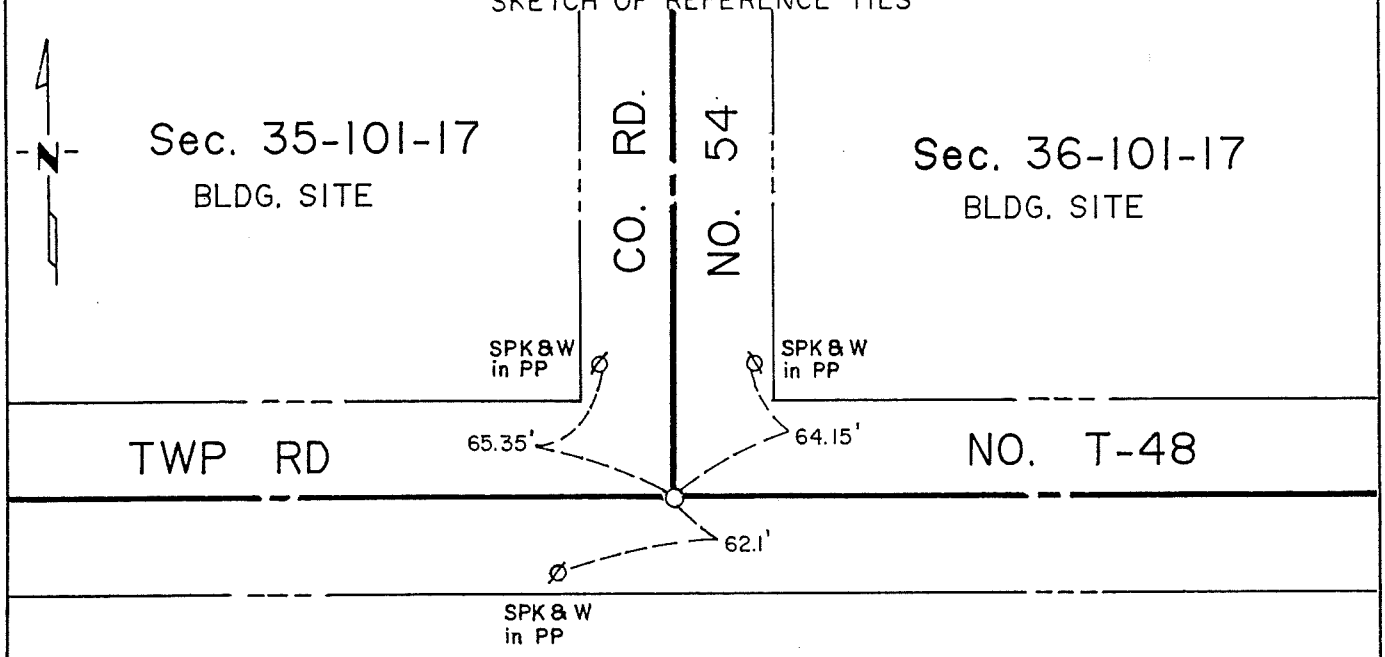

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 36-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1879 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

Book "A" in the Mower County Engineers Office shows corner inplace and the following ties were taken:

50.0' NW to steel rod
50.0' SW to steel rod
50.0' NE to steel rod
50.0' SE to steel rod

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of N-E-W roads for bituminous overlay project SAP 50-619-14. Dug a 6' x 8' x 3' deep hole and uncovered a harrison cast iron monument 0.5' deep. Continued digging and uncovered a 8" x 16" long pointed field stone over a nest of 4 small stones 3' below the surface in virgin soil. Placed a 5/8" iron on east side of the stone and a cast iron monument on the road surface over the stone.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.