Index No. _____ P74 "D"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-24-92 (DATE) found a HARRISION CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-24-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

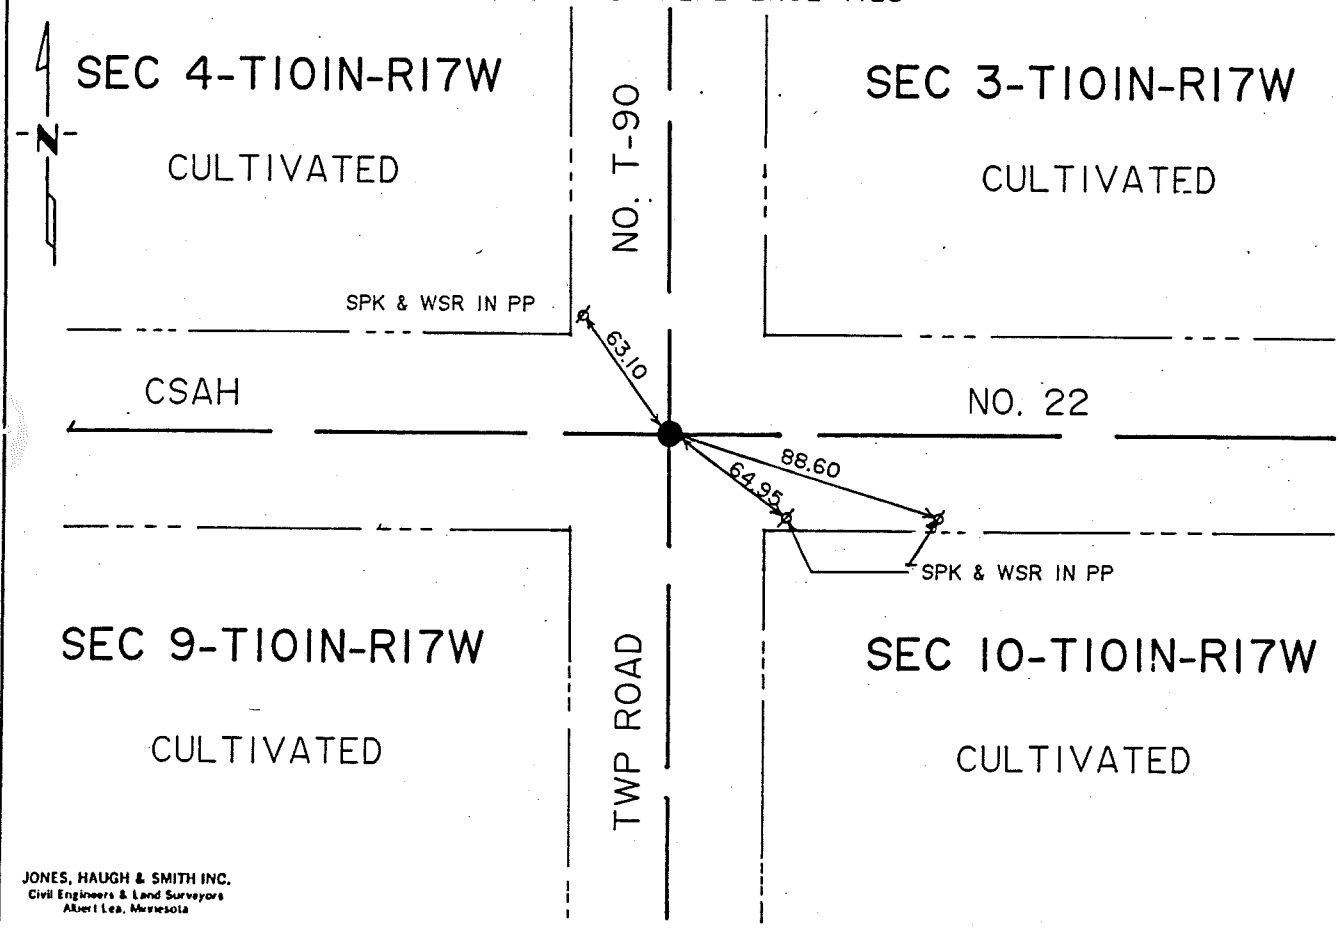

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-15-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 3-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

Recorded in Book A in the Office of Mower County Highway Department shows a stone was inplace at this location and ties were taken as follows:

68.0' NE to corner School House
42.4' SE to corner fence post
36.0' SW to corner fence post
39.5' NW to corner fence post

1980 Book A in the office of Mower County Highway Department indicates a cast iron monument was inplace at Sta 214+56.5 and ties were taken as follows:

41.5' SE to PP
46.0' SW to tele pole

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe and uncovered a harrison cast iron monument over wood hub. Continued digging and found no evidence of stone monument or original public land survey corner. In 1980 grading a core cut was made at this location. Accepted cast iron monument as best evidence and reset at same location.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a NEST OF SMALL STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

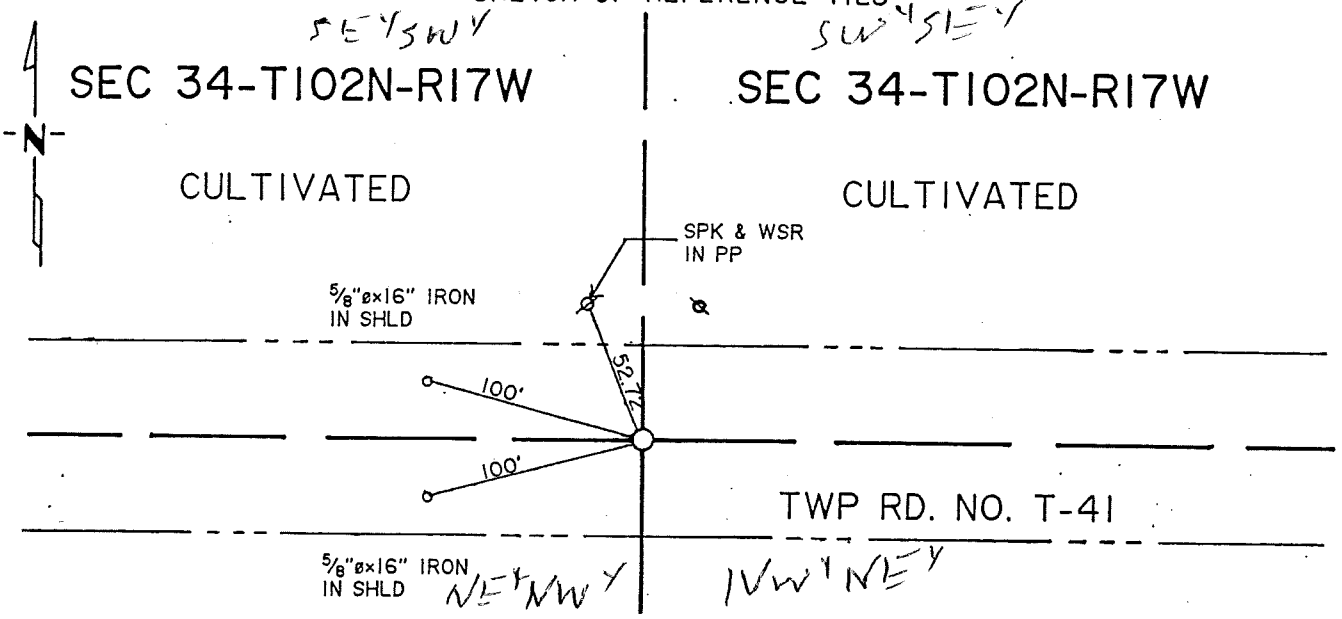

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807.

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 19 93

COUNTY RECORDER Arnold Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421532

Bk 79 Misc Pg. 576

M.H.D. FORM NO. 2105 BOOK 79 PAGE 576

STATEMENT OF EVIDENCE

N 1/4 cor Sec 3-101-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner and a distance of 39.94 chains to the northwest and northeast corner of Section 3.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x4'x12' hole on the centerline of the east-west township road and in line with the north-south field division and also in center of the north-south power line. We found an old roadbed at a depth of 3.5 feet. We continued digging and uncovered a 6" length of barbed resting next to a nest of small stones six inches below said roadbed. Searched a 3 foot diameter area around nest of stones but did not find any evidence of the original public land survey corner. Therefore we accepted nest of stones as the best evidence of a perpetuation of the original public land survey corner and set a cast iron monument near road surface above next of stones found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 577

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 3, Township T10IN Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 10"x10"x18" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

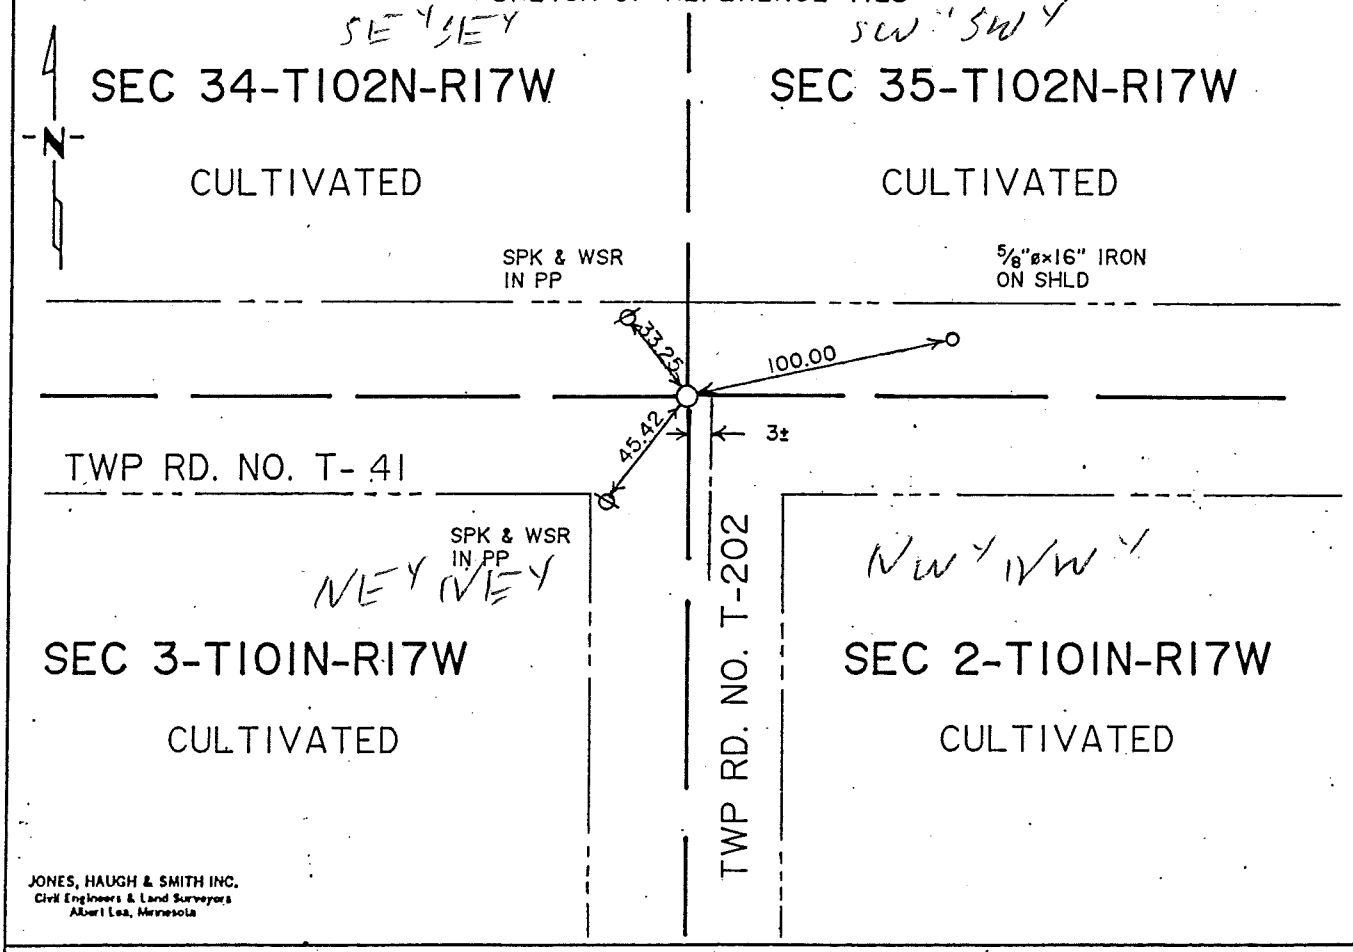

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 1993

COUNTY RECORDER Chandler Engen

By Marlene Martin, Deputy

DOCUMENT NO. 421533

Bk 79 Misc Pg. 578

M.H.D. FORM NO. 2105

BOOK 79 PAGE 578

STATEMENT OF EVIDENCE

NE cor Sec 3-101-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner and a distance of 39.94 chains east of the N 1/4 corner.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 4'x2'x12' hole on the centerline centerline of the east-west township road and north-south township road. We found a 10"x10"x18" pointed field stone resting in virgin soil at a depth of two feet. The stone found also was in centerline centerline of the intersection. Therefore we accepted the stone found as the perpetuation of the original public land survey corner and set cast iron monument near road surface and above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 579

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 5/8"ø x16" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

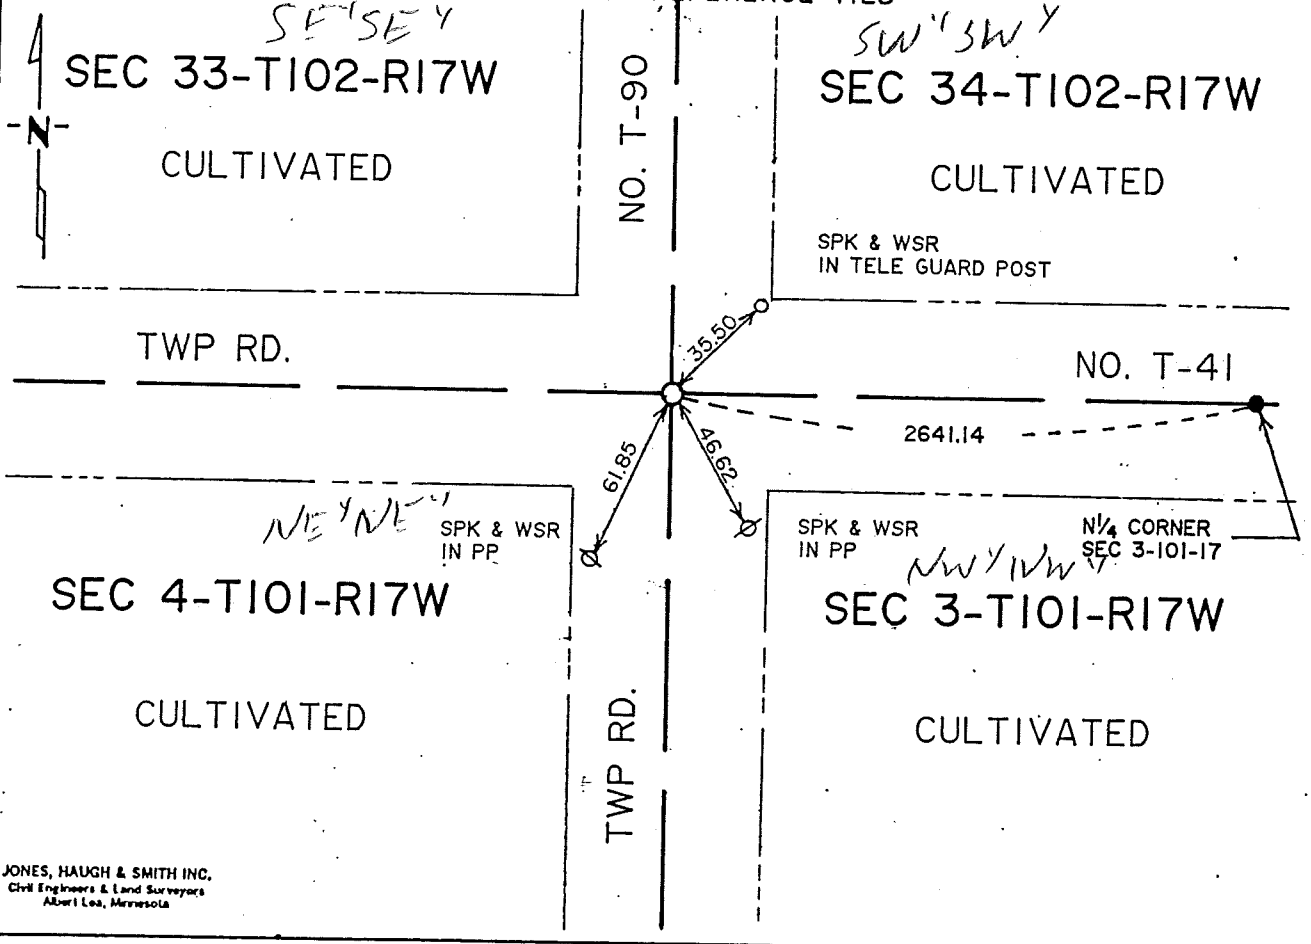

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-9-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 17 day of June A.D., 1993

COUNTY RECORDER Chandler Conger

By Marlene Martin, Deputy

DOCUMENT NO. 421534

Bk 79 Misc, Pg 580

M.H.D. FORM NO. 2105

BOOK 79 PAGE 580

STATEMENT OF EVIDENCE

NW cor Sec 3-101-17

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1890 Clausen, Mower County Surveyor, notes indicate a government post at this corner and a distance of 39.94 chains west of the N 1/4 corner.

1972 Jones, Haugh & Smith Inc crew set a 5/8" diameter x 24" iron at the corner at the centerline centerline intersection of existing township roads.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, RLS 13807, dug a 5'x5'x12' hole on the centerline centerline of township road and found a 5/8" diameter x 24" iron six inches deep. Continued digging to a depth of virgin soil and found no evidence of the original public land survey corner. Therefore we replaced 5/8" diameter x 24" iron as found and set a cast iron monument near road surface and above monument found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 581

Index No. P 74 "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 3, Township 101N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-24-92 (DATE) found a 3/4"ø x 12" PIPE OVER 6"x12" FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-24-92 (DATE) placed a CAPPED 13807 5/8"ø IRON ON SOUTH SIDE OF STONE SET CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

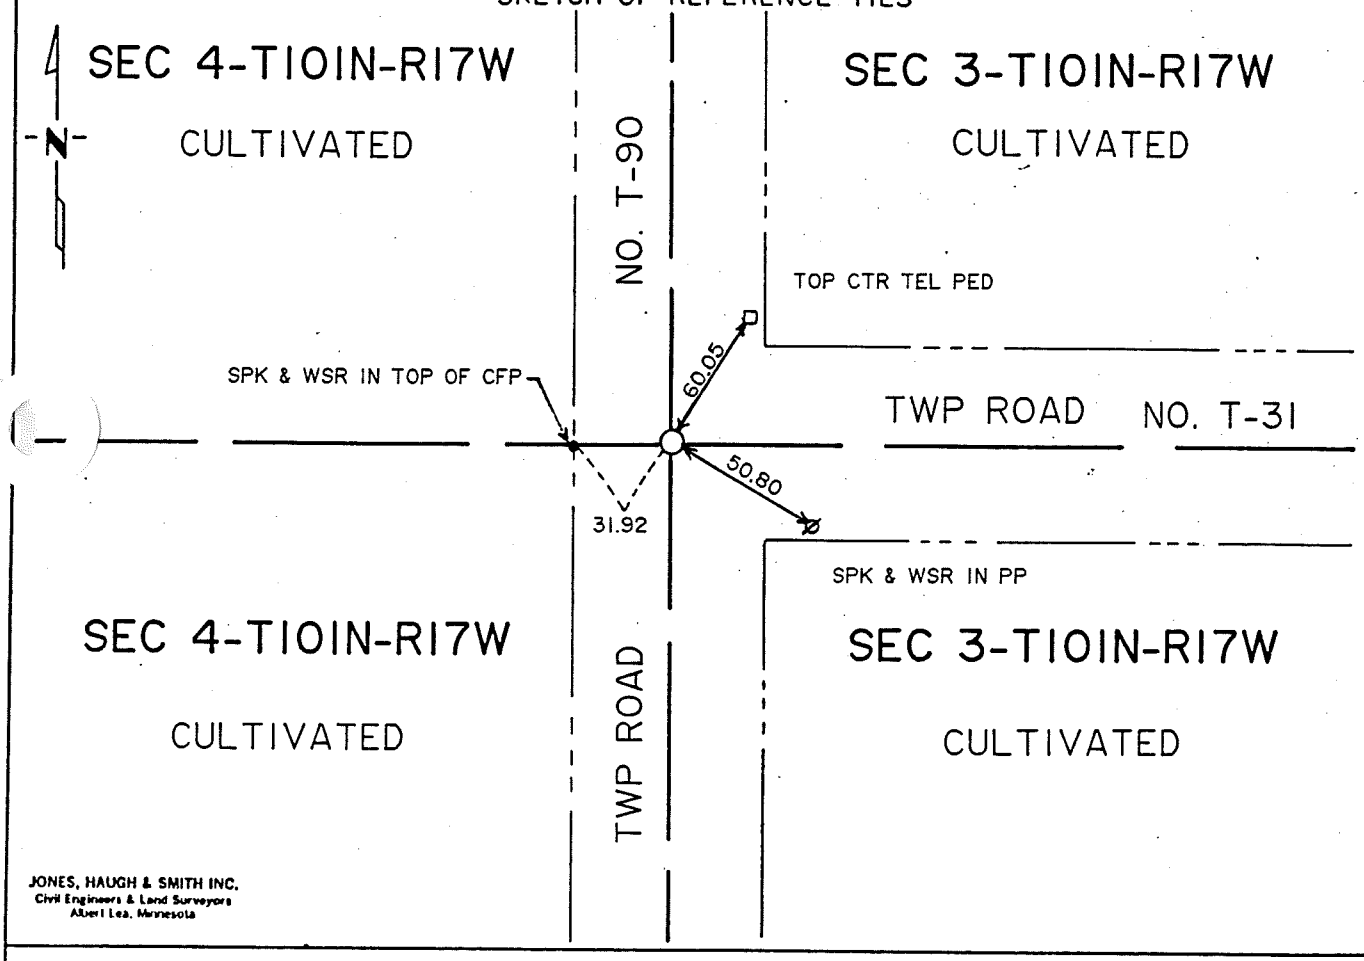

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 3-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with the county backhoe on centerline centerline of Township Road T-90 and T-31 and uncovered 3/4" diameter x 12" pipe over 6"x15" pointed field stone 2.5 feet deep in virgin soil. Set capped 13807 cast iron monument 5/8" diameter x 16" iron on south side of stone on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

" " "A" P130

Index No. K P74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a large bridge spk over a 1/2"ϕ iron cast in 8" dia. concrete monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-12-87 (DATE) placed a capped 5/8"ϕ iron over concrete monument

SKETCH OF REFERENCE TIES

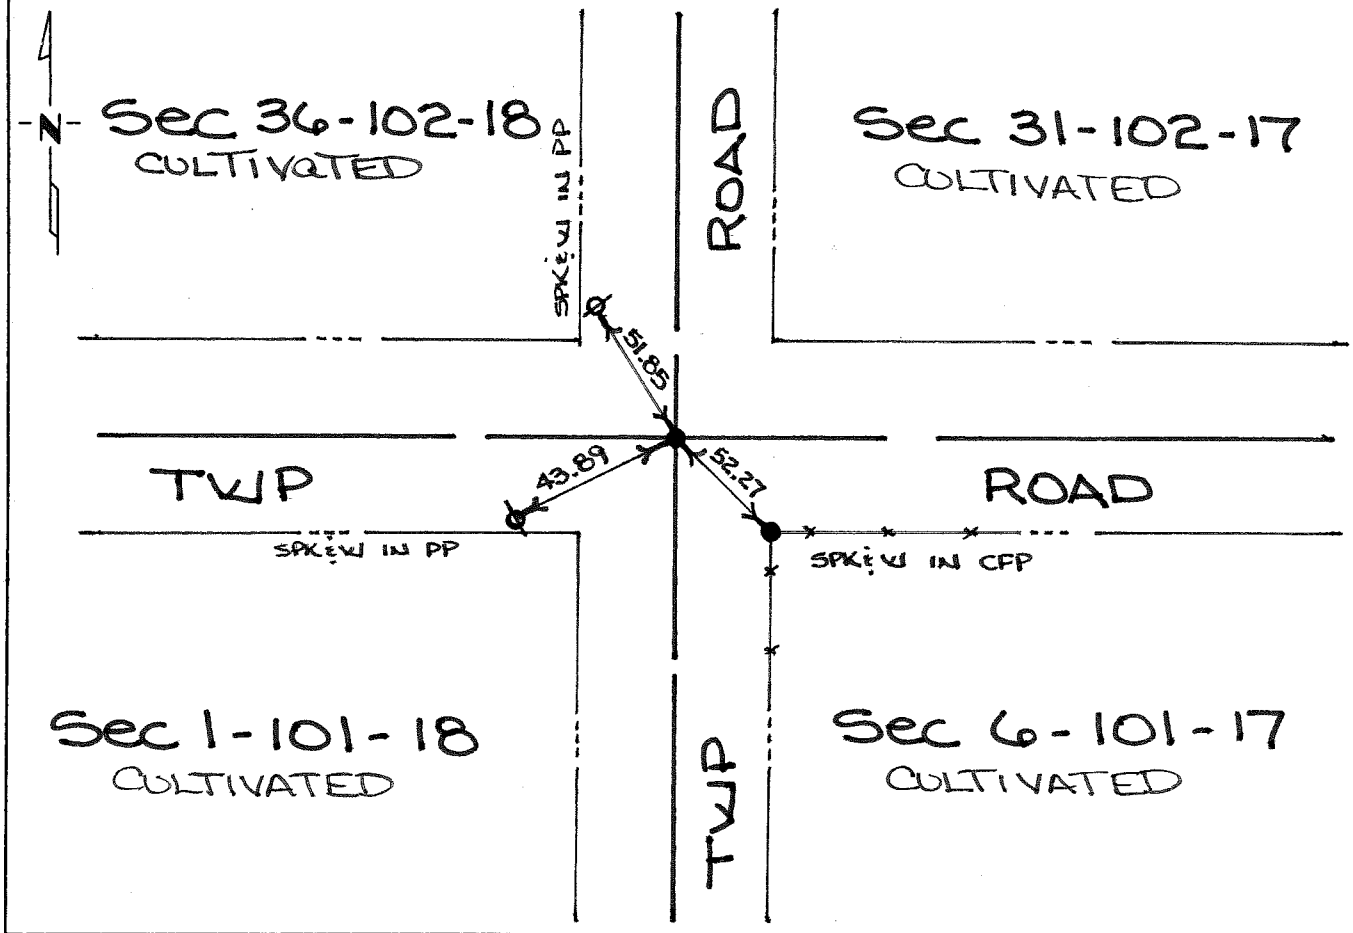

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] ☒ 11-25-87
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 6-101-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1854. Government notes show corner was marked with a wood post and charred stake.

November 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department

1888 records from Clausen shows a post was found during a private land survey.

No other record of this corner was to be found.

Nov. 1987 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline centerline north-south-east-west roads and uncovered a large bridge spike 0.5 feet deep. Continued digging and at a depth of 3 feet more or less uncovered a 1/2"ø iron cast in a 8" diameter concrete post. Placed a capped 5/8"ø iron over concrete post.

Concrete monument found is typical of corners found throughout Mower County set by G. Everett Carlson and A.C. White, both former Mower County Engineer and Registered Land Surveyor.

The monument found fits occupation and road centerlines within the section and is accepted as a perpetuation of the original public land survey corner.

Index No. "B," P. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a Cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

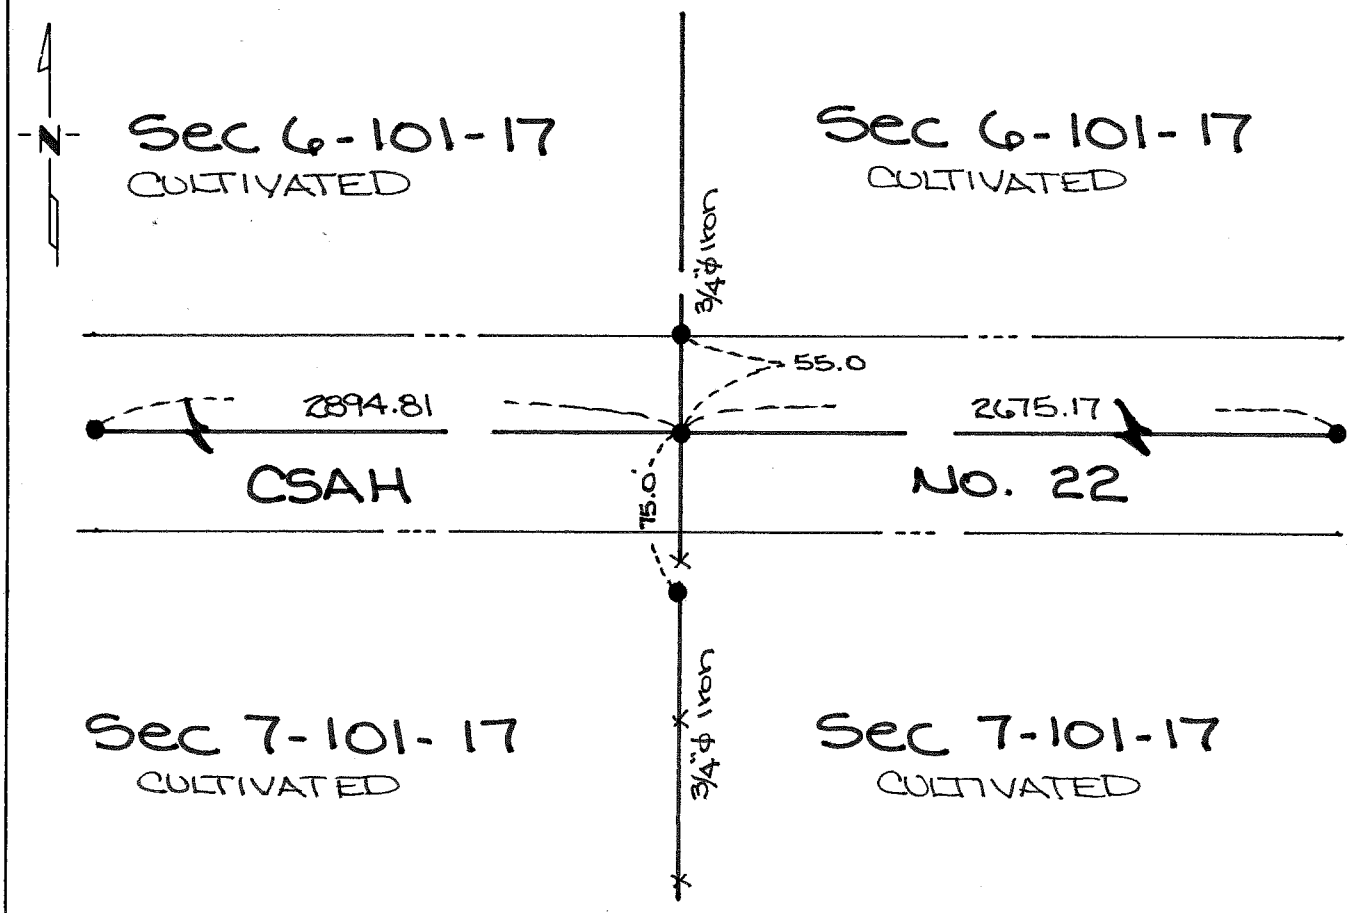

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-25-87

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S¼ corner Section 6-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show corner marked with a wood post and charred stake and made mound and trench.

Nov. 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department

The following information was obtained:

1936 Grading Plan show a pointed field stone was uncovered during grading project.

1978-1981 County personnel tied of the 1936 corners and regraded the road, a 3 foot more or less, core cut was made the entire length of the project, which would have destroyed the original public land survey corner or any perpetuation thereof.

June 1981 Mower County Highway set cast iron monument using ties and stationing obtained during grading project.

Nov. 1987 Jones, Haugh & Smith Inc crew using County ties uncovered cast iron monument set in 1981.

Monument fits the record, past surveys, occupation lines and road centerlines within the section and agrees with records from past grading projects and is accepted as the best evidence of a perpetuation of the original public land survey corner.

Index No. "J" p. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a 3" dia. charred wood post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a Cast iron monument stamped "1/4" Corner"

SKETCH OF REFERENCE TIES

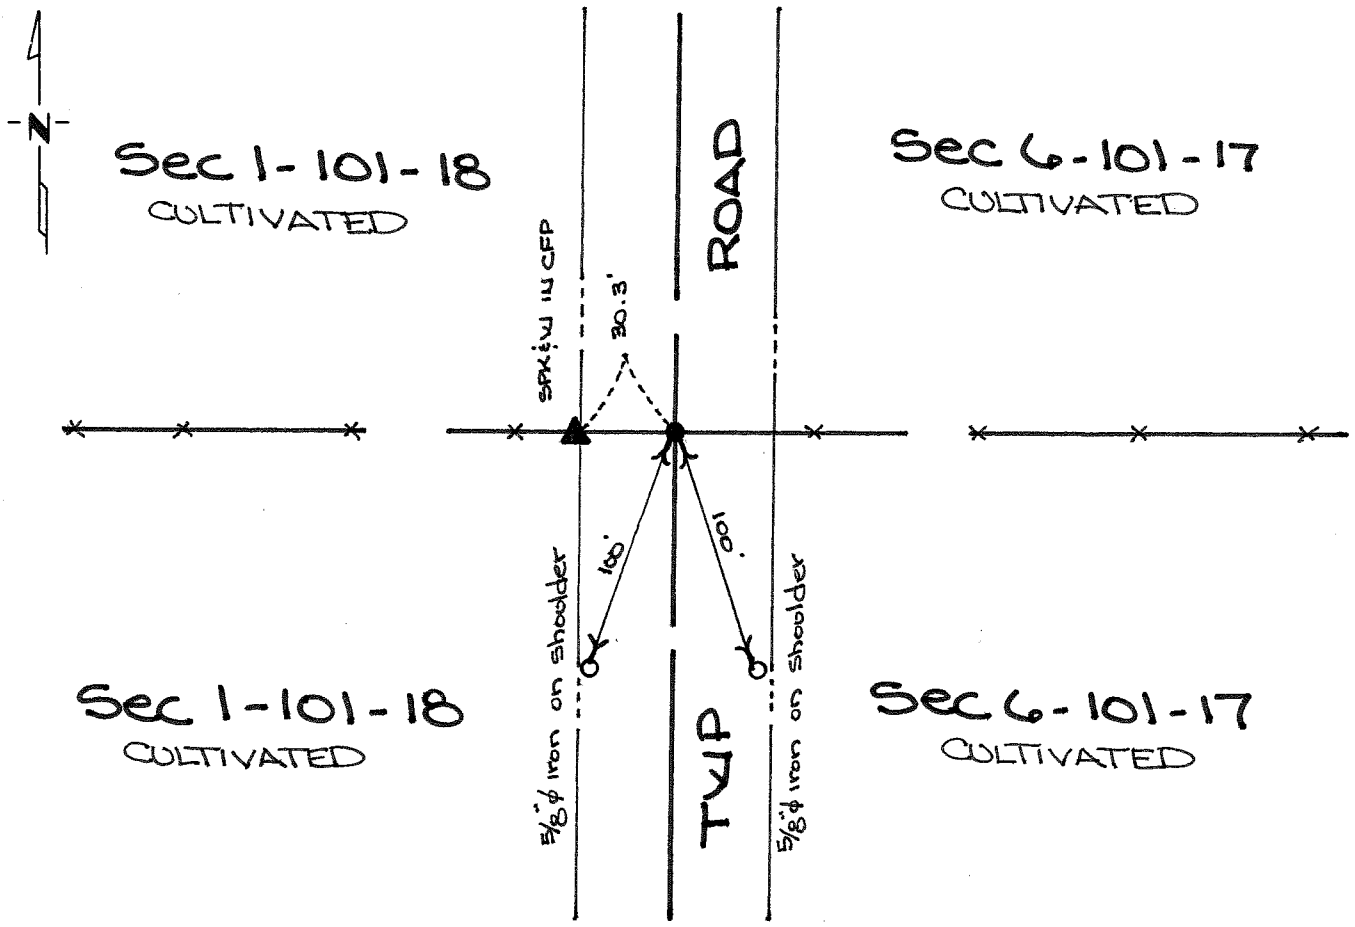

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 11-25-87
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W¼ corner Section 6-101-17

This corner was orignally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show corner was marked with a wood post and made mound of earth and trench.

Nov. 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

During researching corner no information was obtained of any perpetuation of ¼ corner.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline of north-south road in line with fence lines; east and west at a depth of 2.5 feet below road surface in virgin soil a 3" diameter charred wood post was uncovered. Set a cast iron monument stamped "¼ corner" over the location of wood post.

Monument found fits occupation and road centerlines within the section and is accepted as the public land survey corner or a perpetuation thereof.

Index No. "I" P. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a gray granite pointed field stone

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a 5/8"ϕ x 24" iron on east side of stone, set Cast Iron monoment over stone

SKETCH OF REFERENCE TIES

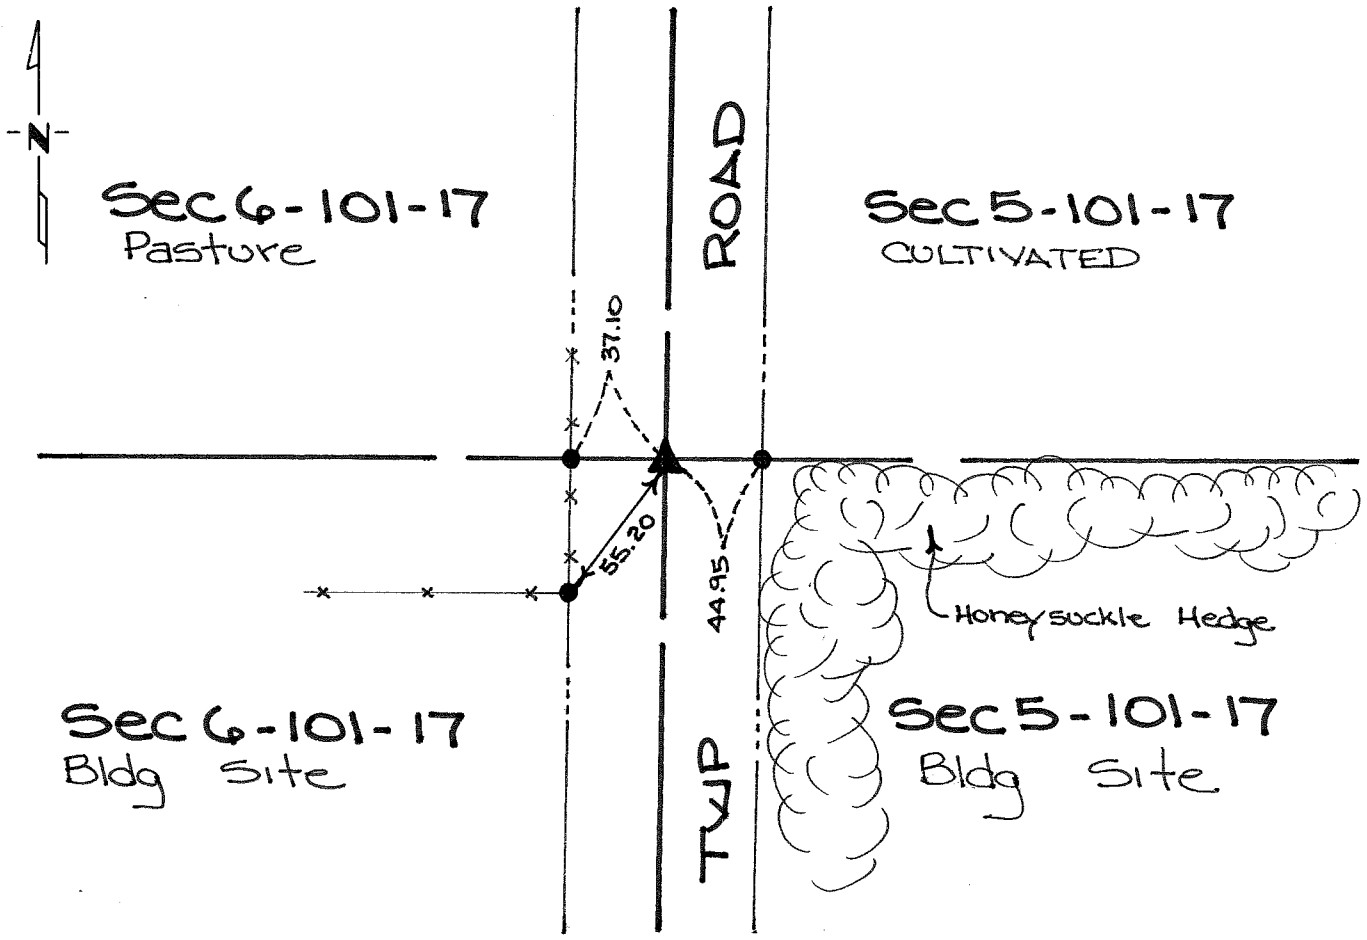

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-25-87 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E¼ corner Section 6-101-17

In 1854:
This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office. Government notes show corner was marked with a wood post and charred stake with mound and trench.

November 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

During research done on this corner no record could be found of anyone uncovering corner since government survey.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe at 2640 feet north of southeast corner of section as per government notes and found nothing. After taking measurements within the section we dug a 20'x5'x5' deep hole at a location determined by doubling over the distance found between occupation lines on the east line of the SE¼ SE¼ and uncovered a large gray pointed granite stone three feet deep in virgin soil. Placed a 5/8"ø iron on the east side of stone and set cast iron monument over stone.

The stone monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

"B" p 74

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a Cast iron monoment

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

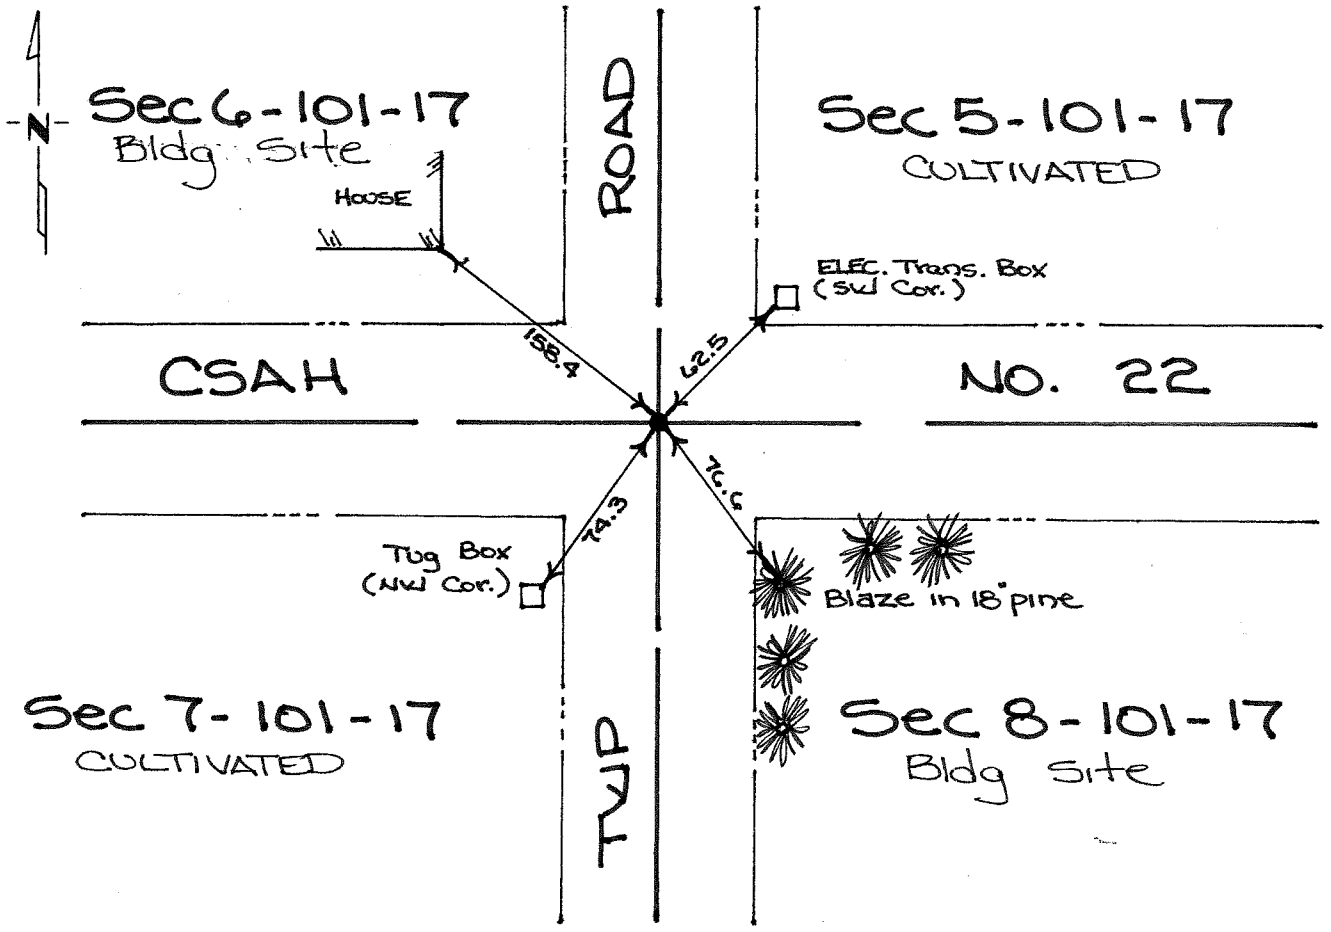

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 11-25-87
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 6-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post and charred stake with mound and trench.

Nov. 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department

The following information was obtained from the Mower County Engineer:

1936 Grading Plan shows corner was marked by a limestone during grading project.

1978-1981 County Highway Department personnel tied off the 1936 corners and regraded the road. A 3 foot more or less,core cut was made the entire length of the project which would have destroyed original public land survey corner or a perpetuation thereof.

June 1981 Mower County Highway Department placed cast iron monument using ties and stationing obtained during grading project.

1987 Jones, Haugh & Smith Inc crew located cast iron monument using ties taken by County in 1981.

Monument found fits the record, past surveys and occupation lines, and road centerlines within the section and is in agreement with stationing from 1936 grading plan and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "A" p 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a Cast iron monument

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

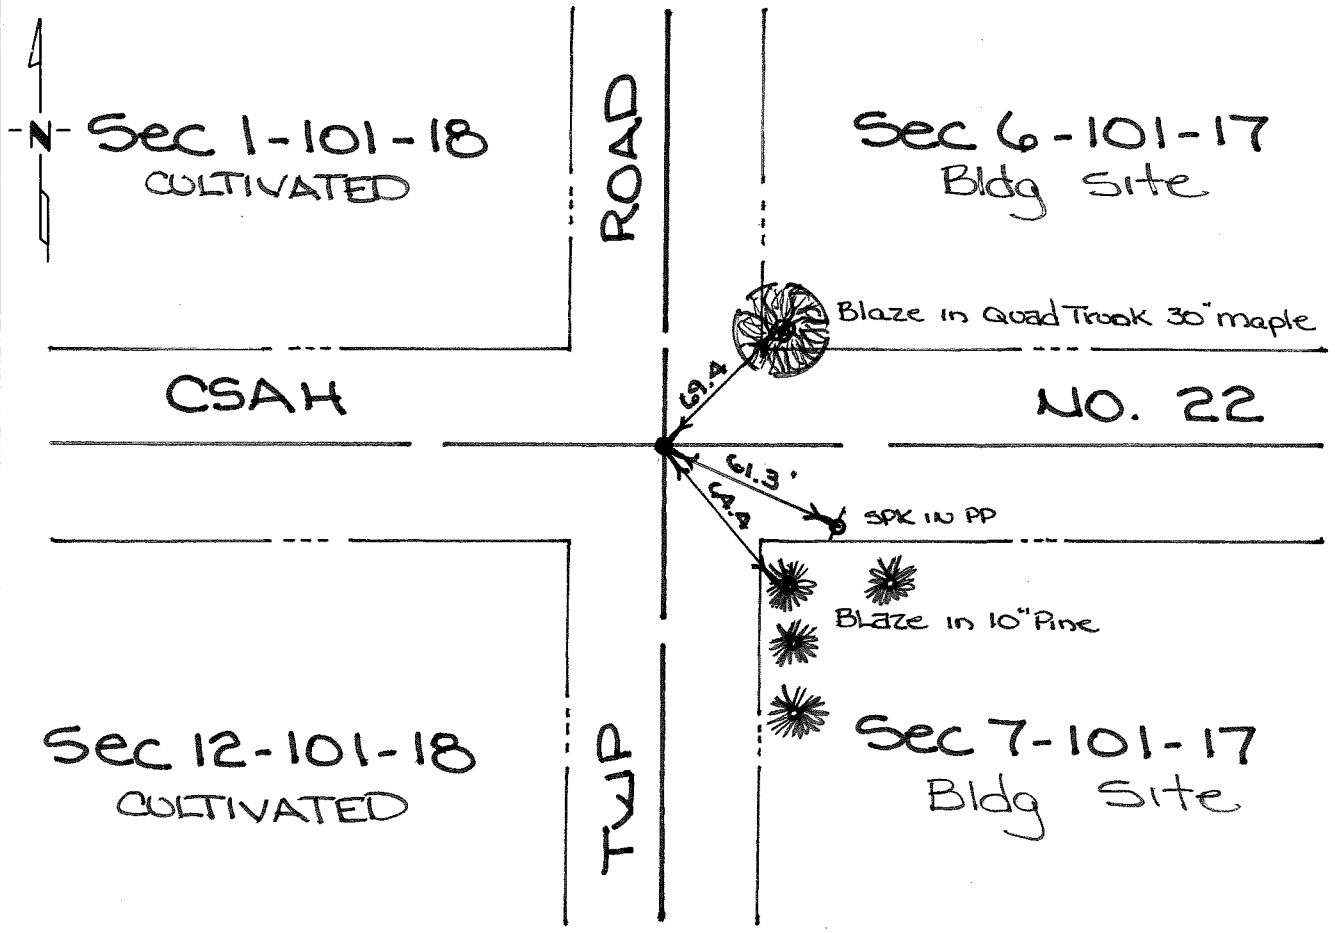

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-25-87

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 6-101-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1854. The government notes show corner marked with a wood post and charred stake.

In November 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department

The following information was obtained from the Mower County Engineer:

The 1936 County Grading Plan shows a wagon skein marked corner during grading project and ties were taken.

1978-1981 County Highway Department personnel tied off the 1936 corners and regraded the road. A 3 foot more or less, core cut was made the entire length of the project which would have destroyed the public land survey corner or a perpetuation thereof.

June 1981 Mower County Highway Department set cast iron monument using ties and stationing obtained during grading project.

Nov. 1987 Jones, Haugh & Smith Inc crew located cast iron monument using ties set by County Highway Department.

Monument fits the record, past surveys, occupation lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "H," p 74 "B" p 130

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a 5/8"ϕx24" iron over a 2" sq. wood stake in virgin soil

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a Cast iron monument stamped "1/4 corner"

SKETCH OF REFERENCE TIES

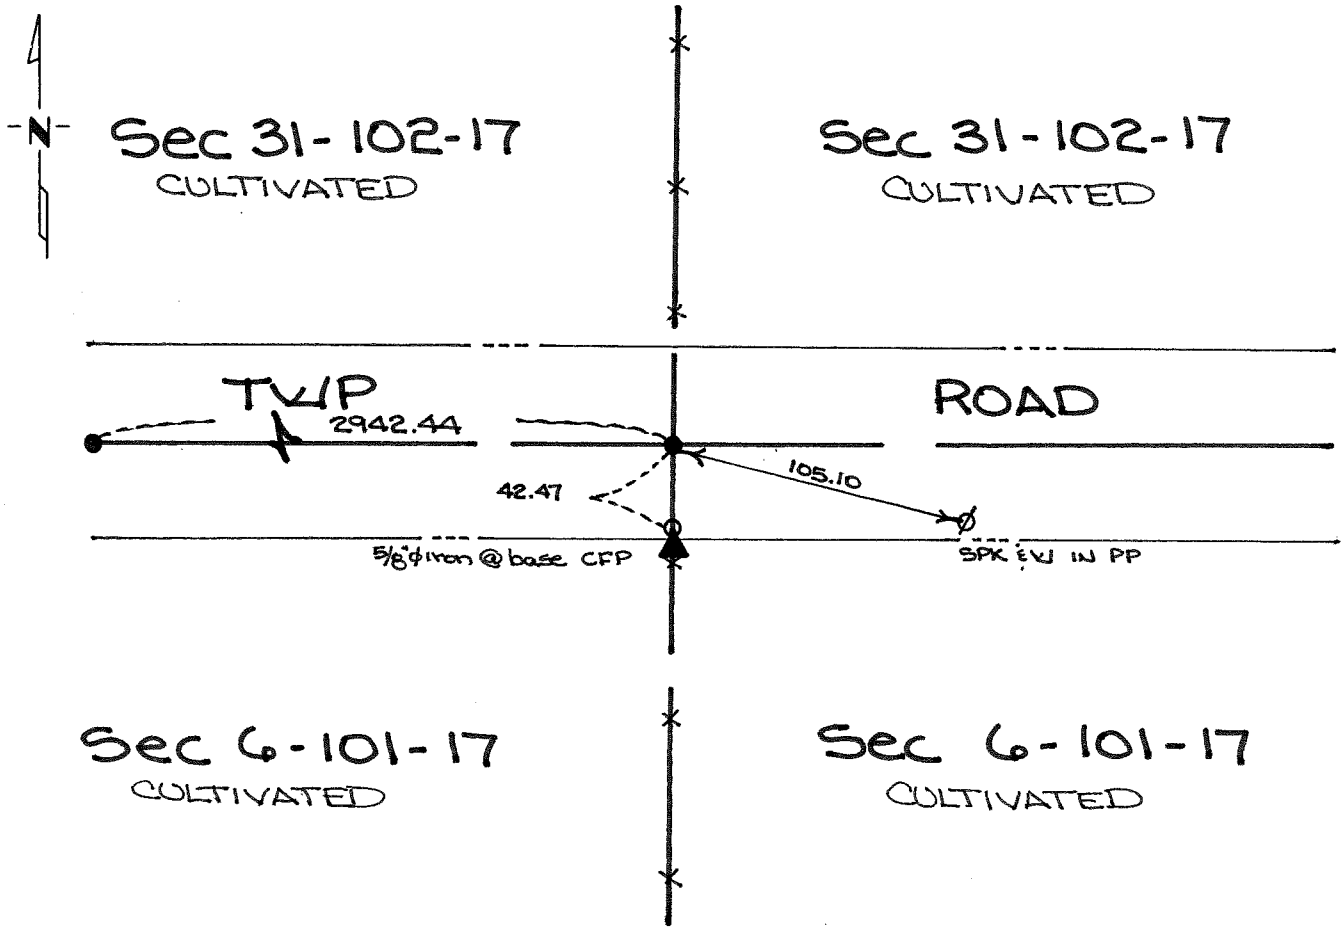

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 11-25-87 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$N\frac{1}{4}$ corner Section 6-101-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show corner was marked with a wood post and charred stake and made mound of earth with trench.

November 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

Records from Clausen in 1888 show he uncovered the original government post during a private land survey.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe on the centerline east-west road in line with fences north and south and at a depth of one foot below road surface uncovered a 5/8"ø x 24" iron. Continued digging and at a depth of 3.5 feet more or less, uncovered a 2" square wood stake in virgin soil. Set cast iron monument stamped "$\frac{1}{4}$ corner" over stake.

Monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 10, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a 5/8" X 2.5' IRON 6" BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

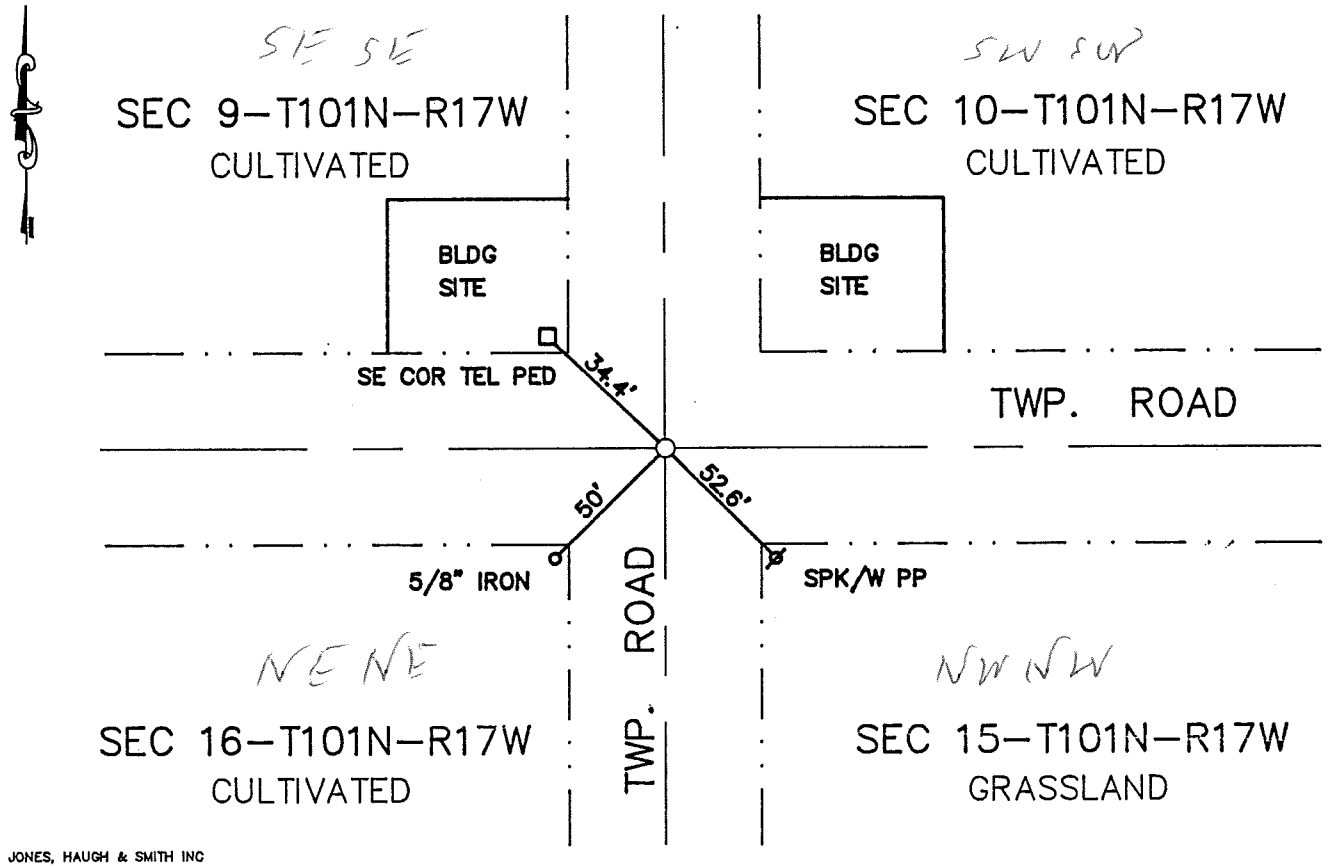

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

[signature] 3-17-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 18 day of March A.D., 1997

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 451742

M.H.D. FORM NO. 2105 BOOK 94 PAGE 366 Book 94 Misc Page 366

SW Cor SEC 10-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the intersection of township road E-W and N-S. Located a 5/8" iron 0.50' below road surface. Continued digging to virgin soil and found no other evidence of original PLS corner. Placed a 5/8" iron capped #13807 on the north side of iron found. Placed a cast monument over iron found.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 10, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/30/1995 (DATE) found a ROCK 1.5' X 2.8' 6" BELOW ROAD SURFACE

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☐ On 05/30/1995 (DATE) placed a CAST IRON MONUMENT OVER ROCK FOUND

SKETCH OF REFERENCE TIES

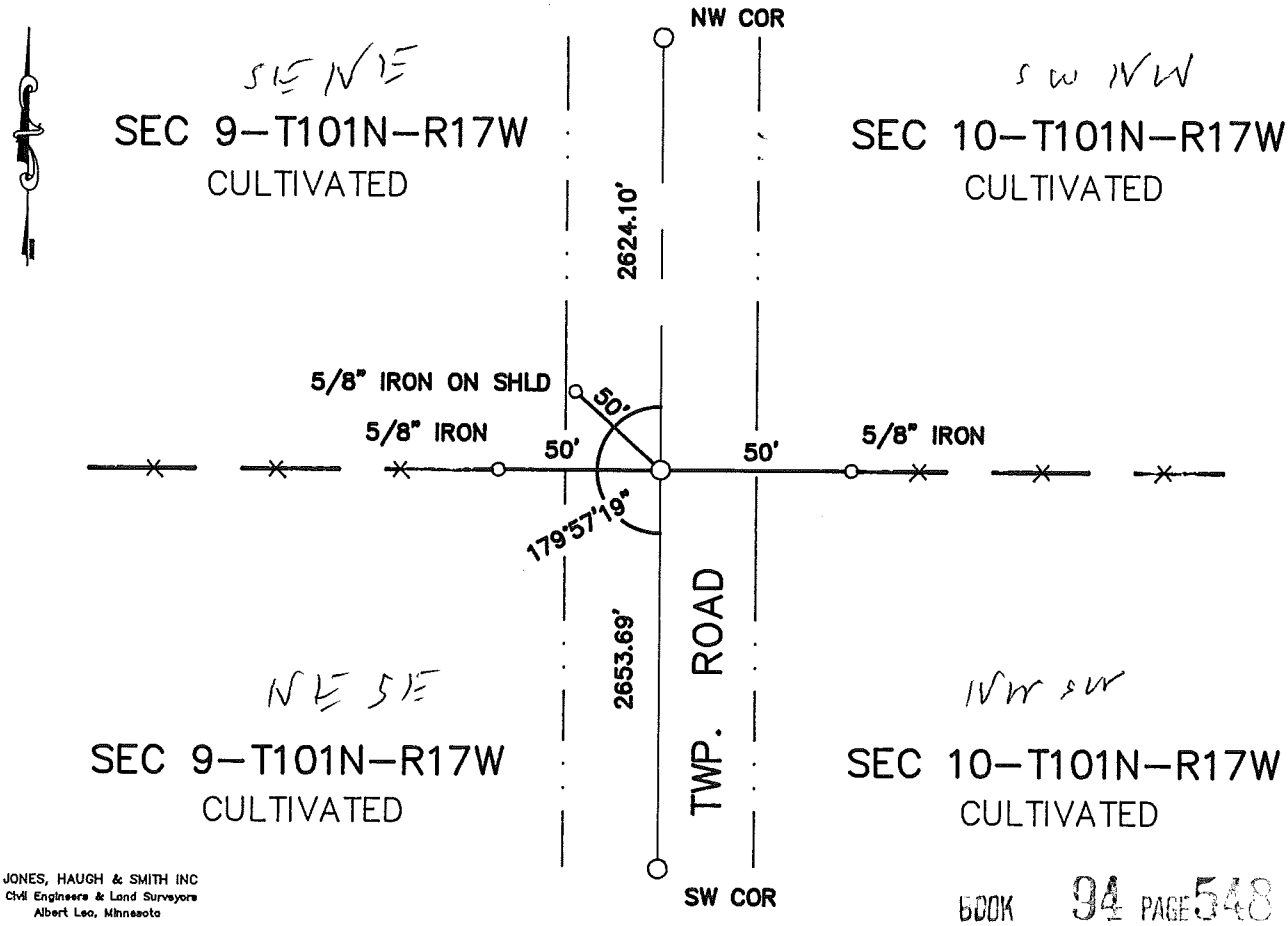

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 548

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-7-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452223

M.H.D. FORM NO. 2105

Book 94 Misc Page 548

W 1/4 Cor SEC 10-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road N-S and in line with line fence E-W. Located a 1.5'x2.8' stone 0.60' below the road surface. Continued digging to virgin soil and found no other evidence of original PLS corner. Lowered stone to 2.0' below road surface. Placed a 5/8" iron capped #13807 next to the stone. Placed a cast iron monument over stone 4" below road surface.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On — (DATE) found a —

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/24/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

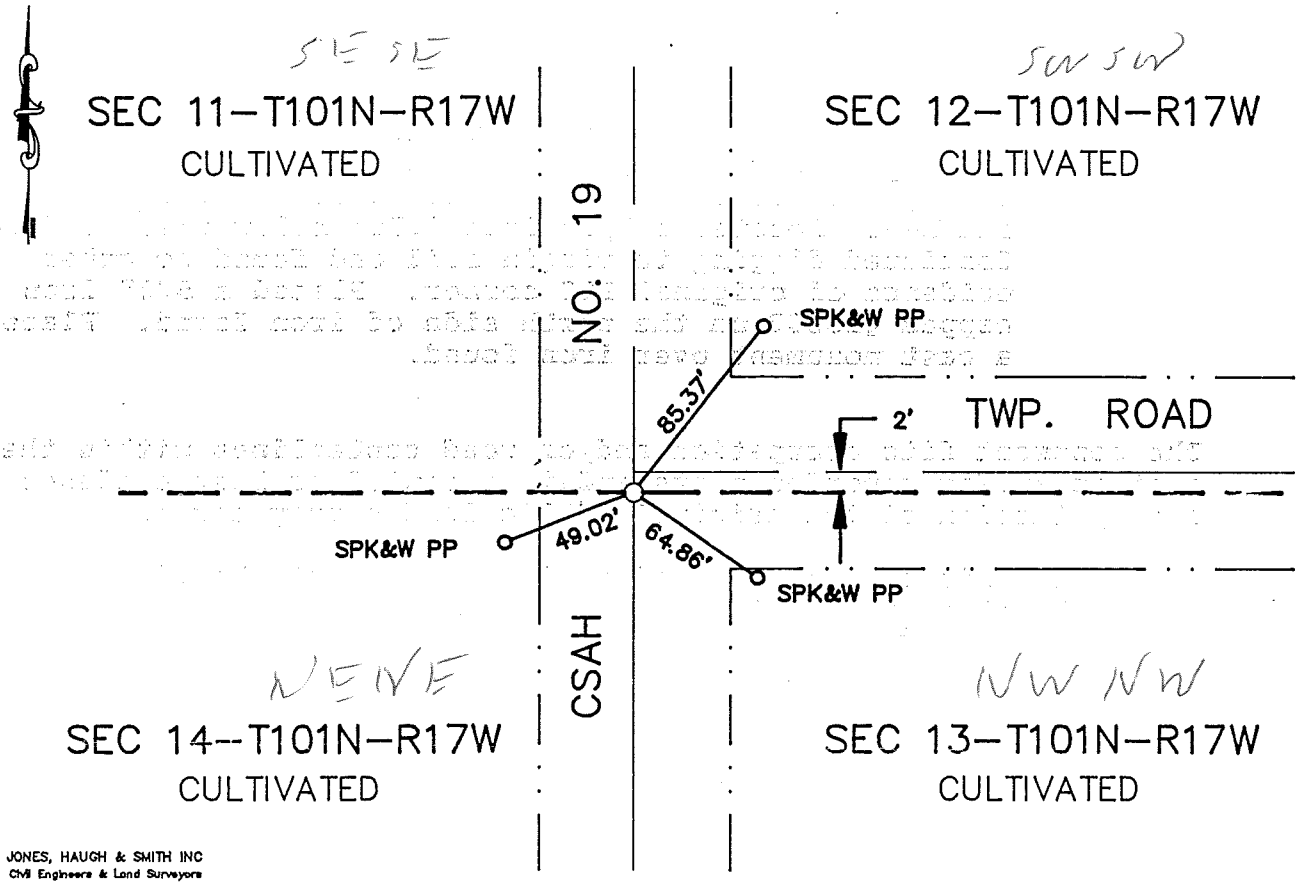

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 18 day of May A.D., 1997

COUNTY RECORDER Charles Evans

By Susan M. Davis, Deputy

DOCUMENT NO. 451743

M.H.D. FORM NO. 2105 BOOK 94 PAGE 368 Book 94 Misc Page 368

SE Cor SEC 11-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 19 N-S and in line with field division west and CL of township road east. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on line from west quarter corner and NE corner at 5281.2' south of NE corner per Mower County Highway Department records.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 11, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/24/1996 (DATE) found a 1/2 X 2' IRON CAPPED

☐ left monument as found, ☐ lowered monument, ☒ removed monument (explain)

☐ On 10/24/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

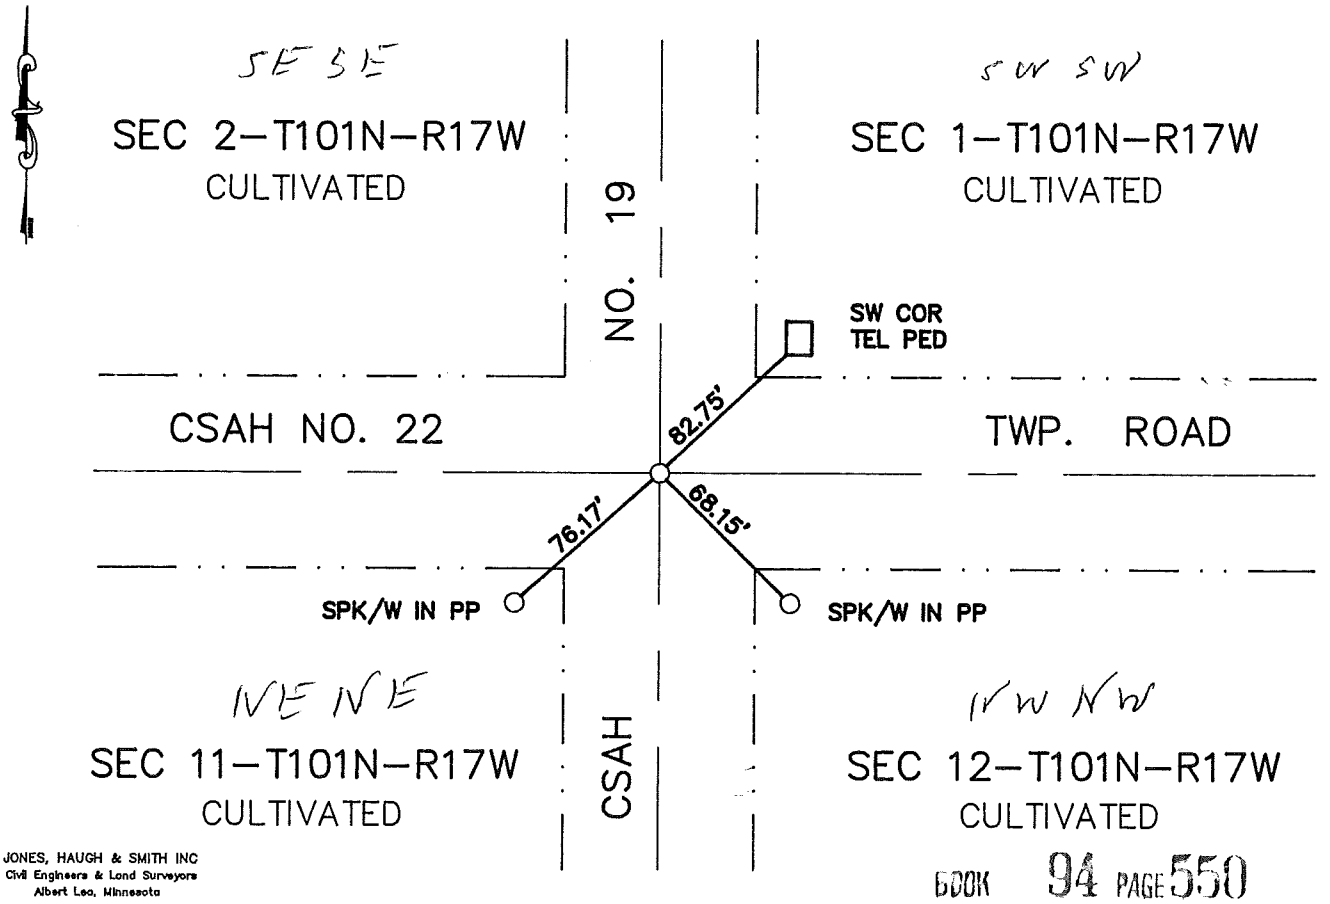

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 550

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lewis, Deputy

DOCUMENT NO. 452224

M.H.D. FORM NO. 2105

Book 94 Misc Page 550

NE Cor SEC 11-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department records state a stone at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 19 N-S and CL of CSAH No. 22 west and CL of township road east. Uncovered a 1/2"x2' iron capped. Continued digging to virgin soil and found no other evidence of original PLS corner. Accepted iron as perpetuation of original PLS corner and replaced iron with a cast iron monument 4" below the road surface.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 16, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/22/1989 (DATE) found a SPK&W OVER RR SPIKE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/07/2002 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

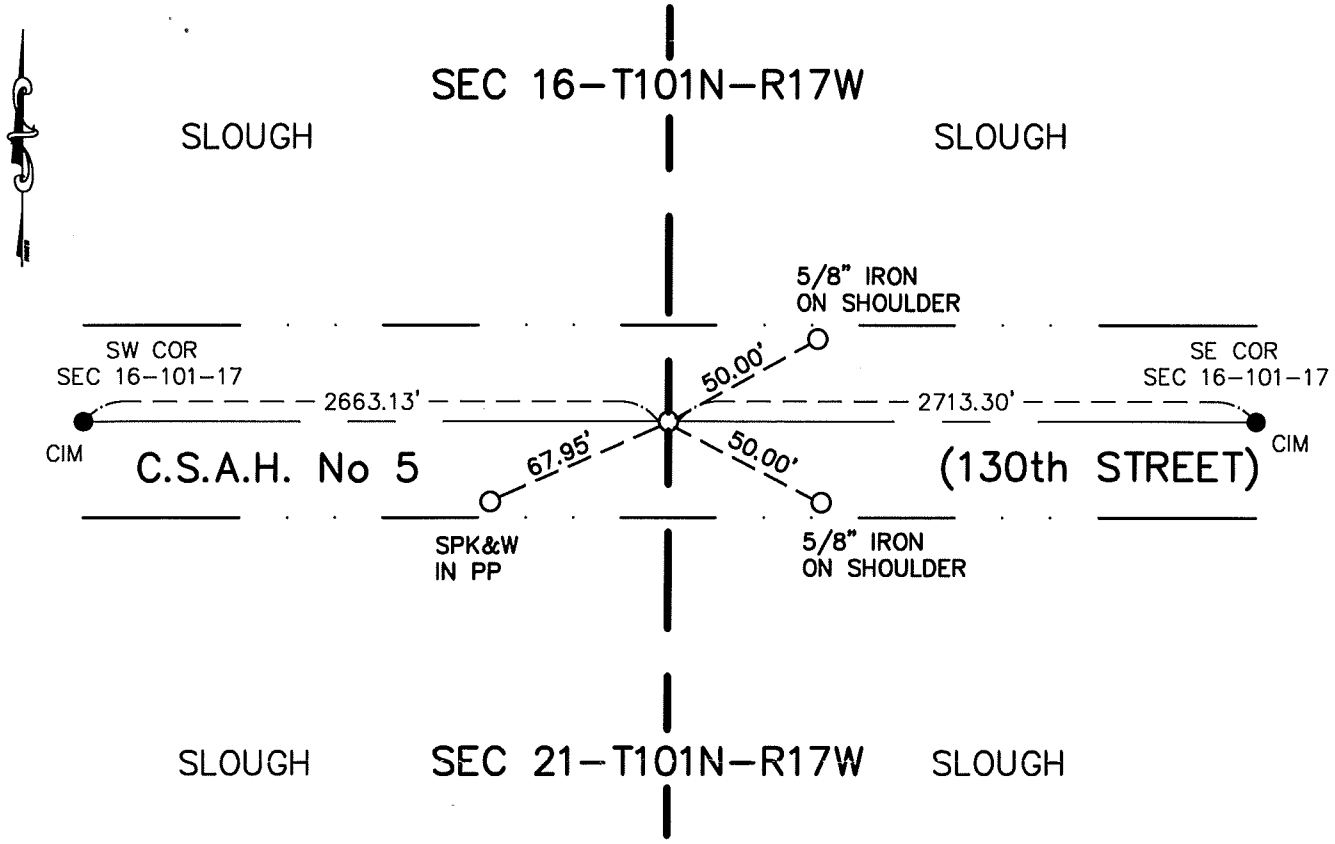

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 5-28-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S ¼ COR SEC 16-101-17

Deputy Surveyors Charles Phipps & Edward Fitzpatrick of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1922 Mower County Highway Dept. road plan shows no monument at this location. Corner falls in a marshy area.

1958 Minnesota D.N.R. records state a RR spike was set at the intersection of centerline of C.S.A.H. No 5 and fence running south.

1969 Mower County Highway Dept. road plan shows no monument at this location.

1989 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found a RR spike.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of hole in bituminous and found nothing. Reset corner using the distances from section breakdown sheet and 1958 D.N.R. records. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. p136 "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON A STRAIGHT LINE AT MIDPOINT BETWEEN NE & NW CORNERS.

SKETCH OF REFERENCE TIES

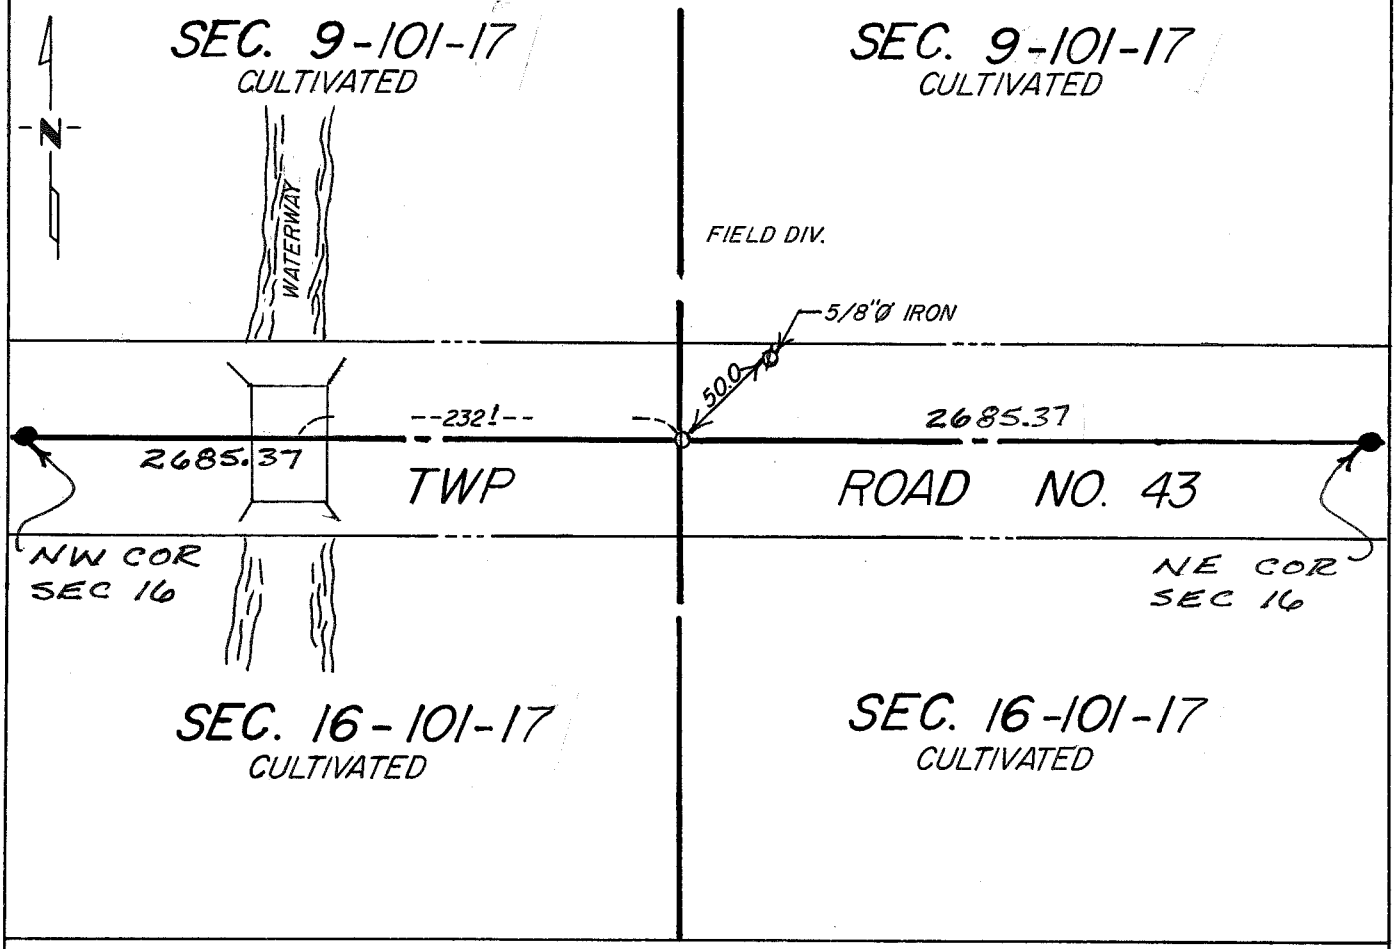

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Mark H. Schwartz 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug a hole 5'x30'x4' deep and found no further evidence of public land survey or a perpetuation thereof.

Therefore we placed a 5/8" diameter x 16" iron capped RLS 13807 on a straight line and at the midpoint between northeast & northwest section corners. This location fits occupation and road centerlines within the section and is accepted as
best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

p.71 "K"
Index No. p.136 "H"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON THE ROAD SURFACE CENTERLINE IN LINE WITH FIELD DIVISION.

SKETCH OF REFERENCE TIES

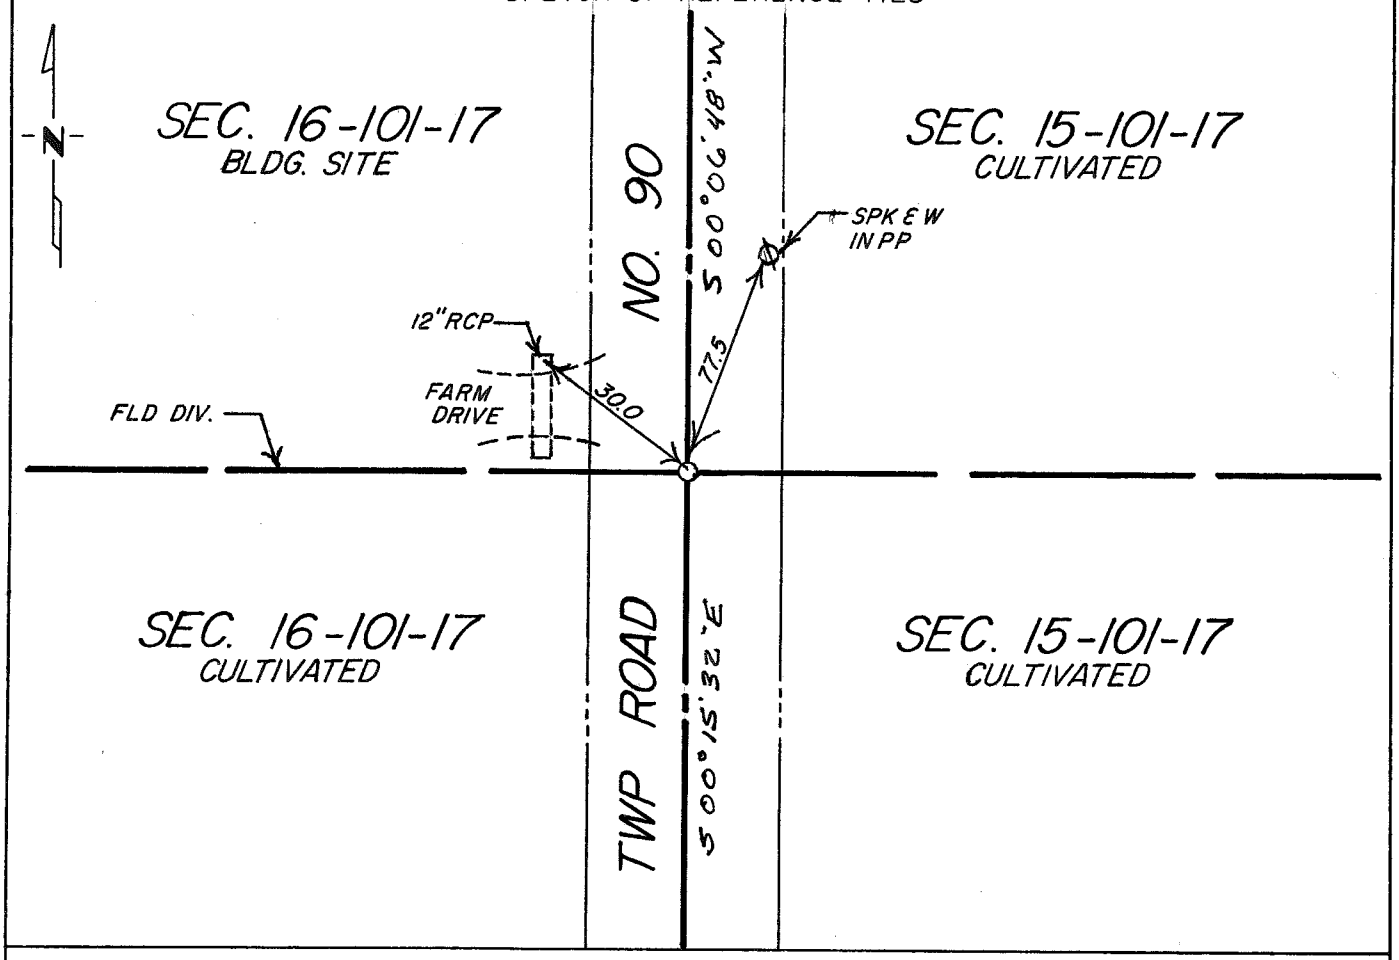

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-21-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N¼ corner Section 16-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith together with the Mower County backhoe operator dug a hole 6'x12'x5' deep and found no further evidence of public land survey corner or a perpetuation thereof.

Therefore placed a 5/8"Øx16" iron capped 13807 at the midpoint between the northwest & southwest section corners on the centerline of the existing township road. This location fits occupation and road centerlines within the section.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-22-89 (DATE) found a capped 5/8"Ø iron on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

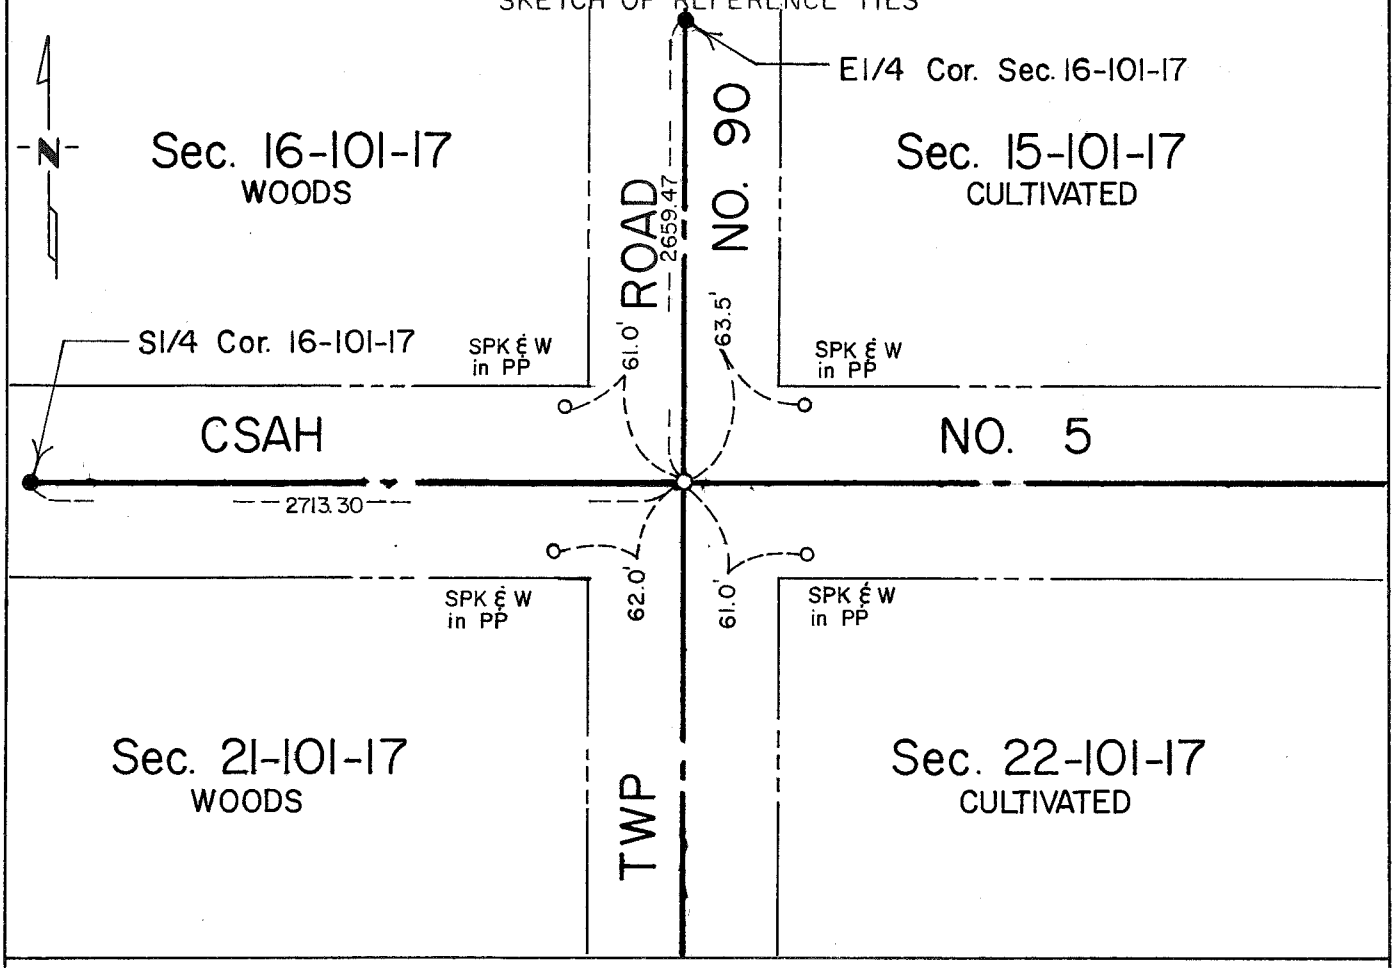

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-18-90 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 16-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the General Land Office in 1854. The government notes show this corner was marked with a charred stake and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1967 Records from Book 'A' in the County Engineer's Office shows a concrete monument inplace over field stone and ties were taken.

1985 Jones, Haugh & Smith Inc under the direction of John H. Schulte IV, found a concrete monument 1.5 feet below road surface on centerline centerline of north-south-east-west roads. Placed a capped (13807) 5/8" diameter iron at road surface over monument found.

1990 Jones, Haugh & Smith crew found a capped 5/8" diameter iron at road surface on centerline centerline of north-south-east-west roads.

Corner found fits road centerlines and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-22-89 (DATE) found a capped 5/8" Ø iron on ℄℄ of N-S-E-W roads.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

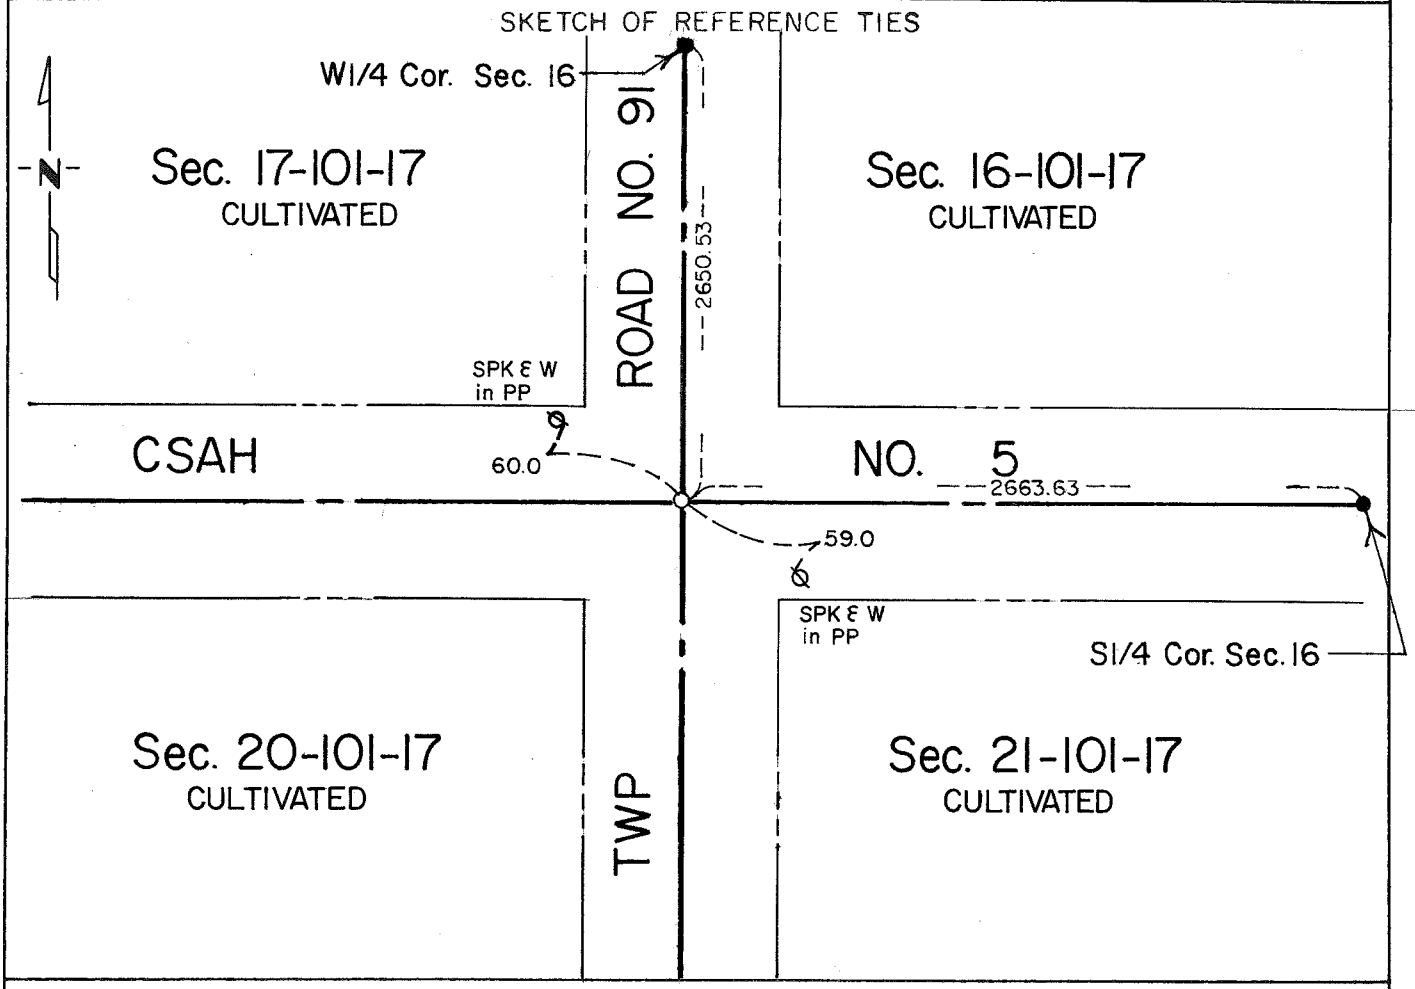

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 9-10-90 (DATE)

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 16-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the General Land Office in 1854. The government notes show this corner was marked with a charred stake and a trench with a mound of earth.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1985 Jones, Haugh & Smith Inc under the direction of John H. Schulte IV, found a concrete monument 2.0 feet below road surface on centerline centerline of north-south-east-west roads. Placed a capped (13807) 5/8" diameter iron at road surface over monument found.

1990 Jones, Haugh & Smith crew found a capped 5/8" diameter iron at road surface on centerline centerline of north-south-east-west roads.

Corner found fits occupation and road centerlines within the section and is accepted as best evidence and perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. p136, "I"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 16, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø x 16" IRON CAPPED RLS 13807 ON CENTERLINE OF NORTH-SOUTH ROAD AT MIDPOINT BETWEEN NW & SW CORNERS.

SKETCH OF REFERENCE TIES

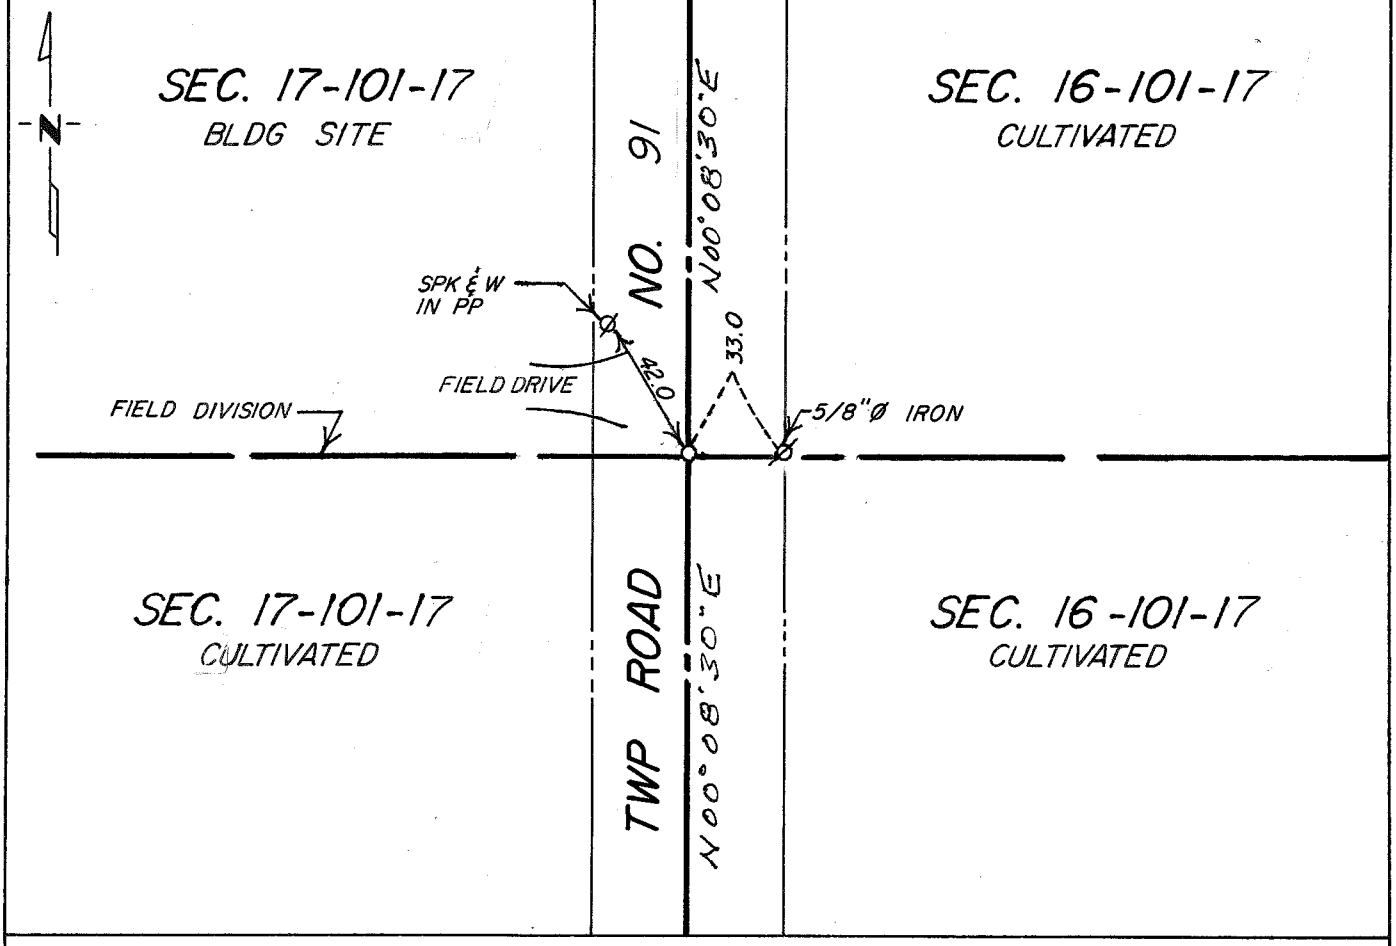

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 16-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the United States General Land Office in 1854. The government notes show this corner was marked with a charred stake in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1989 Jones, Haugh & Smith Inc. crew together with the Mower County backhoe operator dug and found no evidence of public land survey corner or a perpetuation thereof.

Therefore placed a 5/8" diameter x 16" iron capped RLS 13807 at midpoint of a straight line between the southwest & northwest corners. The location fits occupation and road centerlines within the section.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 19, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/2000 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

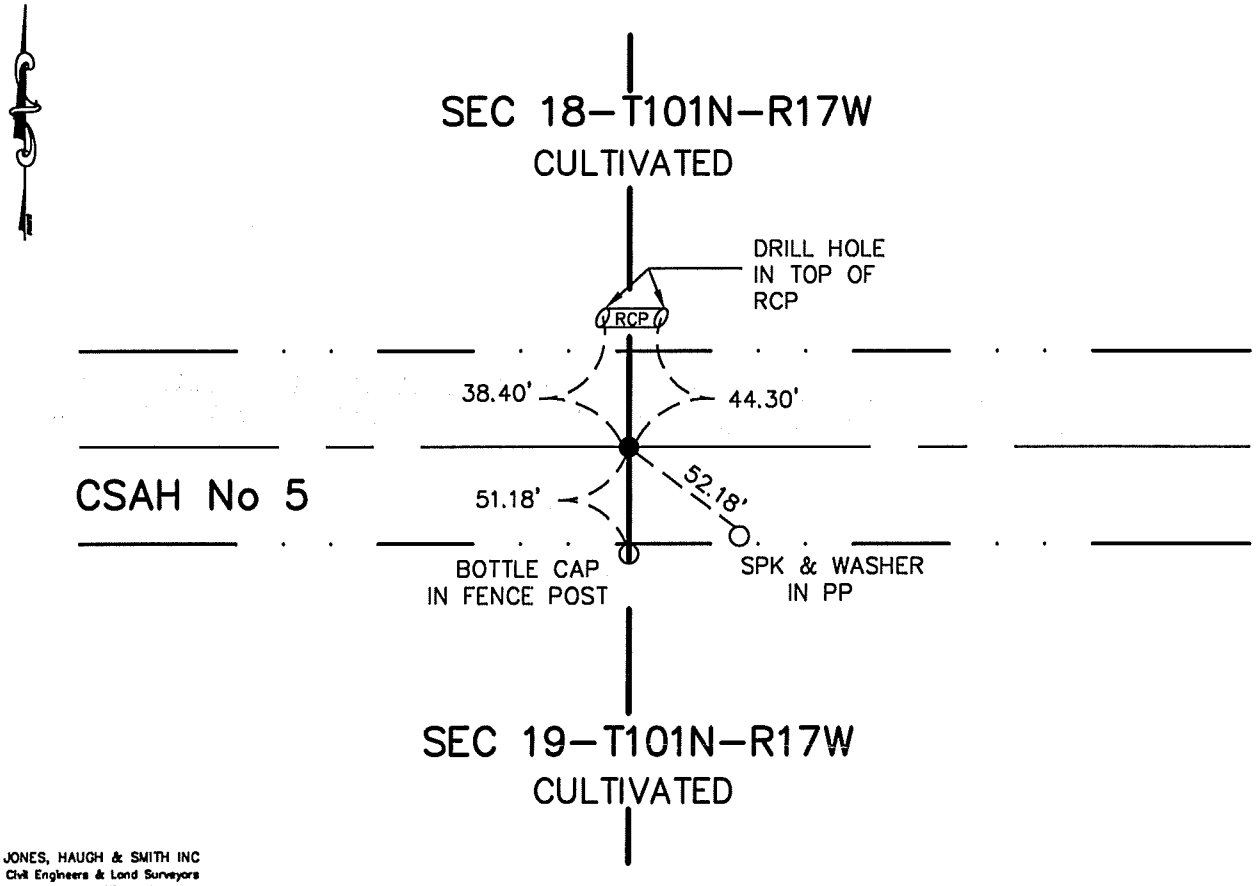

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 6-1-00 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Cor Sec 19-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1964 Mower Co. Highway Dept. personnel located this corner during regrading project, and tied out corner after grading project was completed.

1967 Mower County records state a concrete monument was in place.

1988 Mower Co. Highway Dept. personnel set Cast Iron Monument during base and bituminous project.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and uncovered a Cast Iron Monument 0.40′ below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 19, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/2000 (DATE) found a CONCRETE MONUMENT WITH A PIN IN CENTER

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/12/2000 (DATE) placed a 5/8 IRON WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

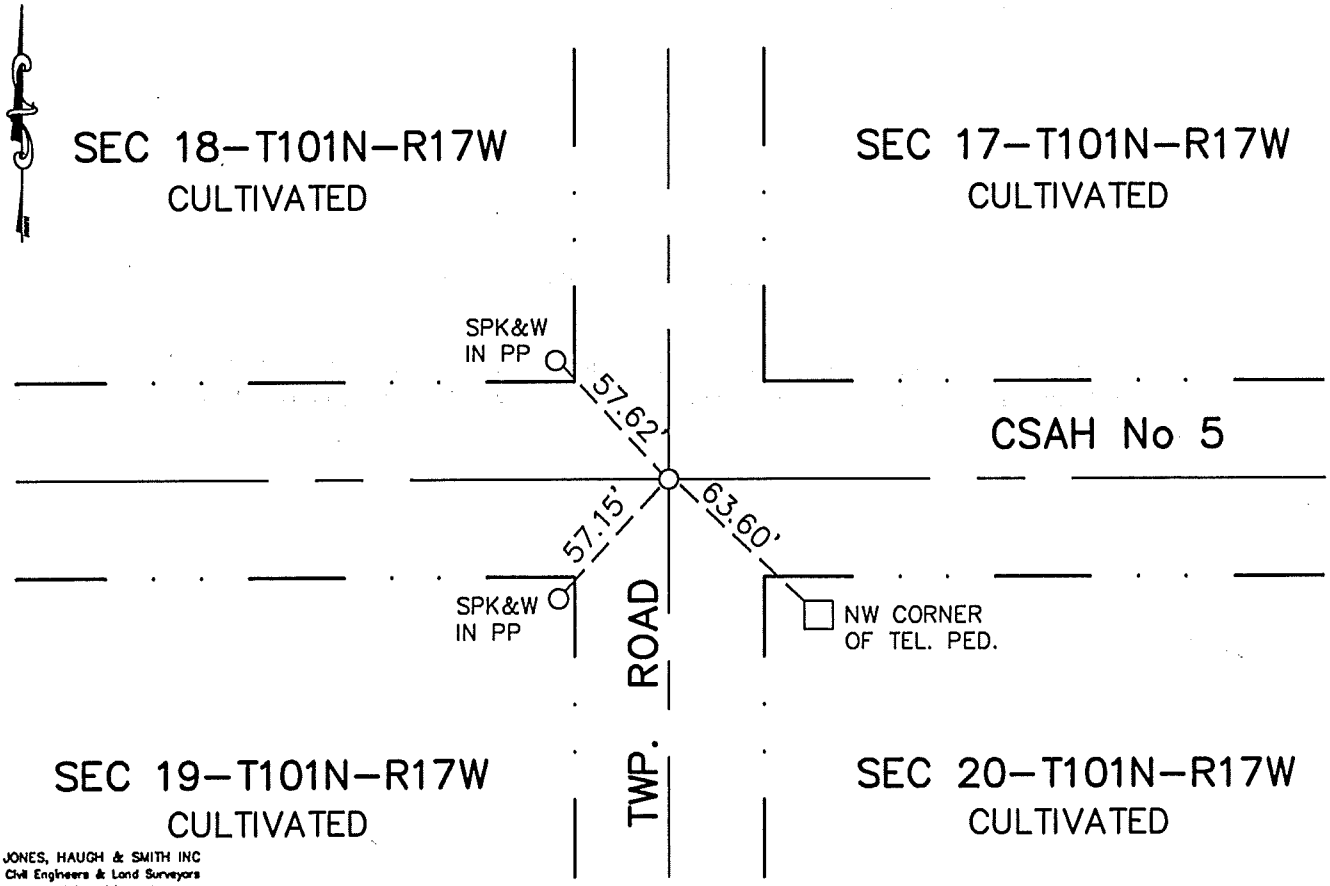

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-1-00

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 19-101-17

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1967 Mower County records state a concrete monument was in place.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at intersection of centerlines of CSAH 5 and Twp. Road. They uncovered a concrete monument with an iron pin in the center, 2' below road surface. Set a 5/8"x 16" iron with Cast Iron Monument 0.30' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 19, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/12/2000 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

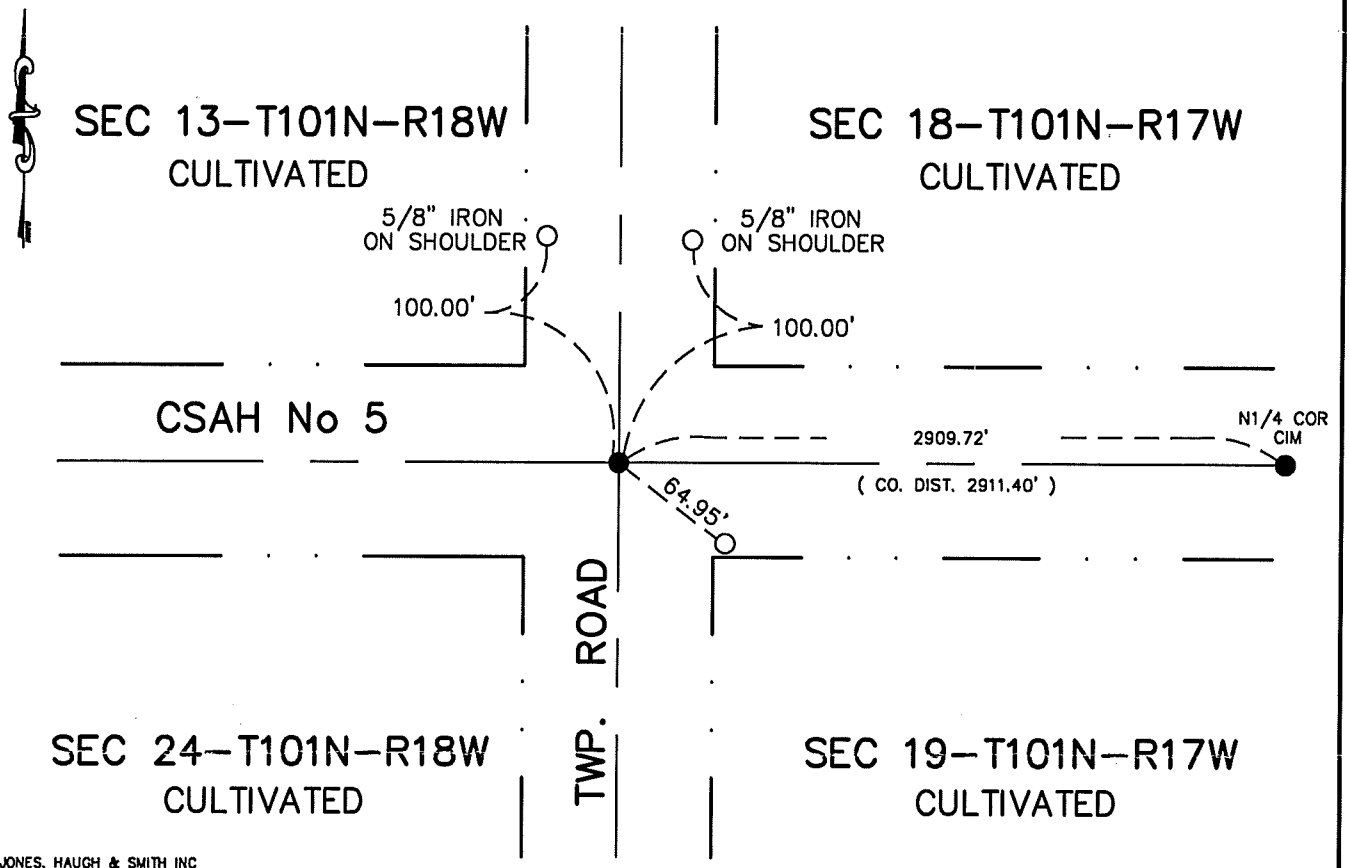

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 6-1-00
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor Sec 19-101-17

This corner was originally established by Deputy Surveyors Charles Phipps & Edward Fitzpatrick the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1964 Mower Co. Highway Dept. personnel located this corner during regrading project, and tied out corner after grading project was completed.

1967 Mower County records state a concrete monument was in place.

1988 Mower Co. Highway Dept. personnel set Cast Iron Monument during base and bituminous project.

2000 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and uncovered a Cast Iron Monument 0.30' below road surface. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 21, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-21-91 (DATE) found a 6"sq. x 28"long limestone 4' deep in virgin soil.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-21-91 (DATE) placed a 5/8"Ø iron on North side of stone and set a cast iron monument over stone at road surface.

SKETCH OF REFERENCE TIES

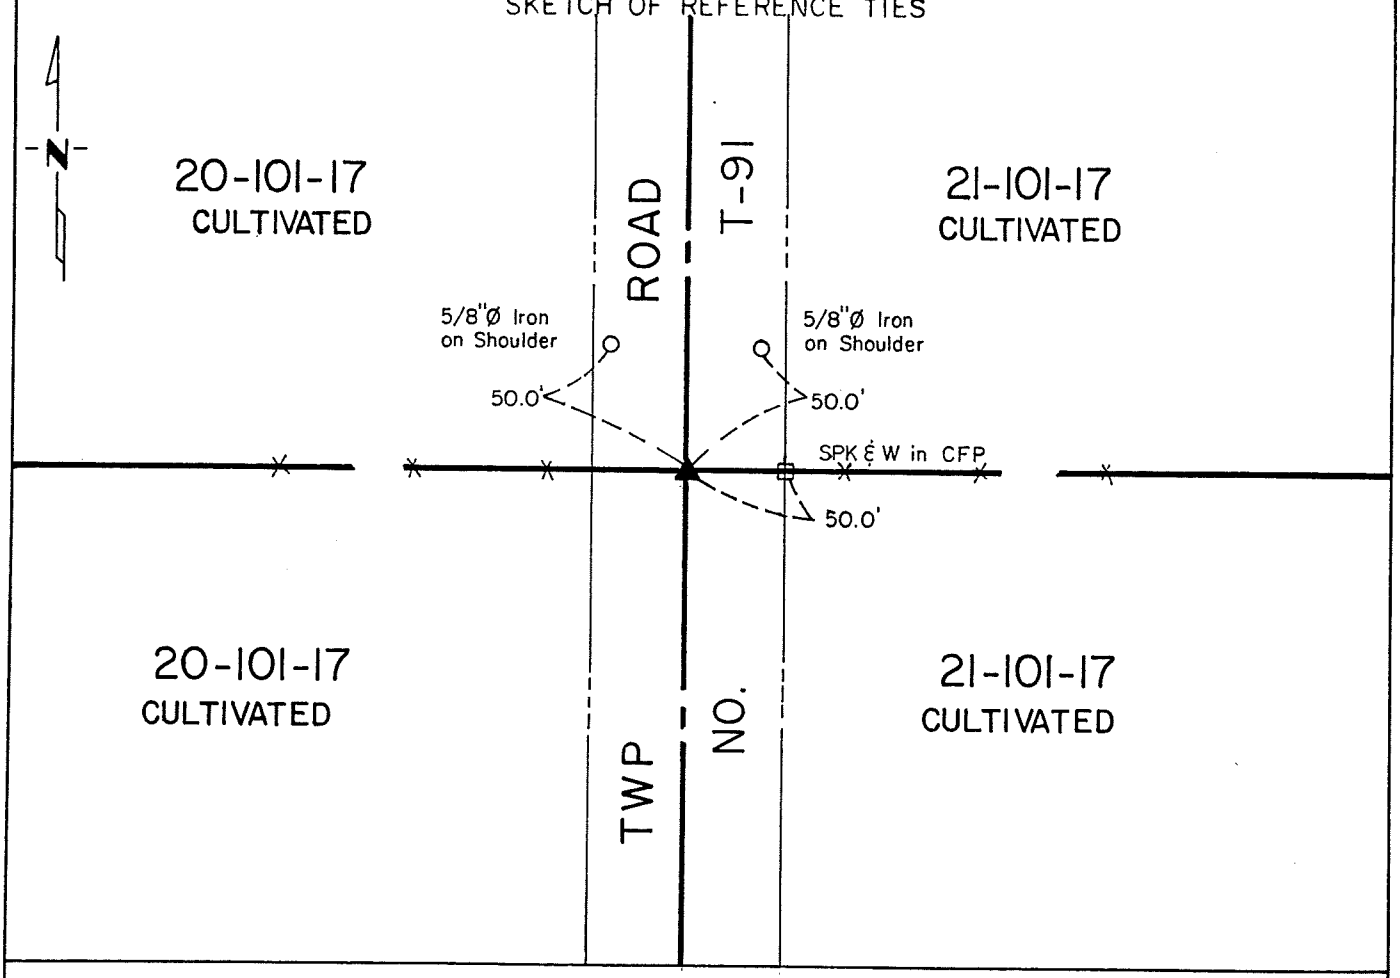

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 21-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline of north-south road in line with fence east and uncovered a 6"x6"x28" long limestone 4 feet deep in virgin soil. Placed a 5/8" diameter x 18" iron on north side of stone and set cast iron monument over stone on road surface.

The monument found fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 22, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-21-91 (DATE) found ⊕ no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-21-91 (DATE) placed a cast iron monument 0.5' below road surface on ℄ ℄ of N-S-E road in line with field division. west.

SKETCH OF REFERENCE TIES

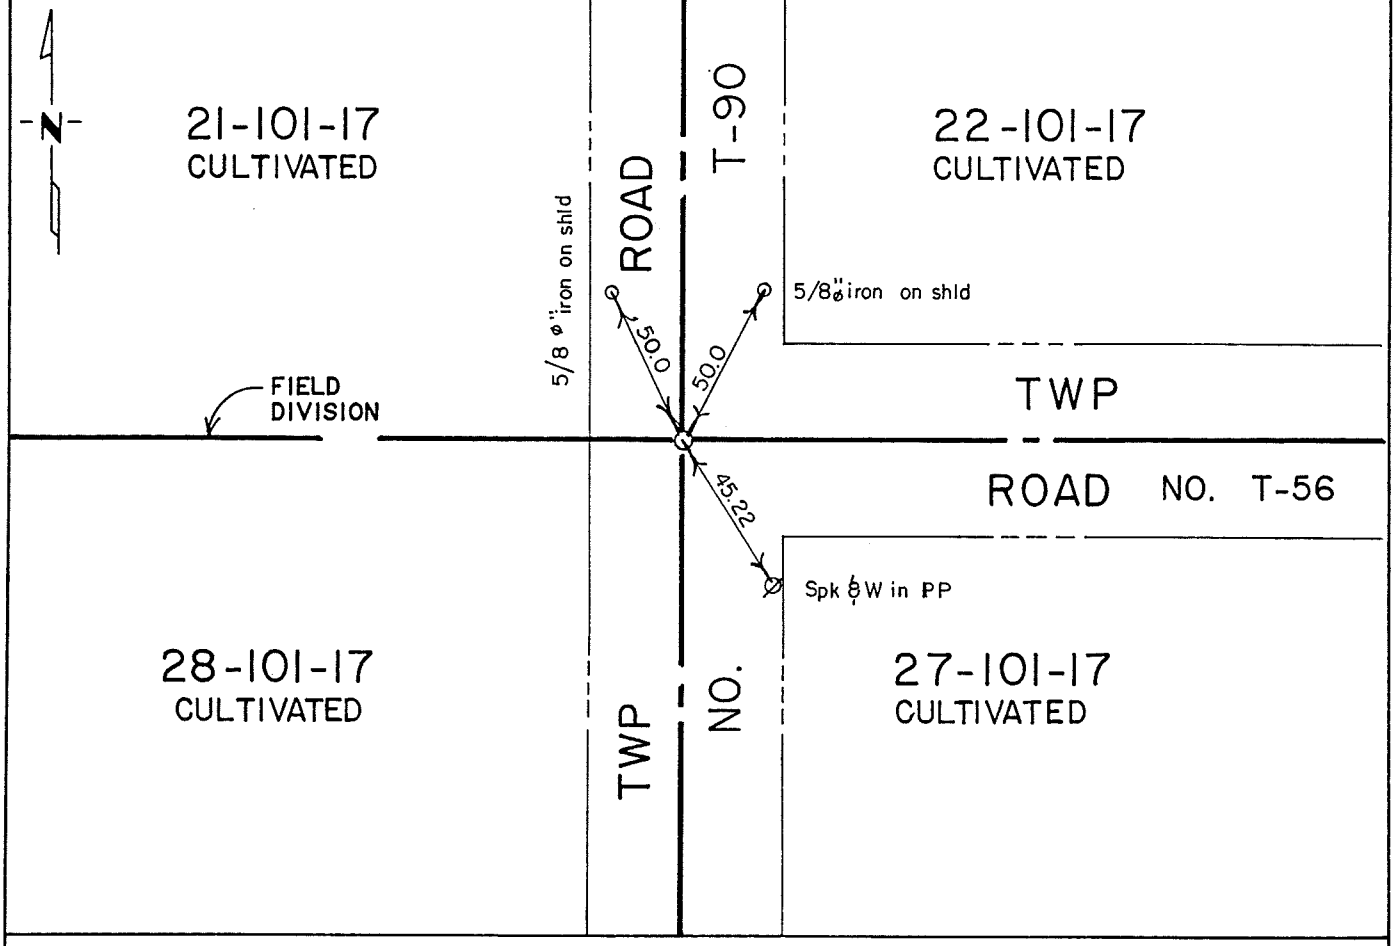

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 22-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline of north-south-east roads in line with field division west for Bridge Survey #2551. Dug a 5'x12'x5' deep hole and found no evidence of public land survey corner or a perpetuation thereof. At this location uncovered large GTE telephone cable crossing through intersection which may have destroyed any evidence. Placed cast iron monument on centerline of roads in line with field division west.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 22, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-21-91 (DATE) found a 12"Ø pointed stone 3' deep over a triangular limestone,

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-21-91 (DATE) placed a capped (13807) iron on South side of stone and set cast iron monument over stone on road surface.

SKETCH OF REFERENCE TIES

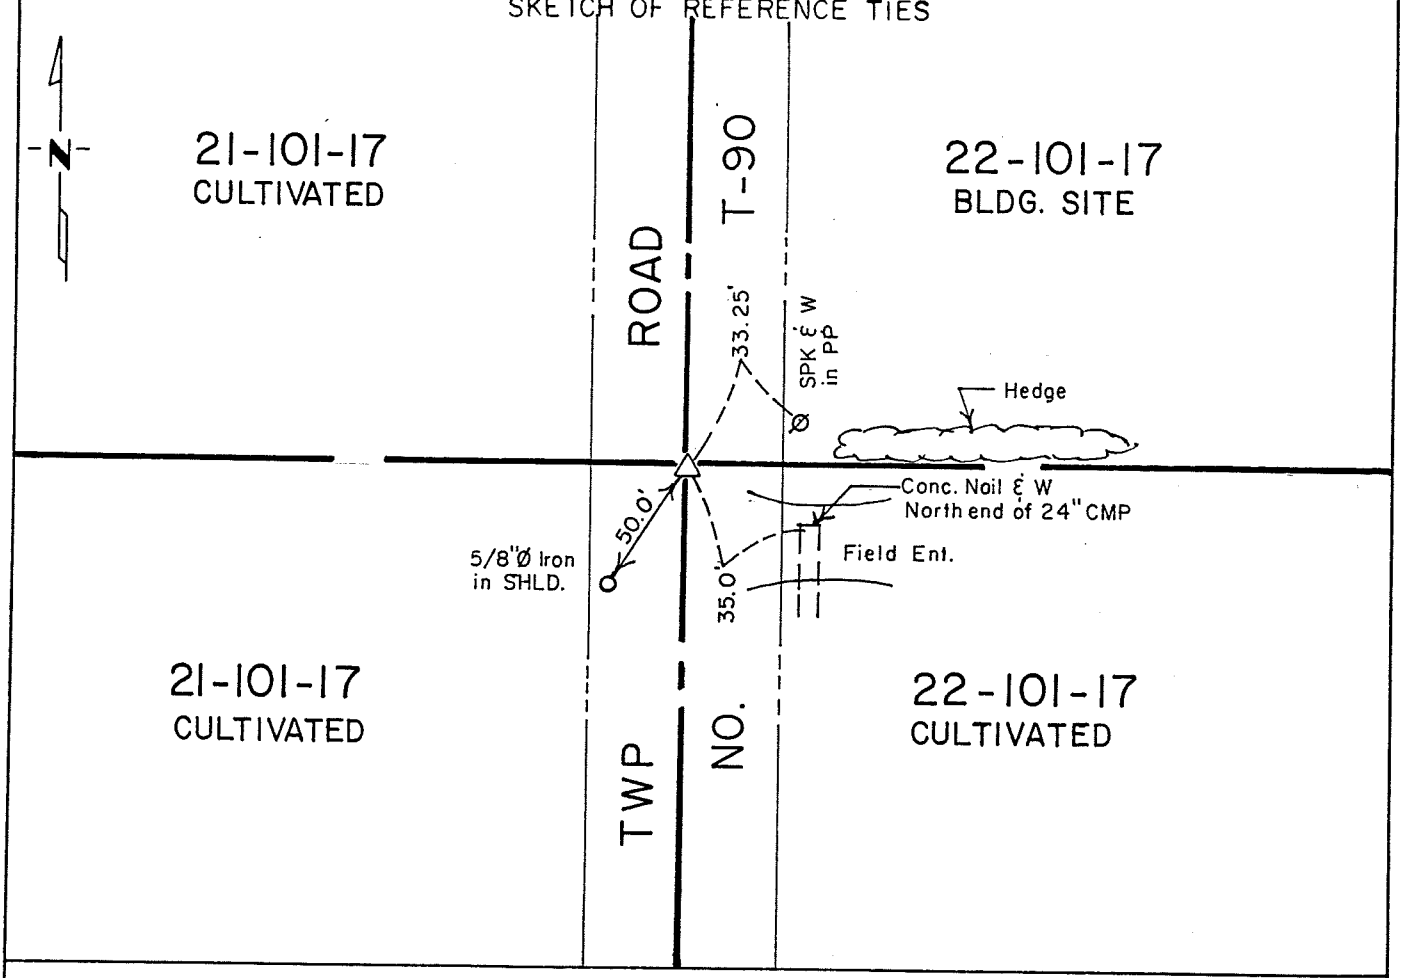

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 22-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline of north-south road for Bridge Survey No. L5035. Dug a 6'x15'x5' deep hole and uncovered a 12" diameter pointed stone 3 feet deep in virgin soil. Removed stone and found it to be over a triangular limestone. Placed 5/8" diameter x 18" iron on south side of limestone and set cast iron monument over stone on road surface.

The monument found fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "G" P136

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 22, Township 102N Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 1-29-93 (DATE) found a SPIKE IN 3/4"ø PIPE AND A 6"x8" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-29-93 (DATE) placed a 5/8"ø x 16" IRON CAPPED NO. 13807 ON NORTH SIDE OF STONE AND A 5/8"ø x 16" IRON CAPPED RLS NO. 13807 OVER STONE

SKETCH OF REFERENCE TIES

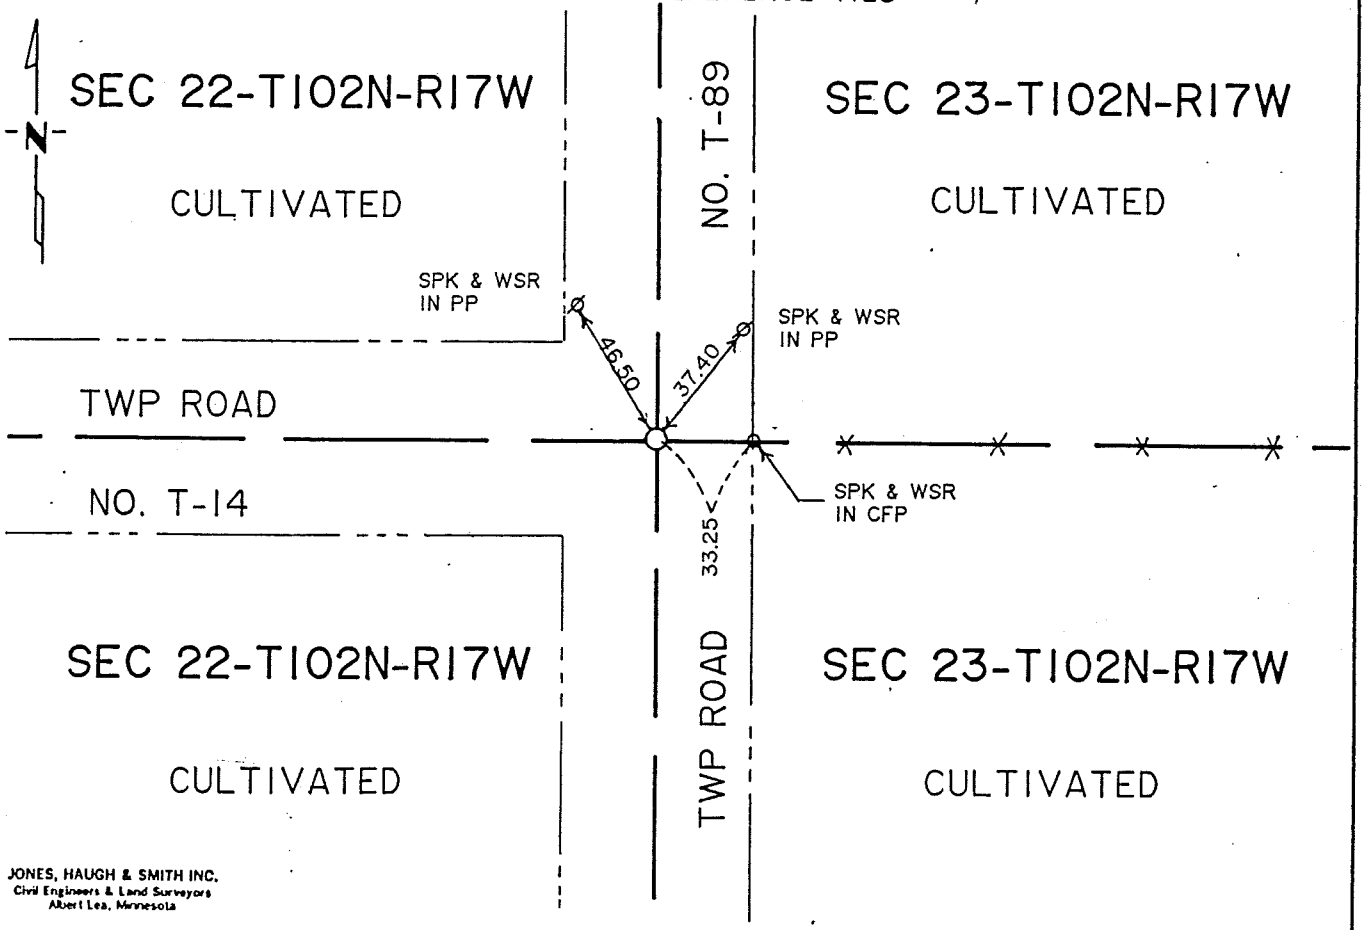

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 2-22-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 cor Sec 22-102-17

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of the perpetuation of the original public land survey corner:

1891 M.N. Clausen, Mower County Surveyor, field notes indicate a stone found at this split of the NE and SE cor. Split was measured at 40.12 chains.

1892 M.N. Clausen, Mower County Surveyor, field notes indicate a stone was found at the split between the NW and SW cor. Split was measured at 40.12 chains.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Freeborn County Surveyor, dug a 3'x3'x3' hole on centerline centerline of north, south, west roads and fence running east. Found a spike in 3/4" diameter pipe 0.8 feet deep. Continued digging and uncovered a 6"x8" pointed stone 2.5 feet deep. Therefore we accepted pointed stone as best evidence of the original public land survey corner as the stone found fits road centerlines and occupation of fence running east and also stone found was noted in 1891-1892 Clausen field notes.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic distances, angles and further analysis, contact Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 24, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-14-91 (DATE) placed a cast iron monument at midpoint on a straight line between Section Corners.

SKETCH OF REFERENCE TIES

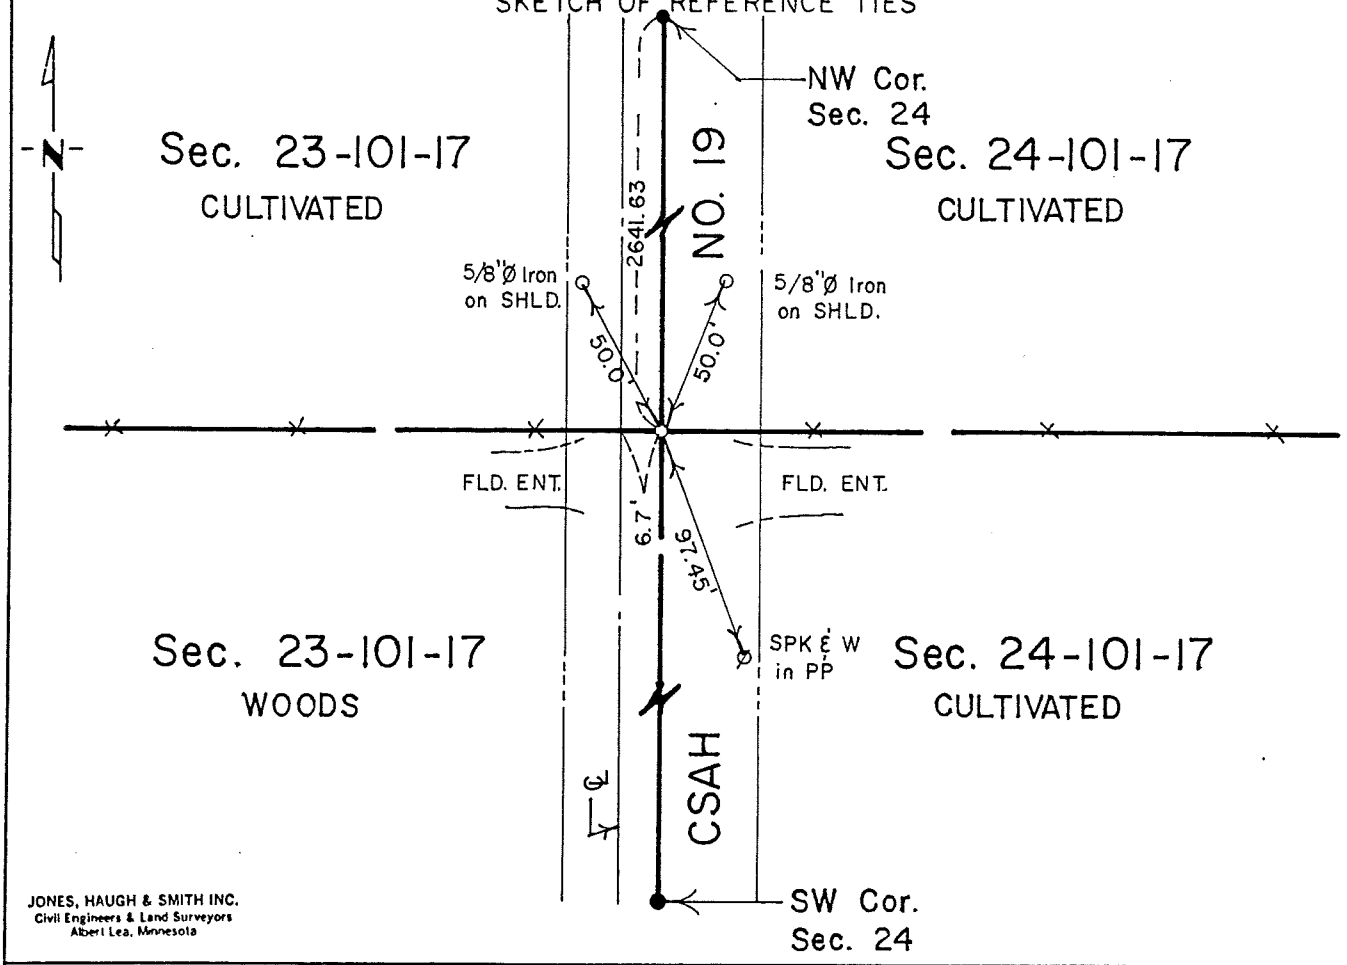

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 24-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline N-S road in line with E-W fences for bituminous overlay project SAP. Excavated a 10' x 12' x 6' deep hole and found no evidence of a public land survey corner. Placed a cast iron monument at split on straight line.

The monument placed fits occupation lines is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 24, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a broken harrison monument over a large bridge spike over a 8"x14" pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a 5/8"ø iron on West side of stone, cast iron monument over stone on road surface.

SKETCH OF REFERENCE TIES

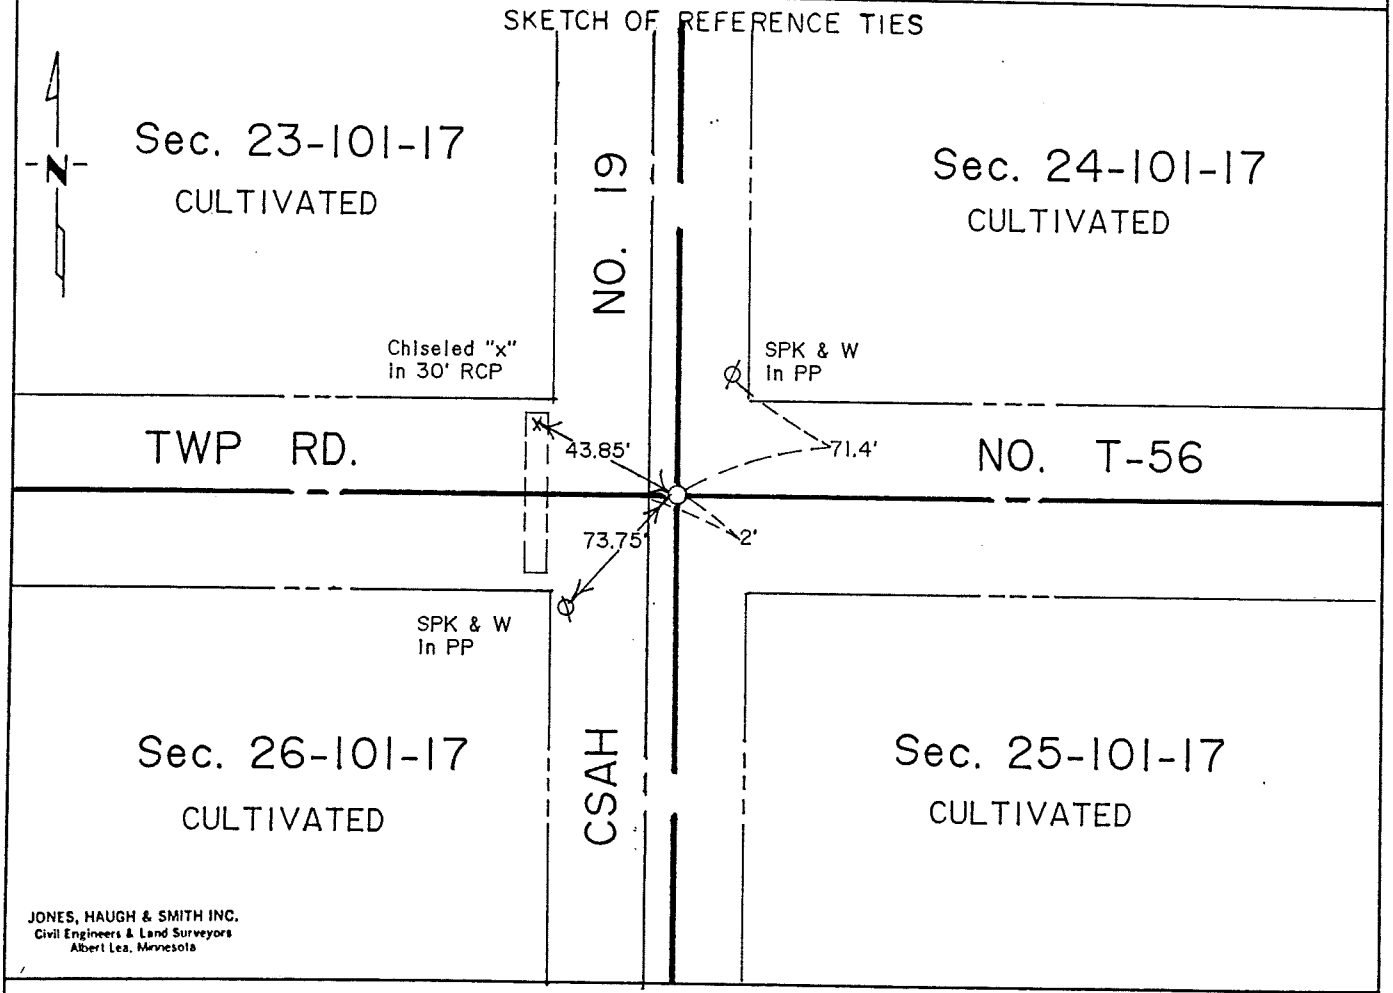

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 5-16-91 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 24-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1888 Clausen, Mower County Surveyor 1880-1892, notes show a government corner inplace.

Book "A" in the Mower County Engineers Office shows the corner located. The following ties were taken:

63.2' SE to T.P.
53.6' NE to P.P.
63.2' SW to West gate post
77.0' NE to SE corner school barn

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-619-14. Excavated a 4' x 8' x 5' deep hole and uncovered a broken harrison monument 2.0' deep. Continued digging and uncovered a large bridge spike over a 8" x 14" pointed field stone 4.0' below road surface in virgin soil. Placed a 5/8" diameter iron on West side of the stone and a cast iron monument on the road surface over the stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 24, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-10-91 (DATE) found a cast iron monument 1.5' below road surface

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

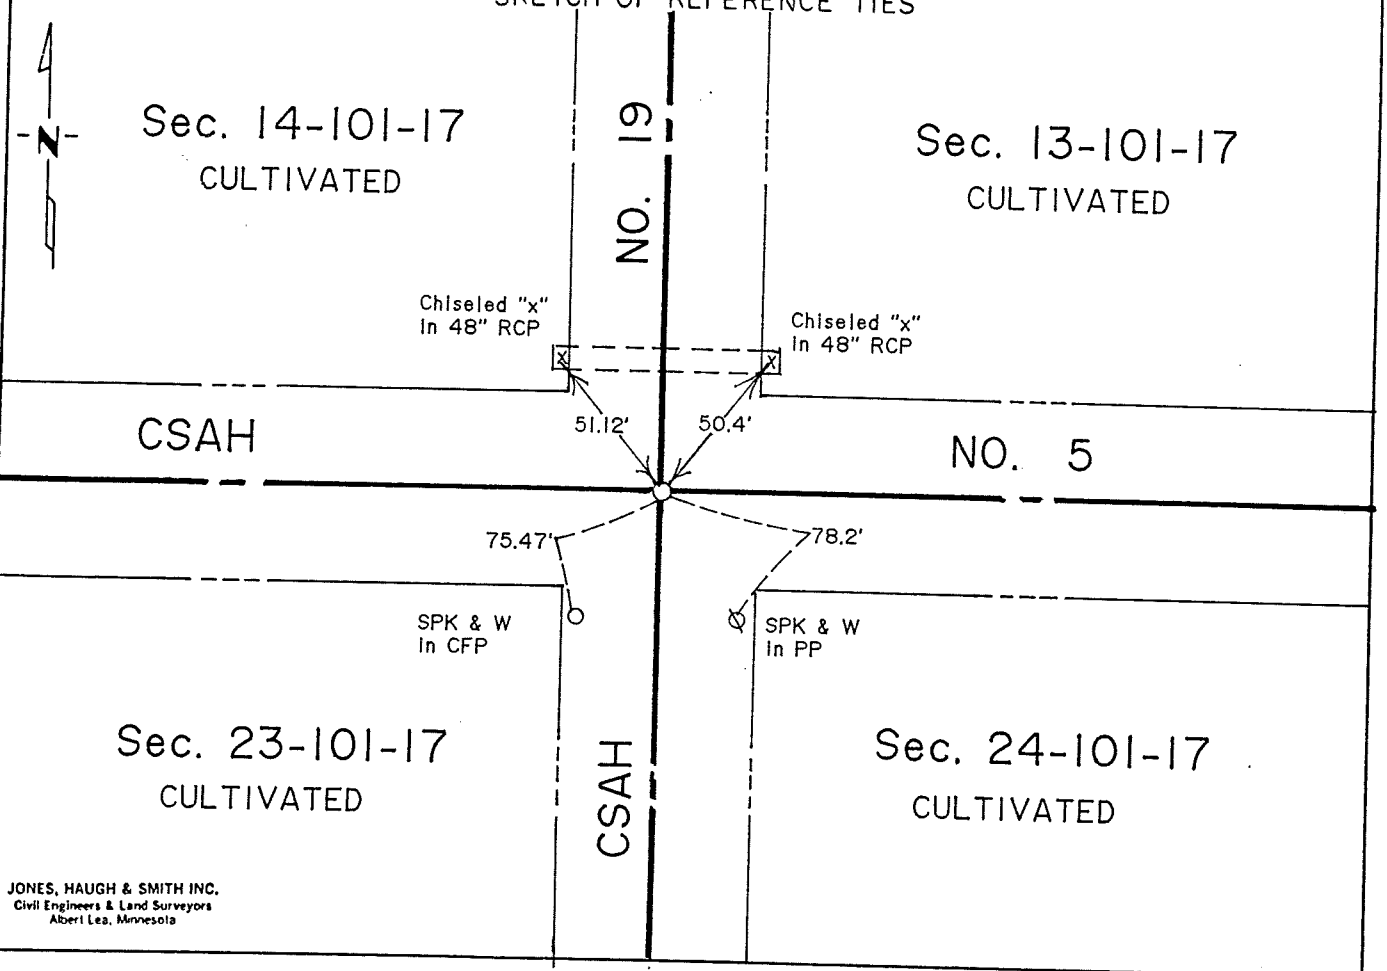

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-16-91 (DATE)

Registration No. 13867

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 24-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1887 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

Book "A" in the Mower County Engineering Office shows the corner located. The following ties were taken:

22.6' SW to end culv.
26.5' NE to end culv.
62.6' SE to 3rd F.P.E.
47.0' NE to T.P.

1967 Book "A" notes indicate a 1/2" diameter found on the centerline of north-south road. The following ties were taken:

50.6' NW to PP
62.8' NE to PP

1991 Jones, Haugh & Smith Inc. crew, under the direction of John H. Schulte, dug with the Mower County backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-619-14. Excavated a 6' x 10' x 6' deep hole and uncovered a cast iron monument 1.5' deep. Continued digging and found huge amounts of 4' square x 12' concrete. The concrete appears to be remains of old bridge deck. Accepted cast iron monument found and reset at the same location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 25, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a cast iron monument 1.0' deep over a 6"ø concrete monument in a clay tile with a 5/8"Ø iron cast in center and a old wood stake on North side.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a cast iron monument on surface over concrete monument found.

SKETCH OF REFERENCE TIES

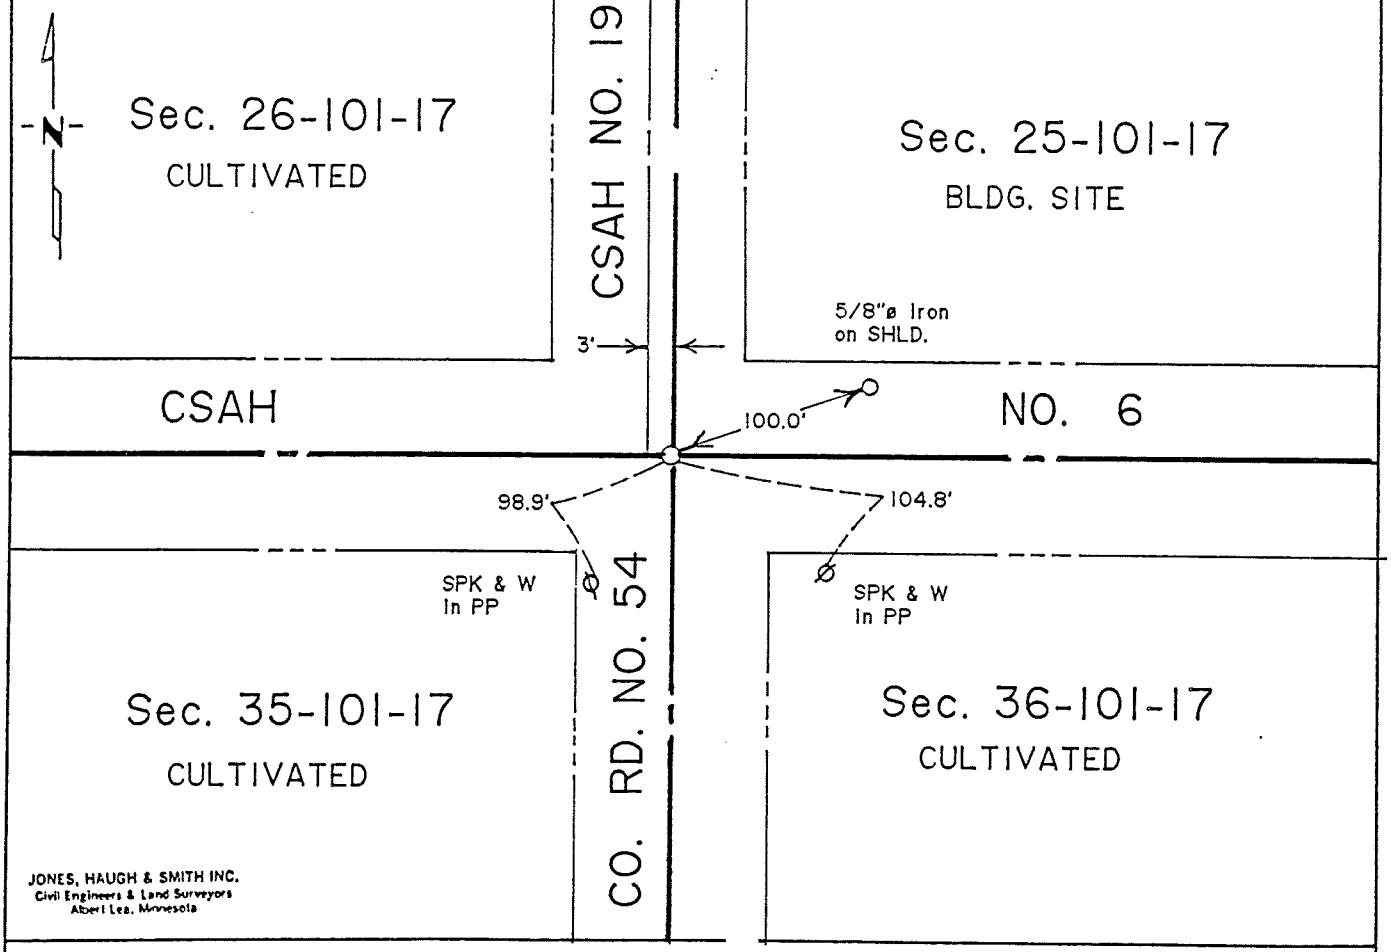

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 25-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1888 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1930 Book "A" in the Mower County Engineers Office show a government post inplace. The following ties were recorded:
50' NW to steel rod
50' SW to steel rod
50' NE to steel rod
50' SE to steel rod

Book "A" shows a concrete monument inplace. The following ties were recorded:
106.6' NW to PP
108.2' SW to PP
106.4' SE to PP
107.4' NE to 12" Pine

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of N-S-E-W roads for bituminous overlay project SAP 50-619-14. Excavated a 4' x 8' x 4' deep hole and uncovered a cast iron monument 1.0' deep. Continued digging and found a 6" diameter concrete monument in a clay tile with a 5/8" diameter iron cast in the center 4.0' below the road surface in virgin soil with an old wood stake on the north side of the monument. Left the monument as found and placed a cast iron monument on the road surface over the concrete monument found.

The monument placed fits occupation lines is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 25, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a 12"sq.x24" long limestone in virgin soil 2'± of midpoint and 2'± of a straight line.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a 5/8"ø iron on West side of stone, set a cast iron monument over stone on road surface.

SKETCH OF REFERENCE TIES

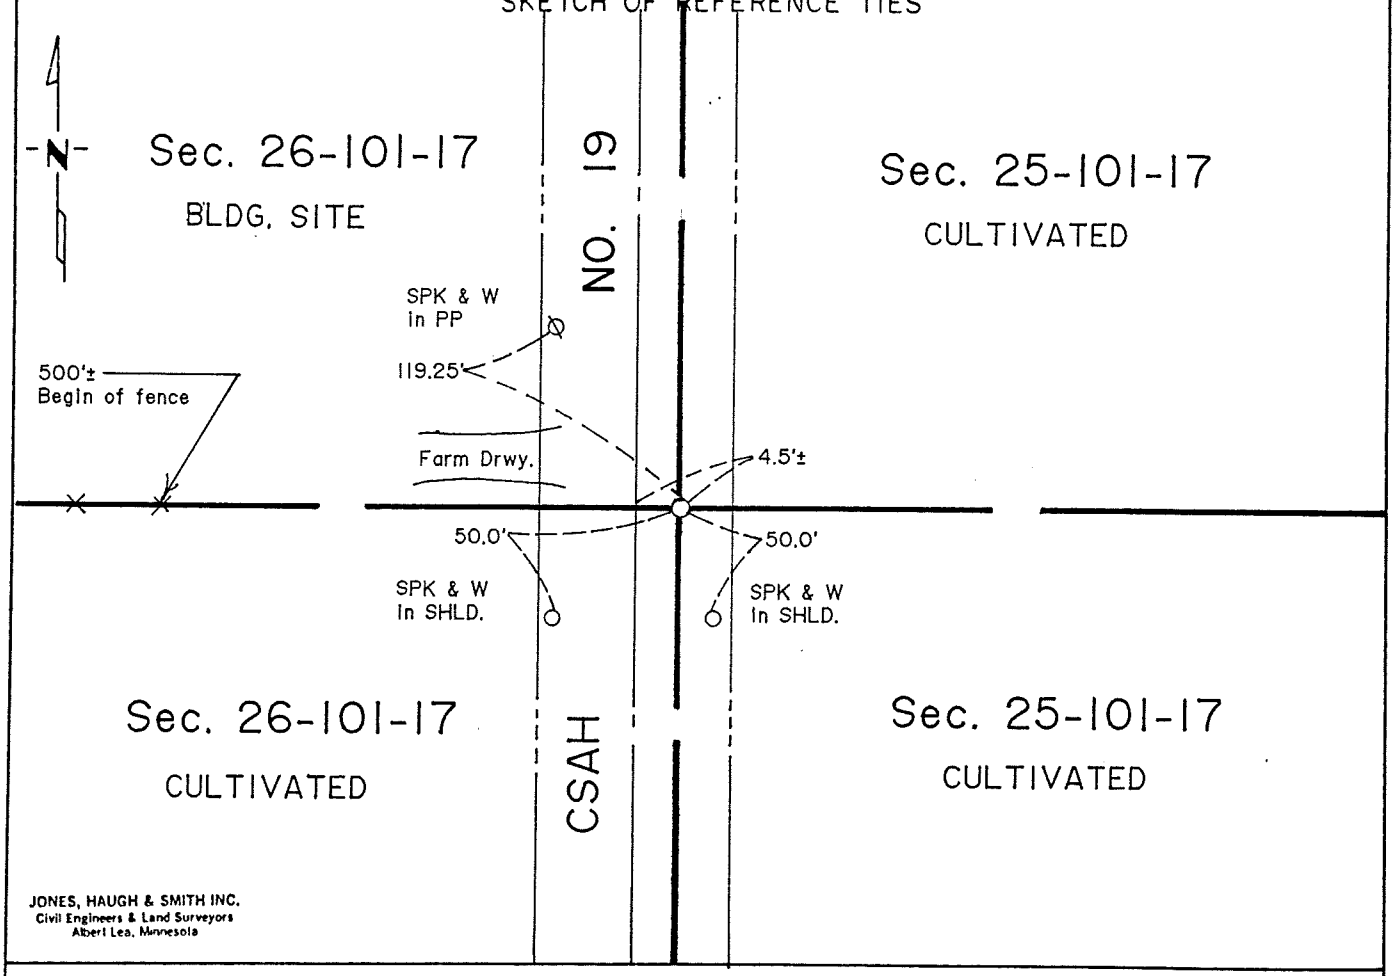

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 5-16-91
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 25-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1888 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe at midpoint on a straight line between Section corners for bituminous overlay project SAP 50-619-14. Excavated a 10' x 10' x 4' deep hole beginning 7' more or less, east of centerline on a straight line digging west towards the centerline. Uncovered a 12" square x 14" long limestone in virgin soil within 2' more or less, of midpoint and 2' more or less of straight line. Placed a 5/8" diameter iron on the west side of the stone and a cast iron monument on the road surface over the stone found.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. P. 41, "J" P. 71, "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 26, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-89 (DATE) found a 8" x 18" POINTED FIELD STONE IN VIRGIN SOIL.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-29-89 (DATE) placed a 5/8"Ø IRON ON WEST SIDE OF STONE, SET 5/8" Ø IRON OVER STONE ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

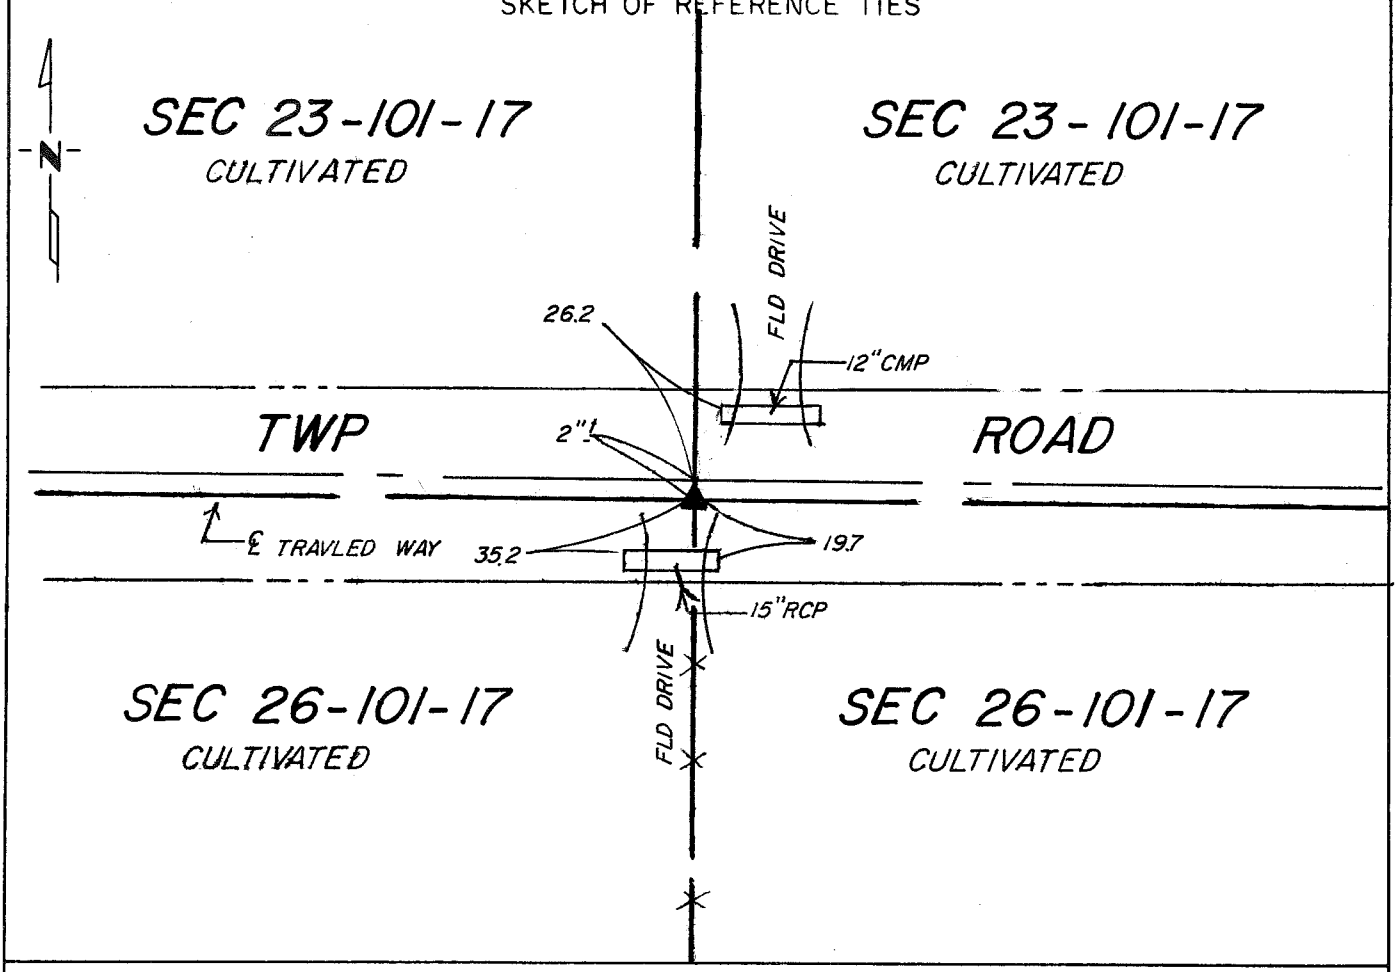

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-22-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 26-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the United States General Land Office in 1853. The government notes show this corner was marked with a charred stake set together with a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

No information was obtained to support evidence of the public land survey corner or a perpetuation thereof.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug on the centerline of E-W roads in line with fence south and uncovered an 8"x18" pointed field stone 3' below road surface in virgin soil. Placed a 5/8" diameter iron on west side of field stone, and a 5/8" diameter iron capped RLS 13807 over stone on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

p. 41, "H"
Index No. p. 71, "O"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-89 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-29-89 (DATE) placed a 5/8" Ø X 16" IRON CAPPED RLS 13807

SKETCH OF REFERENCE TIES

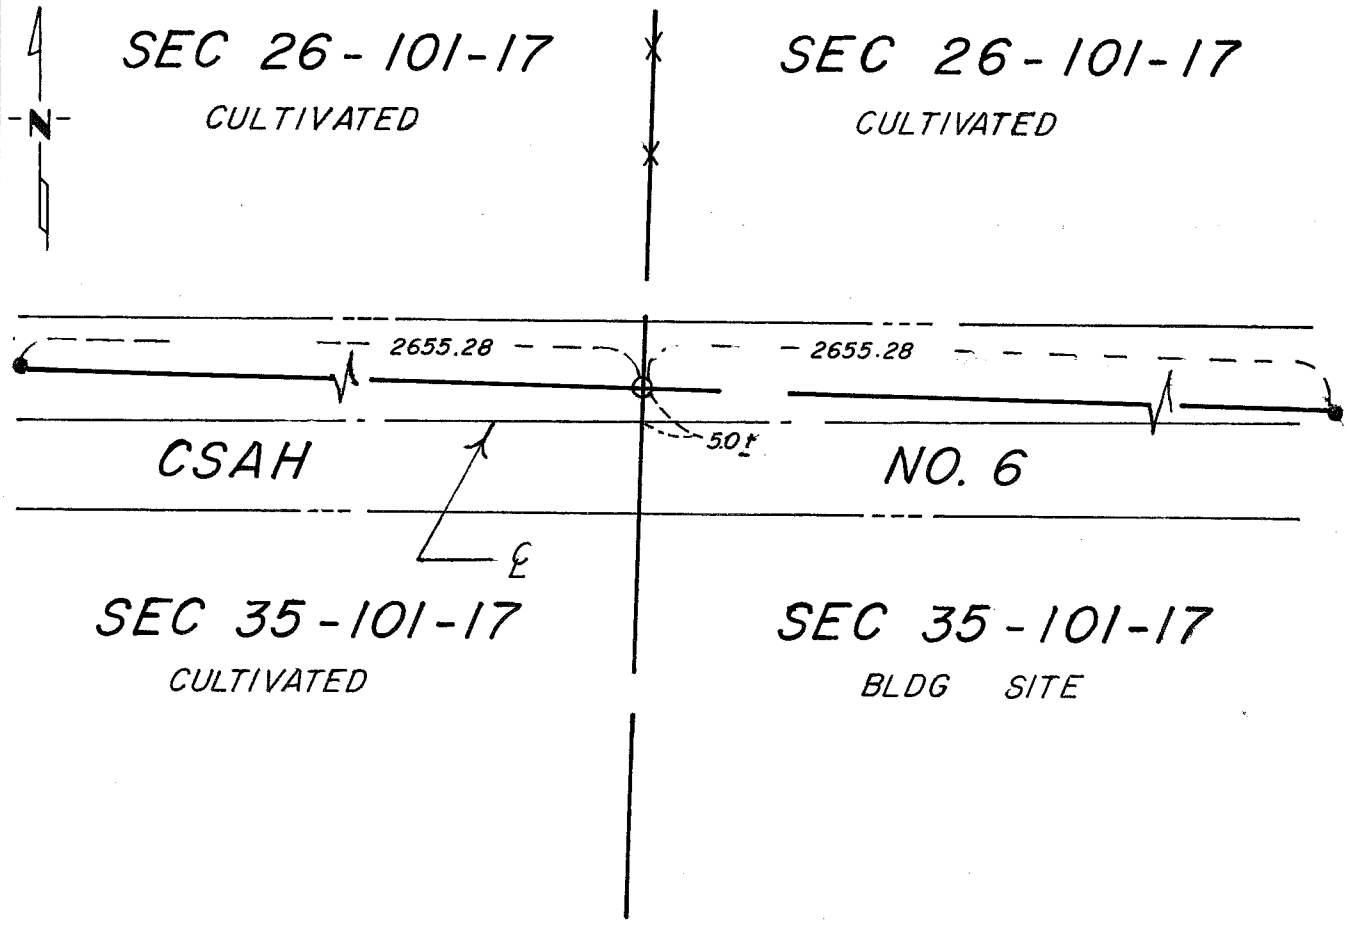

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-22-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 26-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the United States General Land Office in 1853. The government notes show this corner was marked with a charred stake together with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows position of corner to be 5'+ north of centerline of roads, but no indication of monument occupying 1/4 corner.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug a 25"x 4'x 5' deep hole and found no further evidence of public land survey corner or a perpetuation thereof.

Therefore established the position of corner using lost method & set a capped 5/8" diameter iron RLS 13807 at the midpoint on a straight line between the southeast & southwest section corners.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

P.41, "I"
Index No. p.71, "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 26, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-29-89 (DATE) found a 2 1/2" DIA. DECAYED WOOD POST.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-29-89 (DATE) placed a 5/8" Ø X 16" IRON CAPPED RLS 13807 OVER POST.

SKETCH OF REFERENCE TIES

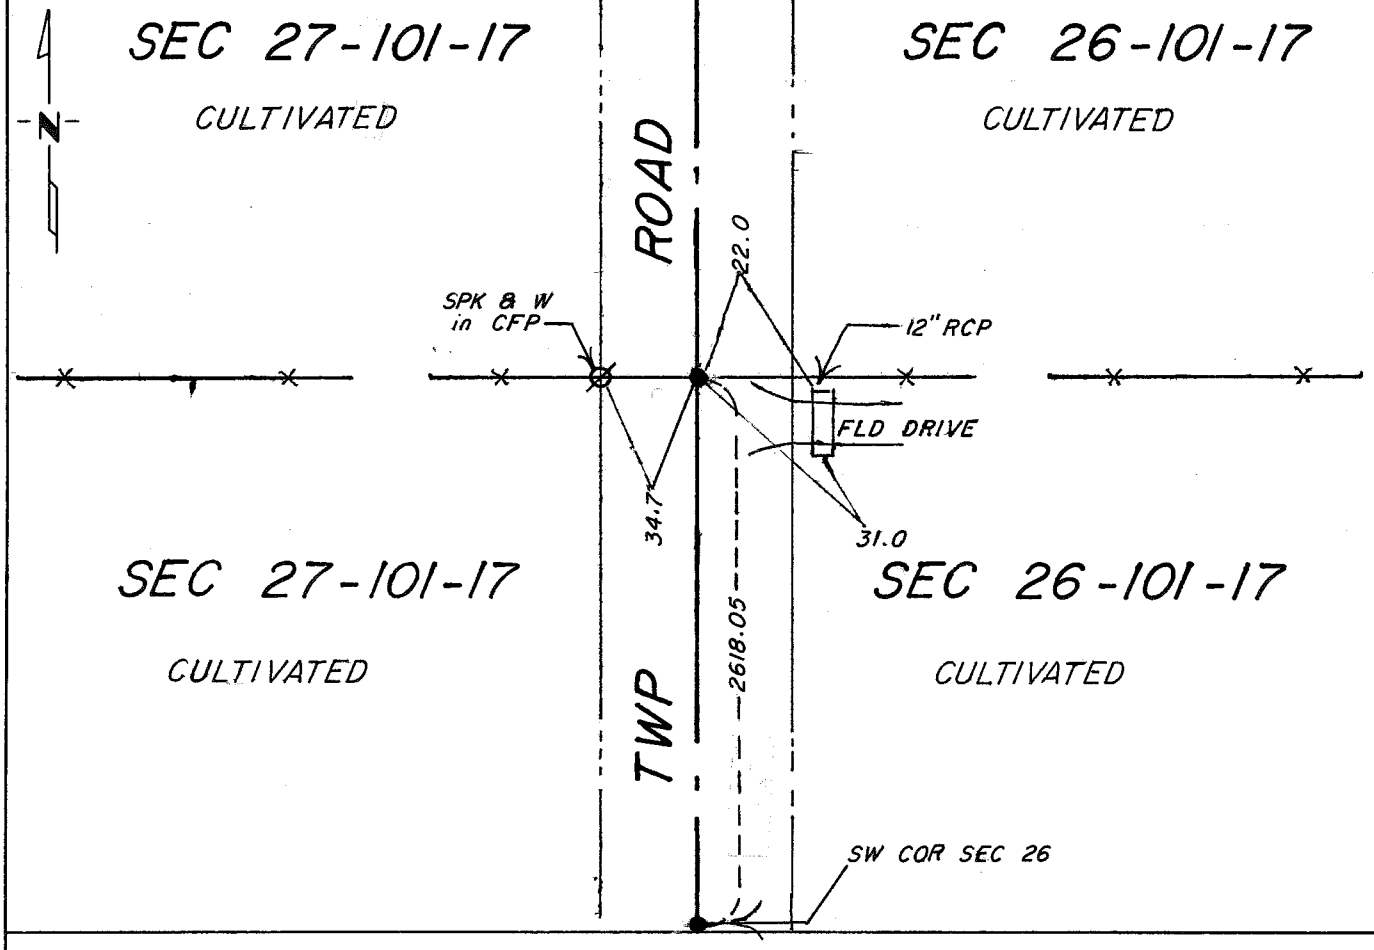

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 1-3-90 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 26-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the United States General Land Office in 1853. The government notes show this corner was marked with a charred stake and a mound of earth with trenches.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

No information was obtained to support evidence of the public land survey corner or a perpetuation thereof.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug on the centerline N-S road in line with fence E-W and uncovered a 2 1/2" diameter decayed wood post 2' below road surface in virgin soil. Placed a 5/8" diameter x 16" iron capped RLS 13807 over wood post on road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of the public land survey corner or a perpetuation of.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

P41, "B"

Index No. P71, "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 26, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 8-29-89 (DATE) found a 1/2" ϕ IRON CAST IN CONCRETE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 8-29-89 (DATE) placed a 5/8" ϕ x 16" IRON OVER CONCRETE MONUMENT

SKETCH OF REFERENCE TIES

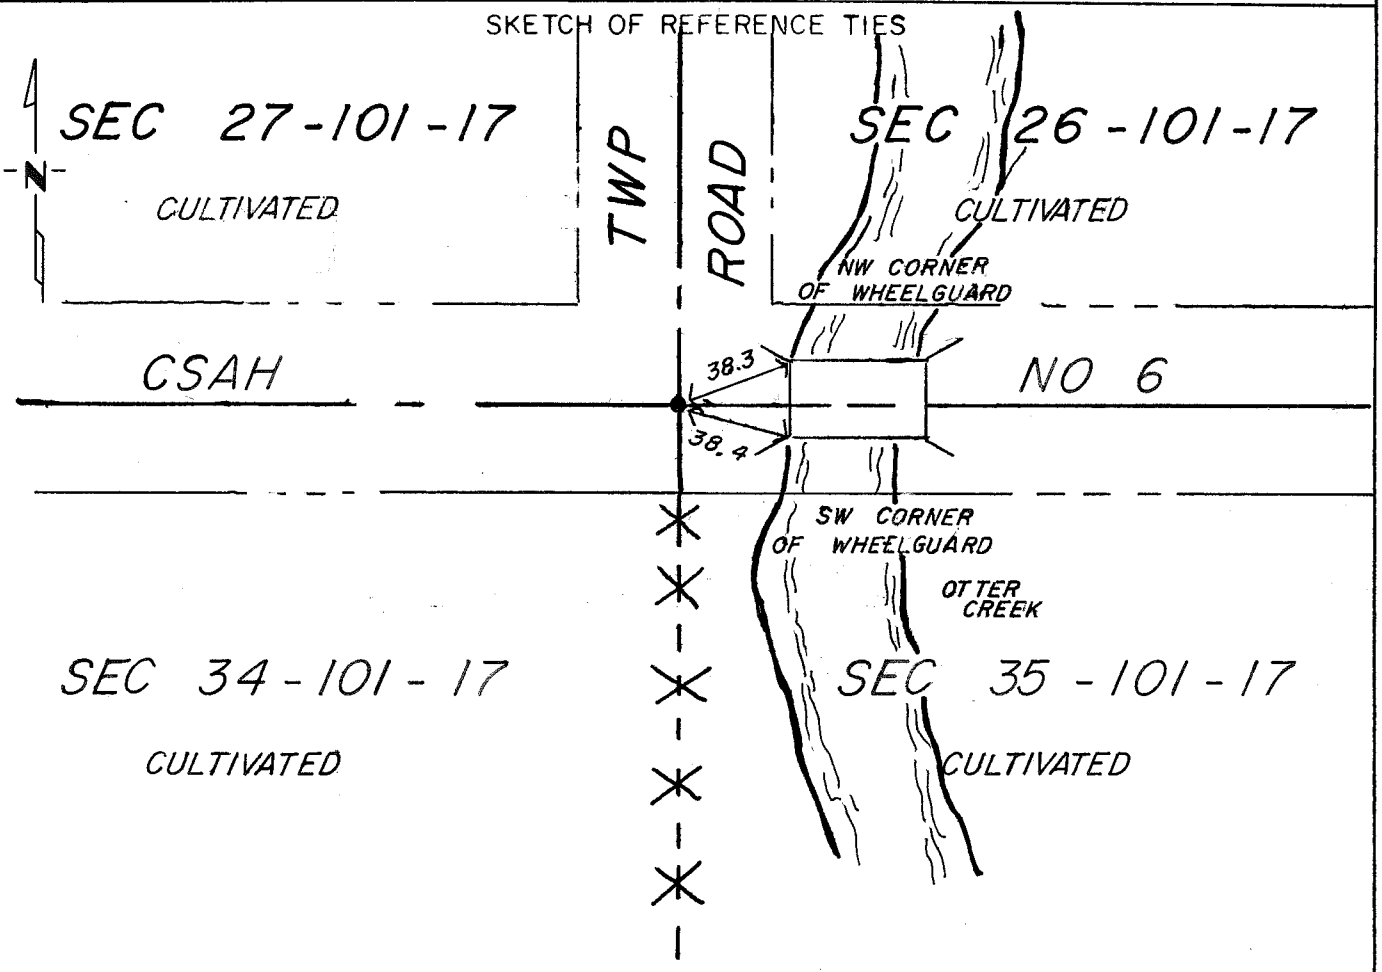

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-21-89 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW 1/4 corner Section 26-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the United States General Land Office in 1853. The government notes show this corner was marked with a charred stake, together with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Records Office

1930+ Mower County grading plan shows a concrete monument was found and ties were taken.

1989 Jones, Haugh & Smith Inc. personnel together with the Mower County backhoe operator dug a 6'x 6'x 3' deep hole on the centerline centerline of E-W-N roads and uncovered a 1/2" diameter iron cast in a 6" diameter concrete monument 2' below road surface. Placed a 5/8" diameter x 16" iron capped RLS 13807 over the concrete monument.

The monument found fits occupation and road centerlines within the section and agrees with past records from the Mower County Highway Department and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 27, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-21-91 (DATE) found no evidence of PLS corner.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-21-91 (DATE) placed a cast iron monument on ℄ of N-S road and fence line East. on straight line between NW corner & SW corner of Sec. 27.

SKETCH OF REFERENCE TIES

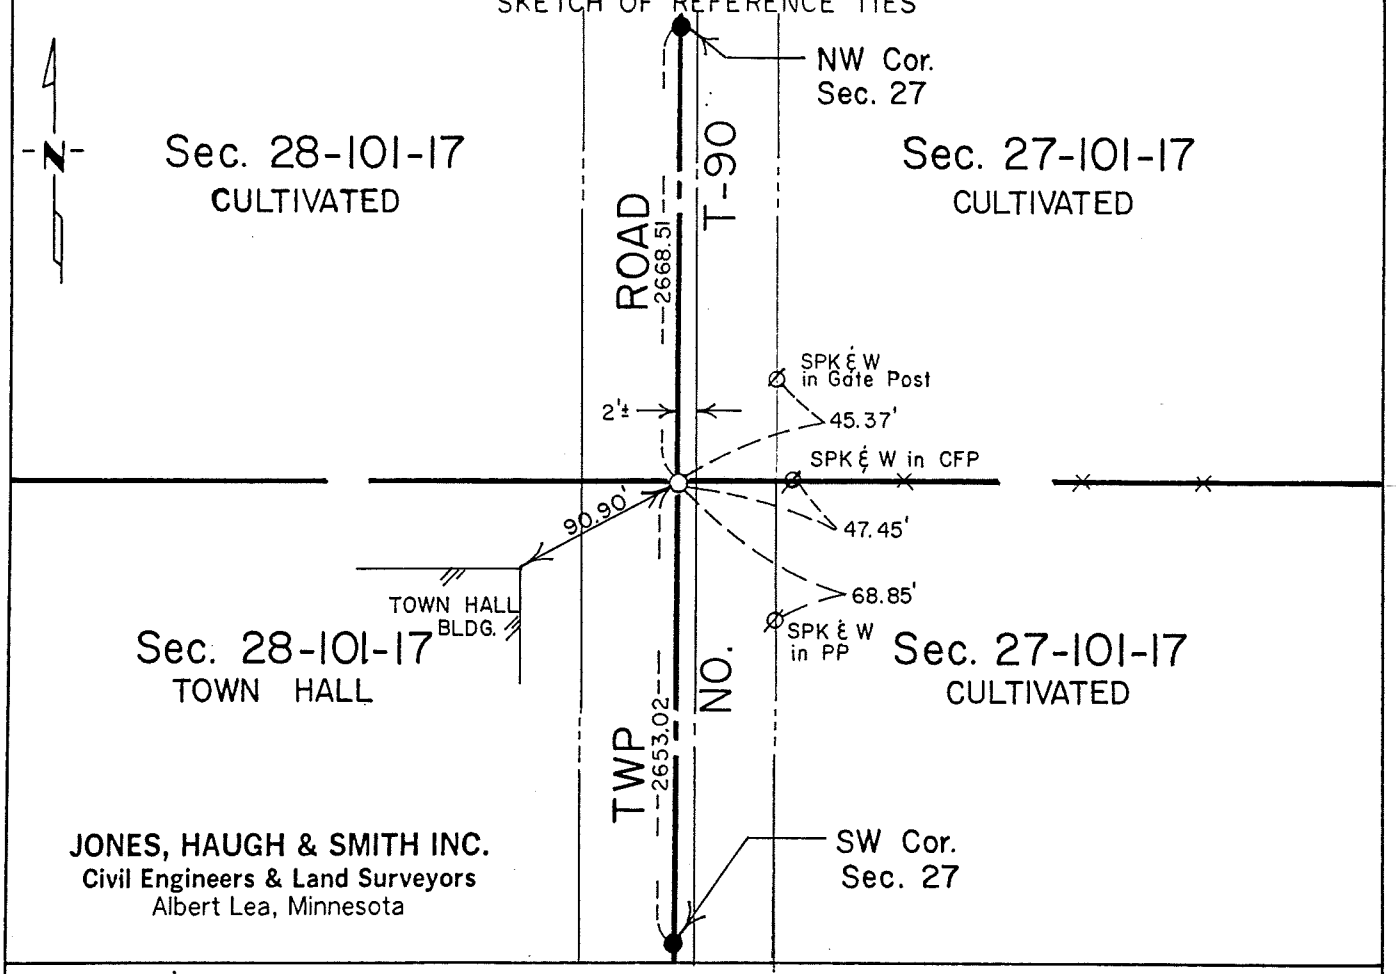

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-8-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 27-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1853. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe on centerline of north-south road in line with fence for Bridge Survey #2551. Dug a 5'x12'x3' deep hole and found no evidence of public land survey corner or a perpetuation thereof. Placed cast iron monument on straight line between section corners in line with fence east 0.5 feet below road surface.

The monument set fits occupation lines, fence lines and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 27, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

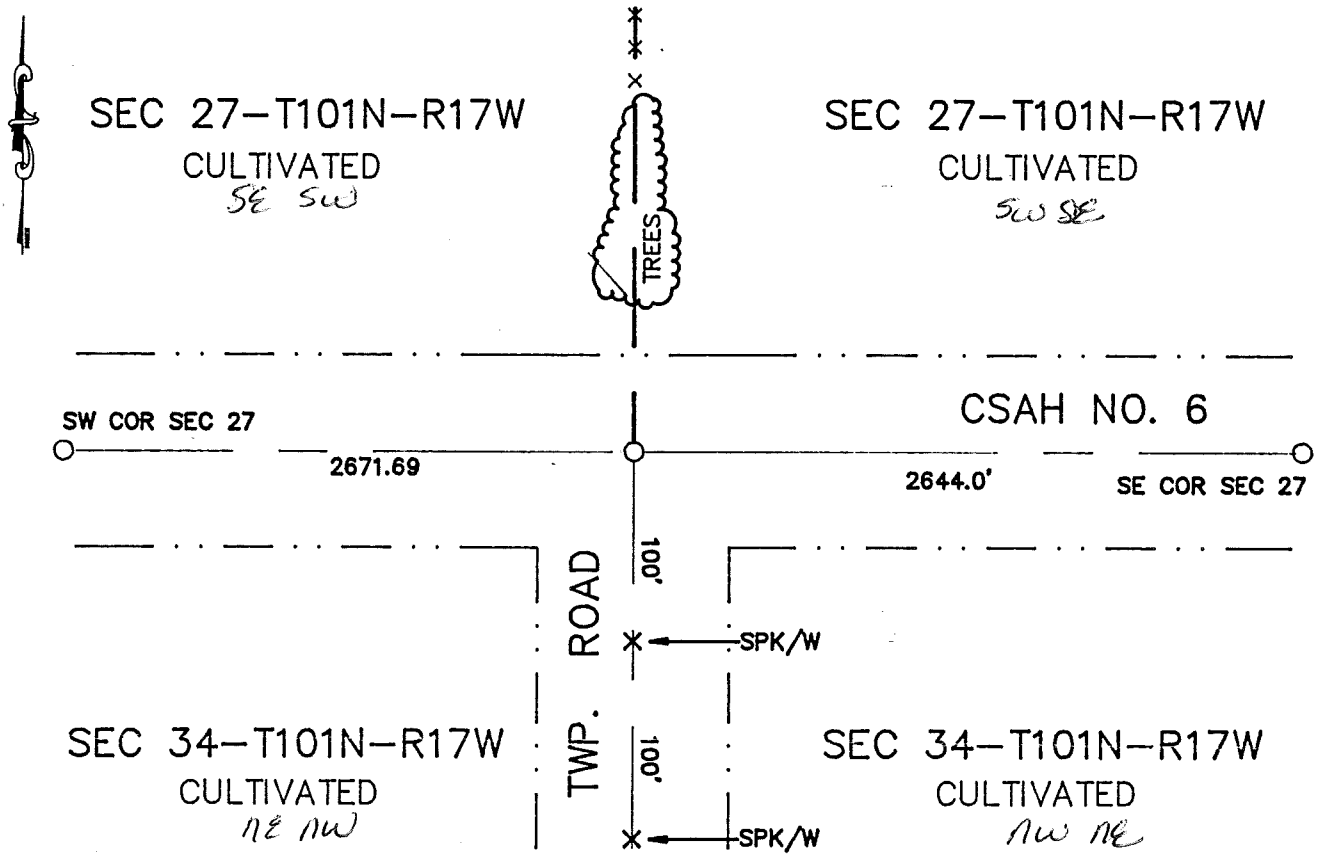

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 416965

M.H.D. FORM NO. 2105 BOOK 92 PAGE 132

Book 92 Misc Pg 132

S 1/4 Cor SEC 27-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection CSAH 6 and twp. road south, and in line with fence north. No evidence of the corner was found. A cast iron monument was set on a straight line between the SW and SE corners in line with the CL of the twp. road south.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 27, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a cone shaped axle hub over charred post over a large pointed field stone.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a cast iron monument over axle hub.

SKETCH OF REFERENCE TIES

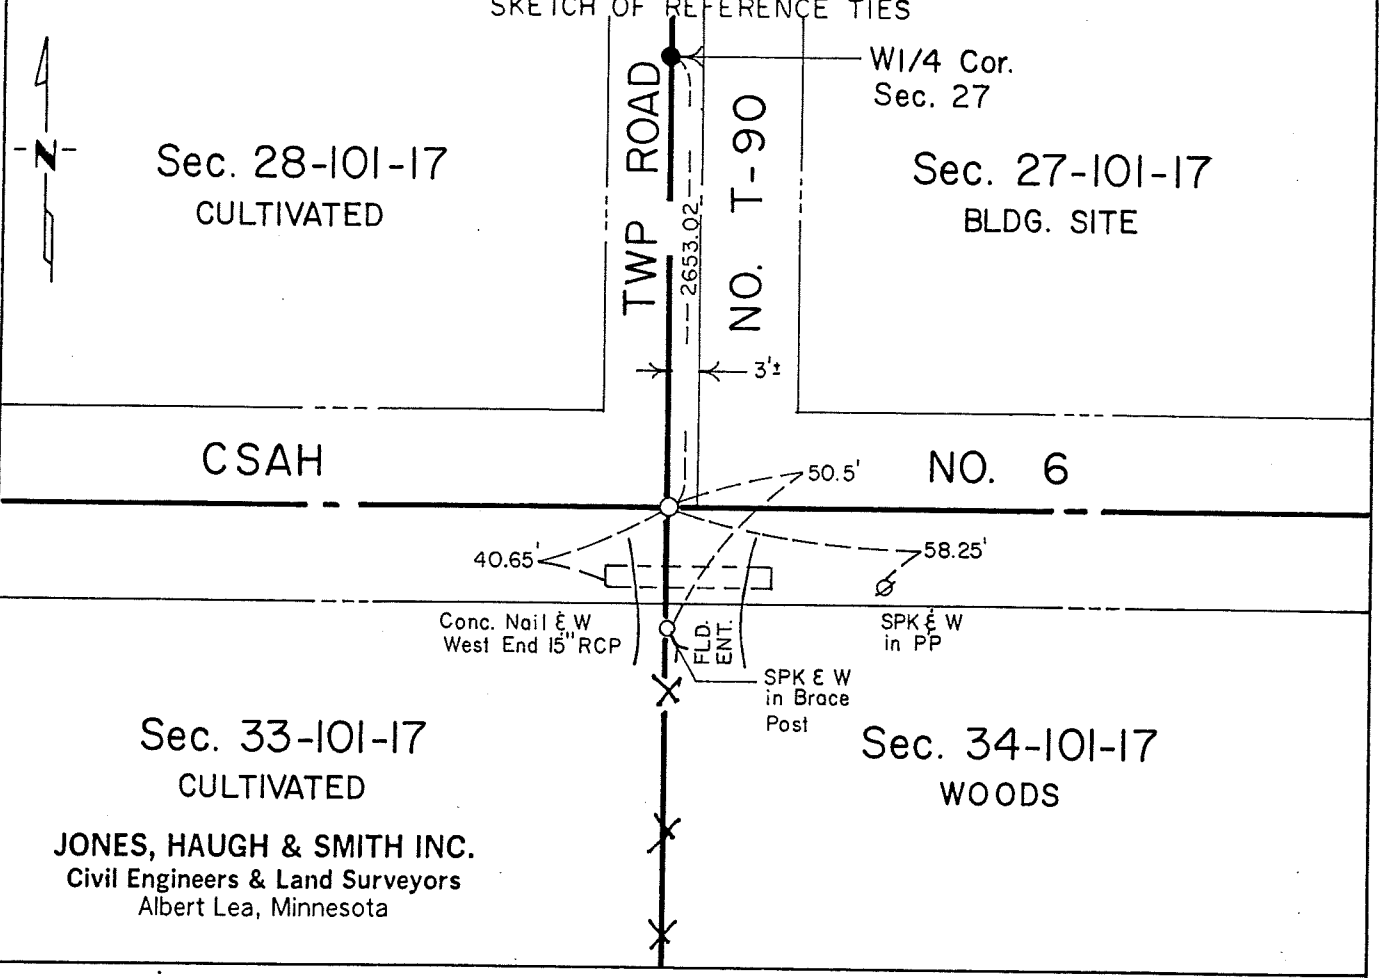

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-8-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 27-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show a charred stake was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1930 Recorded in Book "A" in the office of the Mower County Engineers shows a stone was inplace and ties taken.

1946 Grading plan on County State Aid Highway #6 shows a monument inplace and ties were taken.

1991 Jones, Haugh & Smith crew under the direction of John H. Schulte dug with the County backhoe on centerline centerline of the road for bridge project #2551. Dug a 4' x 10' x 5' deep hole and uncovered a cone shaped axle hub. Removed hub and found a 5" diameter charred wood post over a large pointed field stone in virgin soil 5' below the road surface. Left monuments as found and set cast iron monument over on road surface.

The monument found agrees with past records, fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 28, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

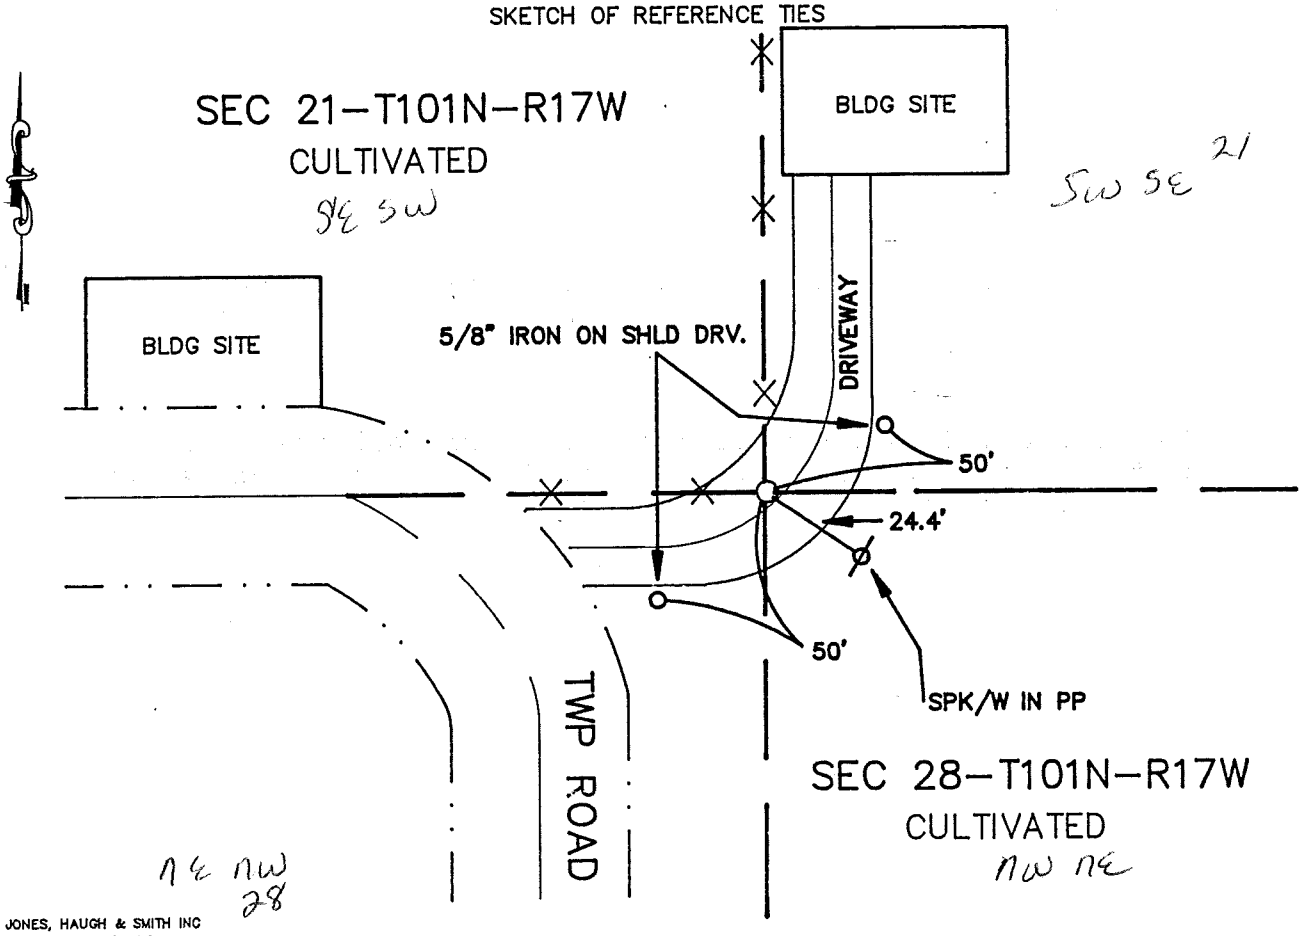

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 7-31-96
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p.M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles J. Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 446966

M.H.D. FORM NO. 2105 BOOK 92 PAGE 134 Book 92 Misc. Page 134

N 1/4 Cor SEC 28-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used metal locator in area of corner but found no evidence of the original monument. A cast iron monument was set in line with fence line north and in line with fence west. The corner is in the curve of the driveway two feet east of CL.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 28, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/25/1996 (DATE) found a 1/2" IRON IN CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/25/1996 (DATE) placed a 5/8" IRON OVER CONCRETE MONUMENT

SKETCH OF REFERENCE TIES

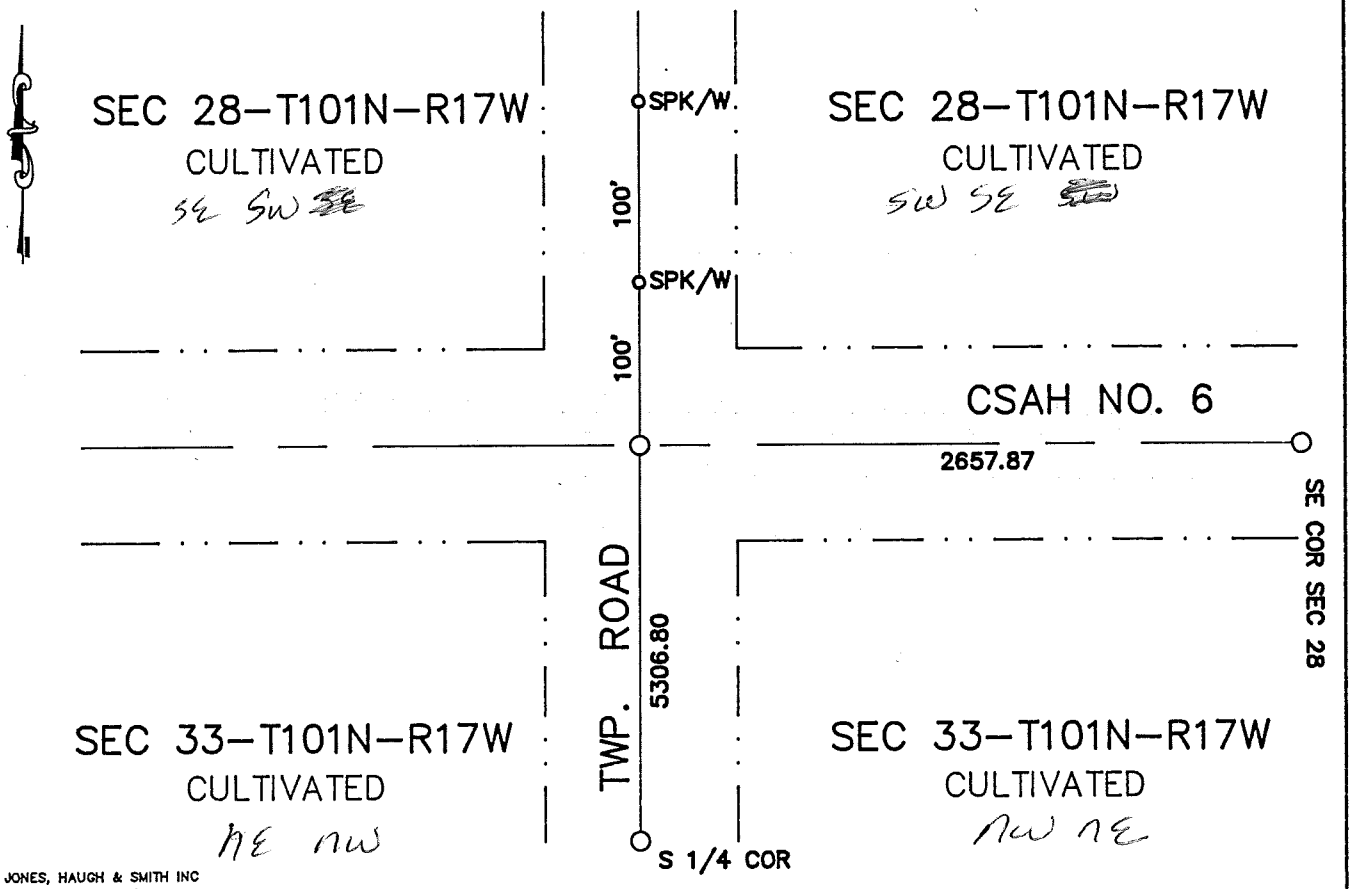

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 116967

M.H.D. FORM NO. 2105

BOOK 92 PAGE 136

Book 92 Misc Page 136

S 1/4 Cor SEC 28-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1996 Mower County road plans show a monument in place at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand to a depth of 2.5' and uncovered a 1/2" iron in concrete monument which agrees with Mower County records and road plans. A 5/8" iron was set over the concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 10-26-90 (DATE) found a stone 0.5' deep with an "X" scribed AOF 1854 at intersection of a fence line S-E.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10-26-90 (DATE) placed a 5/8"Ø iron capped (13807) on North side of stone found and 1.2' North of corner fence post.

SKETCH OF REFERENCE TIES

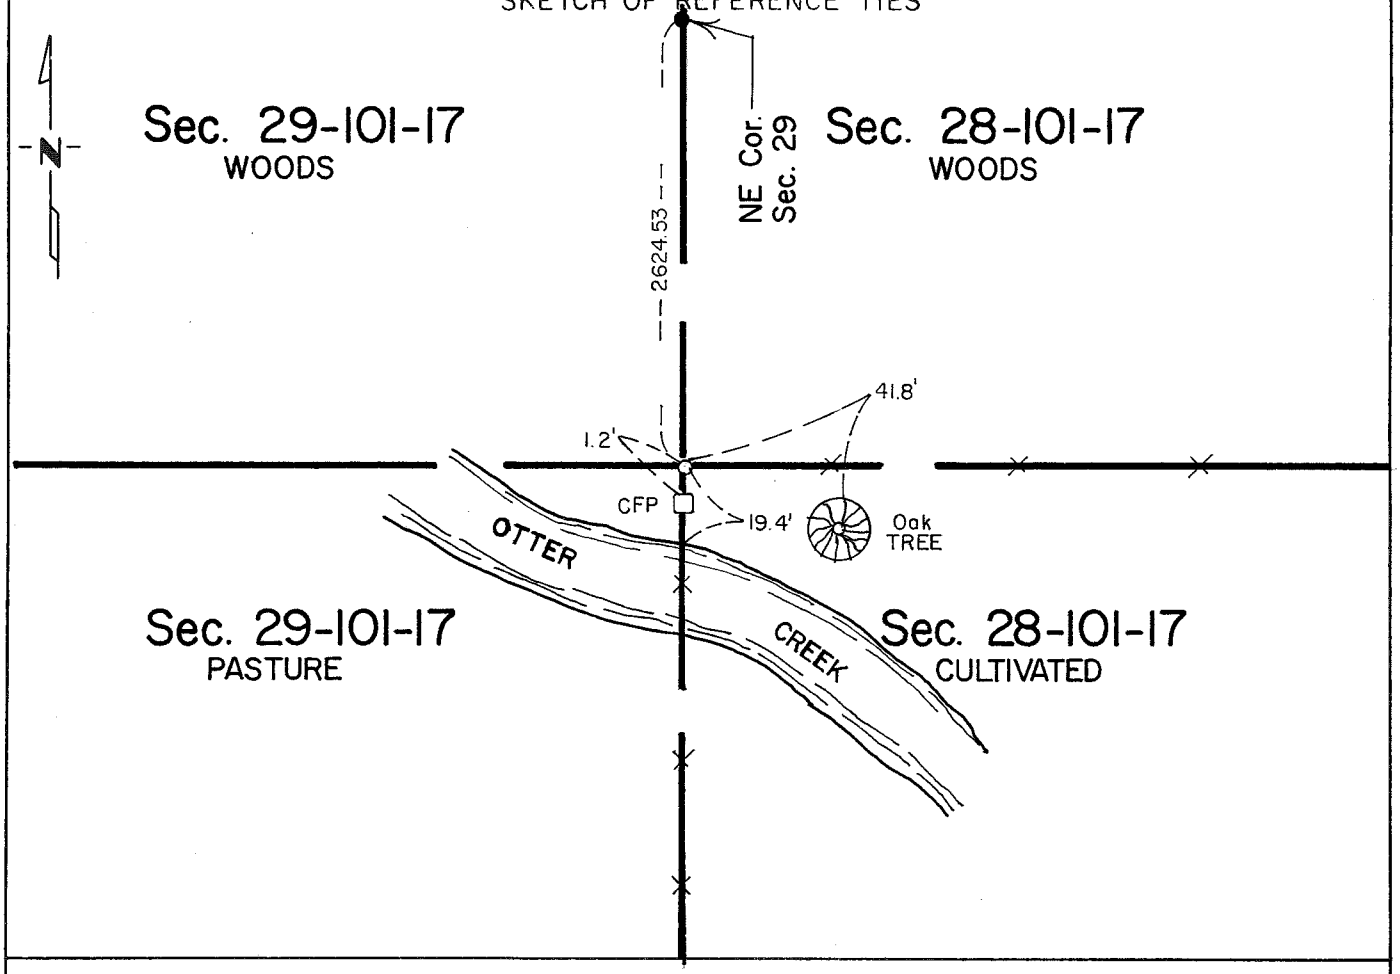

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 1-8-91
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and stone. The following ties were taken:

18" Burr Oak	N 12 W	40 links (26.40')
20" Black Oak	S 3 1/2 E	48 links (31.68')

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Records of C.E. Clausen, Mower County Surveyor, show a 14" x 10" x 4" stone was found scribed A.O.F. 1854 during a survey of the N 1/2 of Section 29 and chaining notes were shown.

1990 Jones, Haugh & Smith crew found a 14" x 10" x 4" stone marked with an "X" in the center and scribed AOF 1854 at intersection of south-east fence line and placed a 5/8" diameter iron (capped 13807) on north side of monument found.

Corner found fits occupation and past records of Clausen in 1879 and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-09-1990 (DATE) placed a 5/8" Ø IRON STAKE CAPPED RLS 13807

SKETCH OF REFERENCE TIES

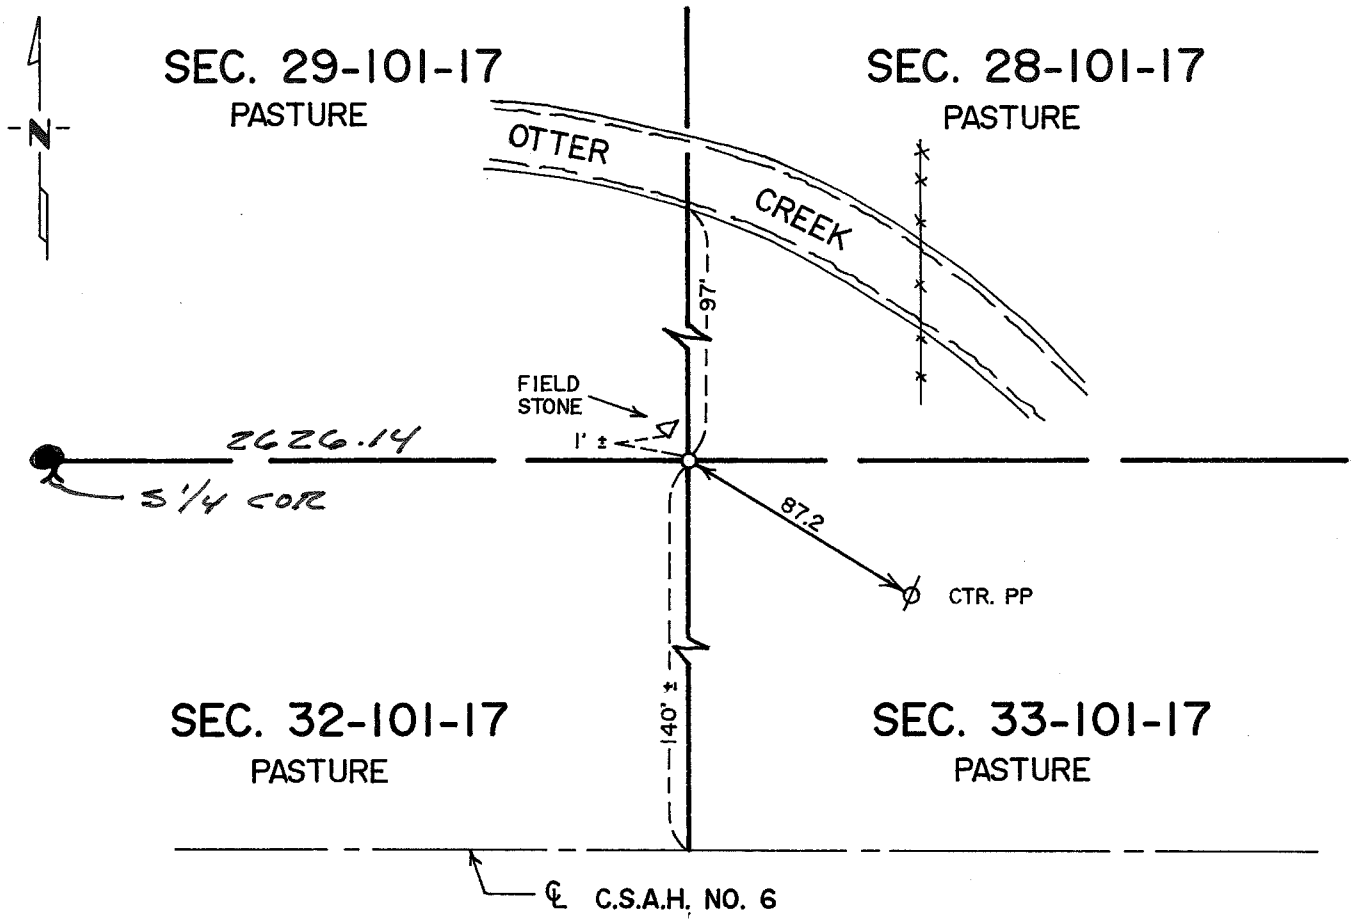

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 4-22-91 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

8" Elm	N 43° W	90 links (59.40 feet)
6" Elm	N 41 1/2° E	135 links (89.10 feet)
11" Burr Oak	S 32° E	632 links (417.12 feet)
5" Burr Oak	S 8° W	335 links (221.10 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Mower County "A" Book shows a government post in place. Chaining distances are also given.

1990 Jones, Haugh & Smith crew made a thorough search of an area by extending a line from the S 1/4 corner and southwest corner of Section 29 east a distance of 2626 feet from the S 1/4 corner and extending the fence line to the north and south. Found no evidence of the public land survey corner. Placed a 5/8" diameter iron RLS 13807 at this position and measured a distance of 2626.14 feet west to the S 1/4 corner versus 2626.14 (1879 Clausen).

The monument fits occupation lines within the section and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-26-1990 (DATE) found a POINTED FIELD STONE IN NEST OF SMALL STONES.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-26-1990 (DATE) placed a CAST IRON MONUMENT OVER FIELD STONE FOUND.

SKETCH OF REFERENCE TIES

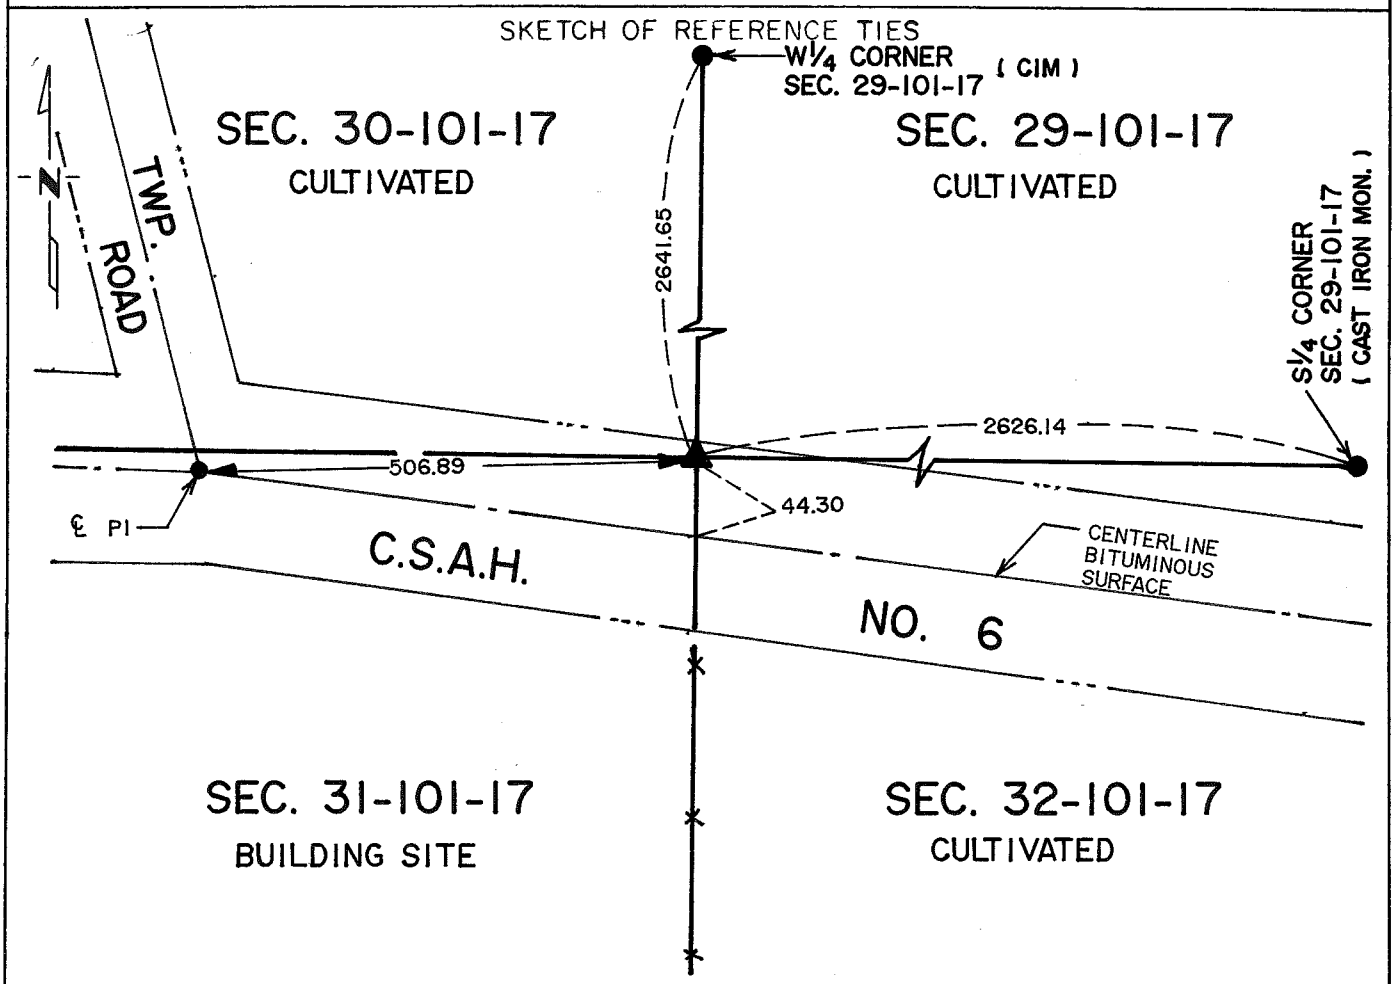

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-22-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

10" Black Oak	N 25° W	185 links (122.10 feet)
12" Burr Oak	N 88° E	92 links (60.72 feet)
10" Burr Oak	S 39° E	473 links (312.18 feet)
10" Black Oak	S 15° W	195 links (128.70 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show a stone in place and chaining distances are shown.

No date Mower County Book "A" shows section corner Sta 212+59 of Job 30-C found and the following ties were taken:
33.0' N of centerline Prop. Road
79.0' W to fence post
80.0' SW to tele. pole
11.0' SE to fence post

1928 County grading plan shows corner 33.0 feet north of centerline county road.

1951 New County Grading Plan shows the road was realigned and the centerline was relocated to 44.3' south of section corner.

1990 Jones, Haugh & Smith crew found a pointed field stone in nest of stones 44.3 feet north of the centerline of east-west CSAH 6 in line with fence line south and measured a distance of 2626.14 feet east to the south 1/4 corner of Section 29 versus 2626.80 feet (government); and measured a distance of 2641.65 feet north to west 1/4 corner of Section 29 versus 2640 feet (government) versus a distance of 2626.14 (C. 1879).

The monument found fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-22-1990 (DATE) found a POINTED FIELD STONE 4.0' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-22-1990 (DATE) placed a 5/8" Ø IRON STAKE (CAPPED RLS 13807) AT ROAD SURFACE OVER STONE FOUND.

SKETCH OF REFERENCE TIES

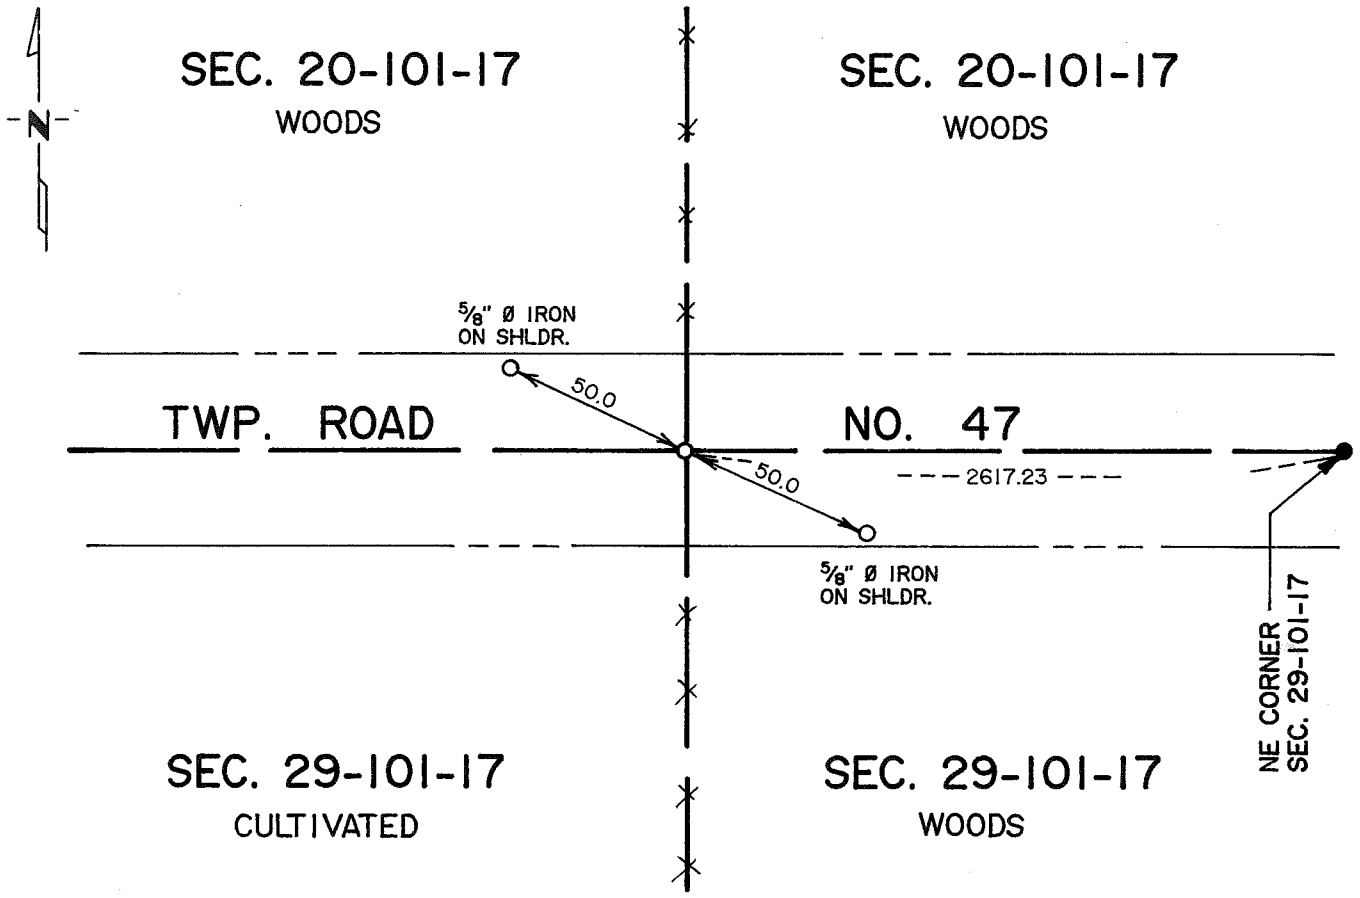

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 4-22-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

14" Black Oak	N 88° E	19 links (12.54 feet)
18" Black Oak	S 67° W	30 links (19.8 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show a government post in place and a chaining distance of 3958.0 to NE corner versus 3934.0 feet to the northwest corner.

1951 Mower County Book "A" shows an iron rod inplace and the following ties were taken:

41.0' N to end FP
84.0' S to spike in 12" Elm tree
67.5' SE to spike in 10" Elm tree
47.0' NE to spike in 24" Cottonwood tree

1990 Jones, Haugh & Smith crew along with the County backhoe dug at the intersection of fence lines north and south and the centerline of an east-west road, and found a pointed field stone 4.0 feet deep. Continued digging and found no further evidence of the public land survey corner. Placed a 5/8" iron (RLS 13807) over the stone and measured 2617.23 feet east to the northeast corner Section 29 versus 2612.28 feet (1879 Clausen) and measured 2594.63 feet west to the northwest corner of Section 29 versus 2596.44 feet (1879 Clausen).

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 29, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 10-22-1990 (DATE) found a ½"Ø X 12" IRON STAKE 0.5' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 10-22-1990 (DATE) placed a 5/8"Ø IRON STAKE AT ROAD SURFACE OVER MONUMENT FOUND.

SKETCH OF REFERENCE TIES

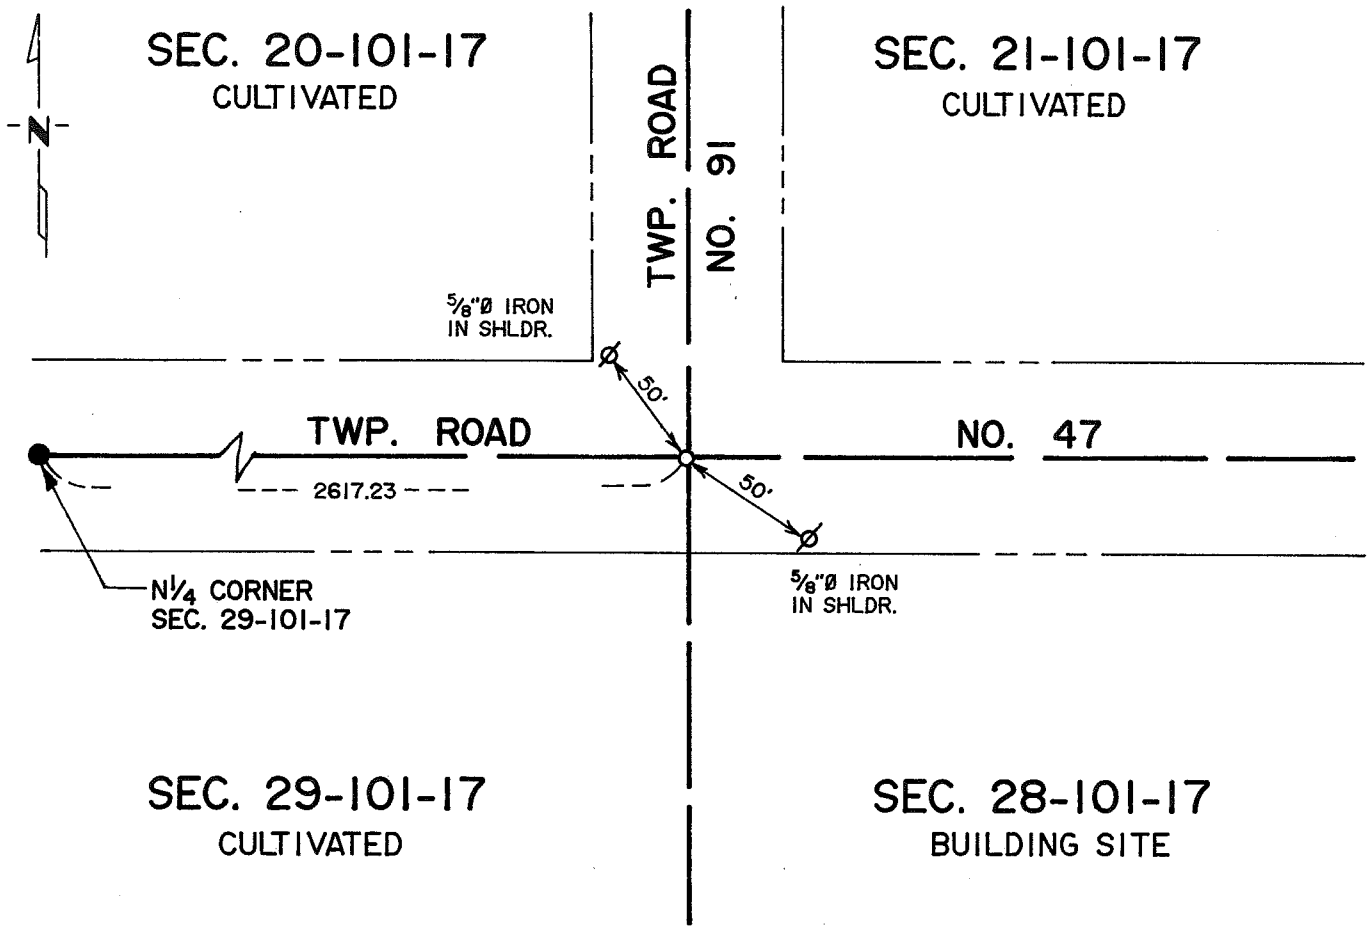

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-22-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec. 29-101-17

This corner was originally established by Deputy Surveyor Charles Phipps & Edward Fitzpatrick of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a wood post and the following ties were taken:

11" Aspen	N 55 1/2° W	39 links (23.76 feet)
12" Black Oak	N 62° E	32 links (21.12 feet)
12" Black Oak	S 70 1/2° E	9 links (5.94 feet)
8" Aspen	S 36° W	52 links (34.32 feet)

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorders Office

1879 Clausen's field notes show government post inplace.

1951 Mower County Book "A" shows corner found and the following ties were taken:
37.7' South to spike in 14" Elm
43.9' NE to tele. pole
41.8' NW to spike in 12" Elm
28.5' SE to tele. pole

1990 Jones, Haugh & Smith crew dug with the County backhoe and found a 1/2"x12" iron 0.5' at the centerlines of roads north and east-west. Continued digging and found no further evidence of original public land survey corner. Set (capped RLS 13807) 5/8" diameter iron stake over found iron and measured 2617.23 feet west to the north 1/4 corner of Section 29 versus 2612.28 (C. 1879).

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 29, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/22/1990 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

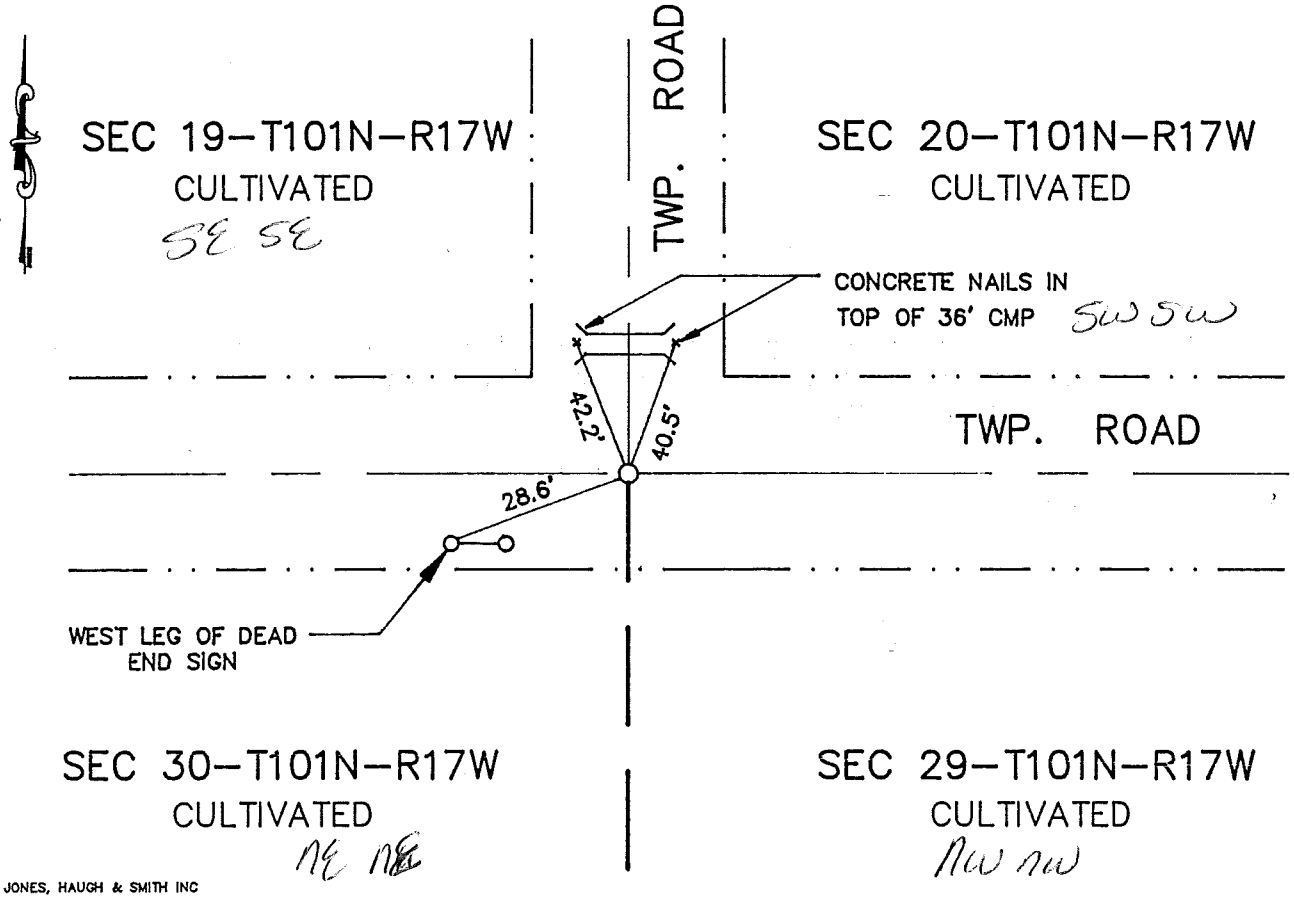

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 446968

Book 92 Misc Page 138

M.H.D. FORM NO. 2105

BOOK 92 PAGE 138

NW Cor SEC 29-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, excavated and found a cast iron monument at CL CL intersection of twp. roads. Found no further evidence of PLS corner. Therefore we accepted cast iron monument as best evidence of the original PLS corner and took ties.

1996 Jones Haugh and Smith found a cast iron monument in accordance with 1991 record.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER P.42 "Q"

EAST QUARTER Corner of Section 30, Township 101N, Range 17W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On _____ found _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 10-27-89 placed A CO. QUARTER COR. C.I.M. OVER 1/2" PIPE WITH CAP STAMPED RLS 11009

SKETCH OF REFERENCE TIES

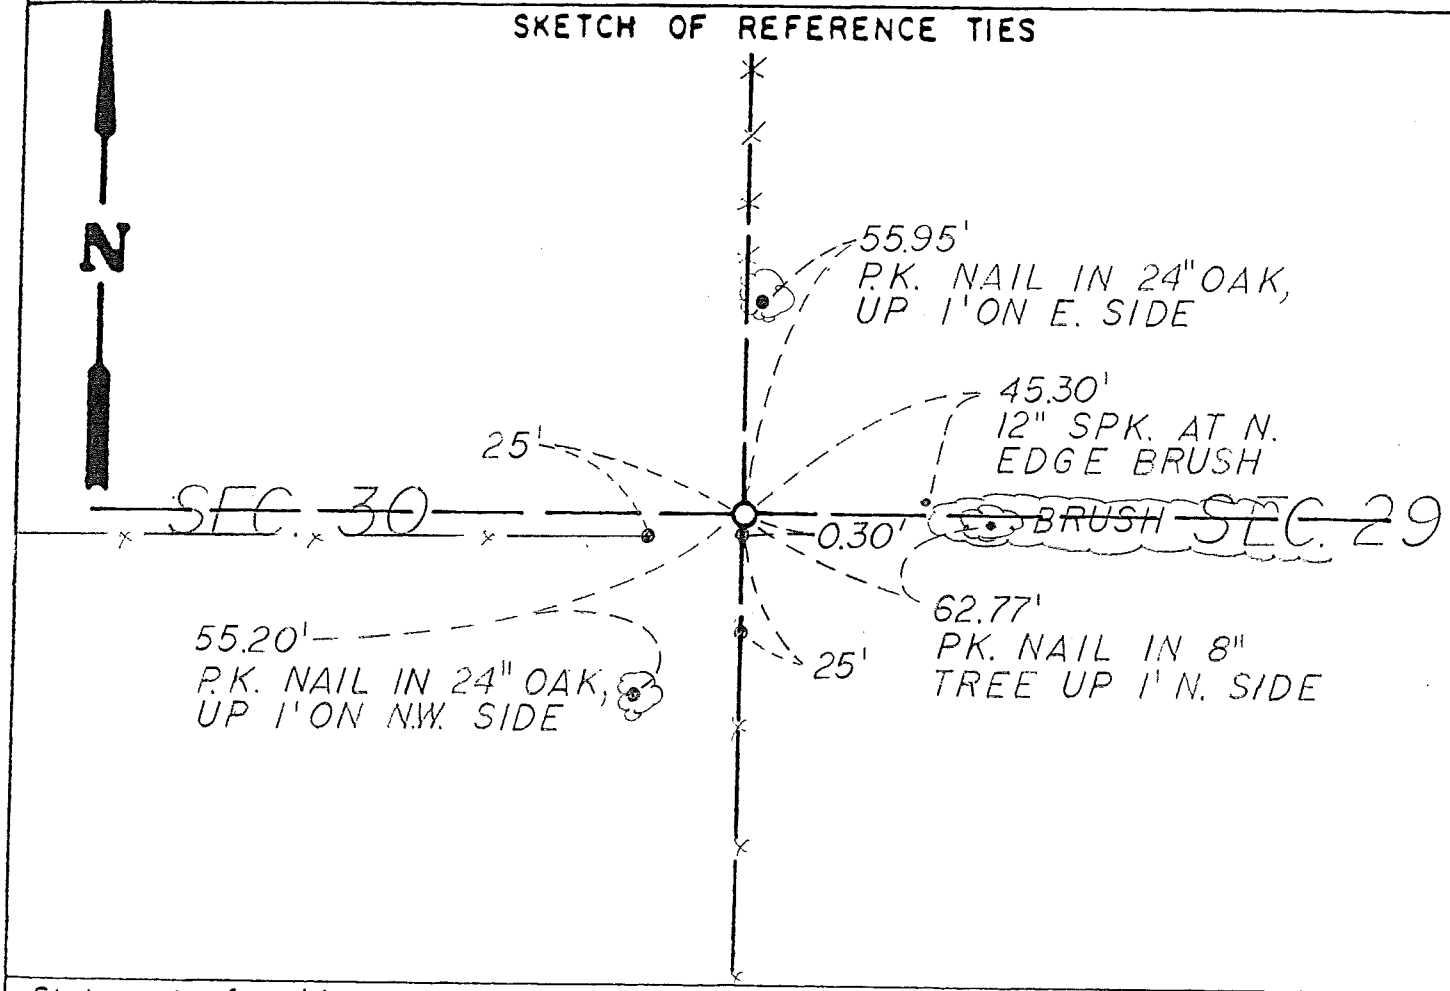

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers/Architects/Land Surveyors/Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19____.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 30, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

July, 1854 — Charles Phipps and Edward Fitzpatrick, Deputy Surveyors, set qr. sec. post and marked Bearing Trees - Lind 20 N 52 1/2 E 14 lks and W Oak 14 N 66 W 36 lks. during the original Public Land Survey.

1957 — Frank M. Brown, R.L.S. 4605, made a survey starting near the East Quarter Corner of Section 30. A distance of 21.67 feet was shown from the 1/4 Cor. North to the corner of the property he was surveying. A Distance of 64.03 was given to another corner north of the 1/4 cor.

Sept. 28, 1989 — Ronald J. Olson, RLS 11009, searched the area with a magnetic locator and found two 3/4 inch pipes 21.62 feet apart. An electronic survey of the monuments and the occupation lines was made.

An analysis of the record data gives no indication of the original monument perpetuation. The pipe set in 1957 appears to have been set from a 24 inch white Oak tree assumed to be a bearing tree. The location of the pipe did not agree with the other lines of occupation in the Section and is 50 feet South of Midway between Section Corners. The tree appears to be to small to be an original bearing tree. The corner was set at the occupied fence corner. This location agrees with the East-West Quarter Line occupation line in both Section 30 and Section 29. It also is within 4 feet of the 1/16 fence doubled over from the North. This location is accepted as marking the corner of the original Public Land Survey.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 30, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

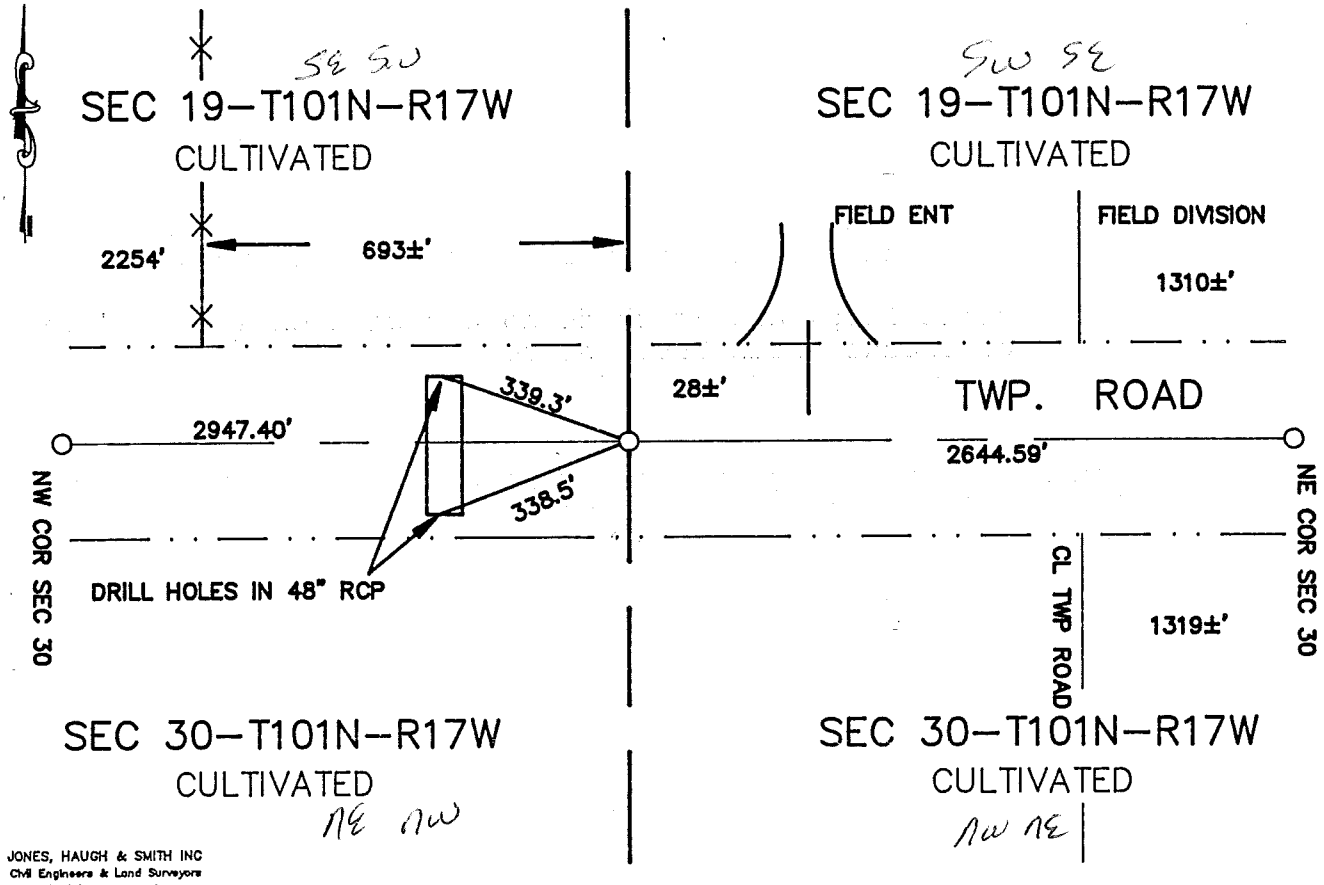

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 146969

M.H.D. FORM NO. 2105 BOOK 92 PAGE 140

Book 92 misc Page 140

N 1/4 Cor SEC 30-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W. Measured a distance of 2940' from the NW corner of section 30 and uncovered wire and old tin cans. Continued digging to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument using lost methods which agrees with existing field divisions, road CLs, and fence lines.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER p.42 "C"

NORTHEAST Corner of Section 30, Township 101 N, Range 17 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 9-28-89 found STAKE HOLE STAIN

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-28-89 placed CTY. C.I.M. OVER A 3/4 X 18 PIPE IN STAKE HOLE

SKETCH OF REFERENCE TIES

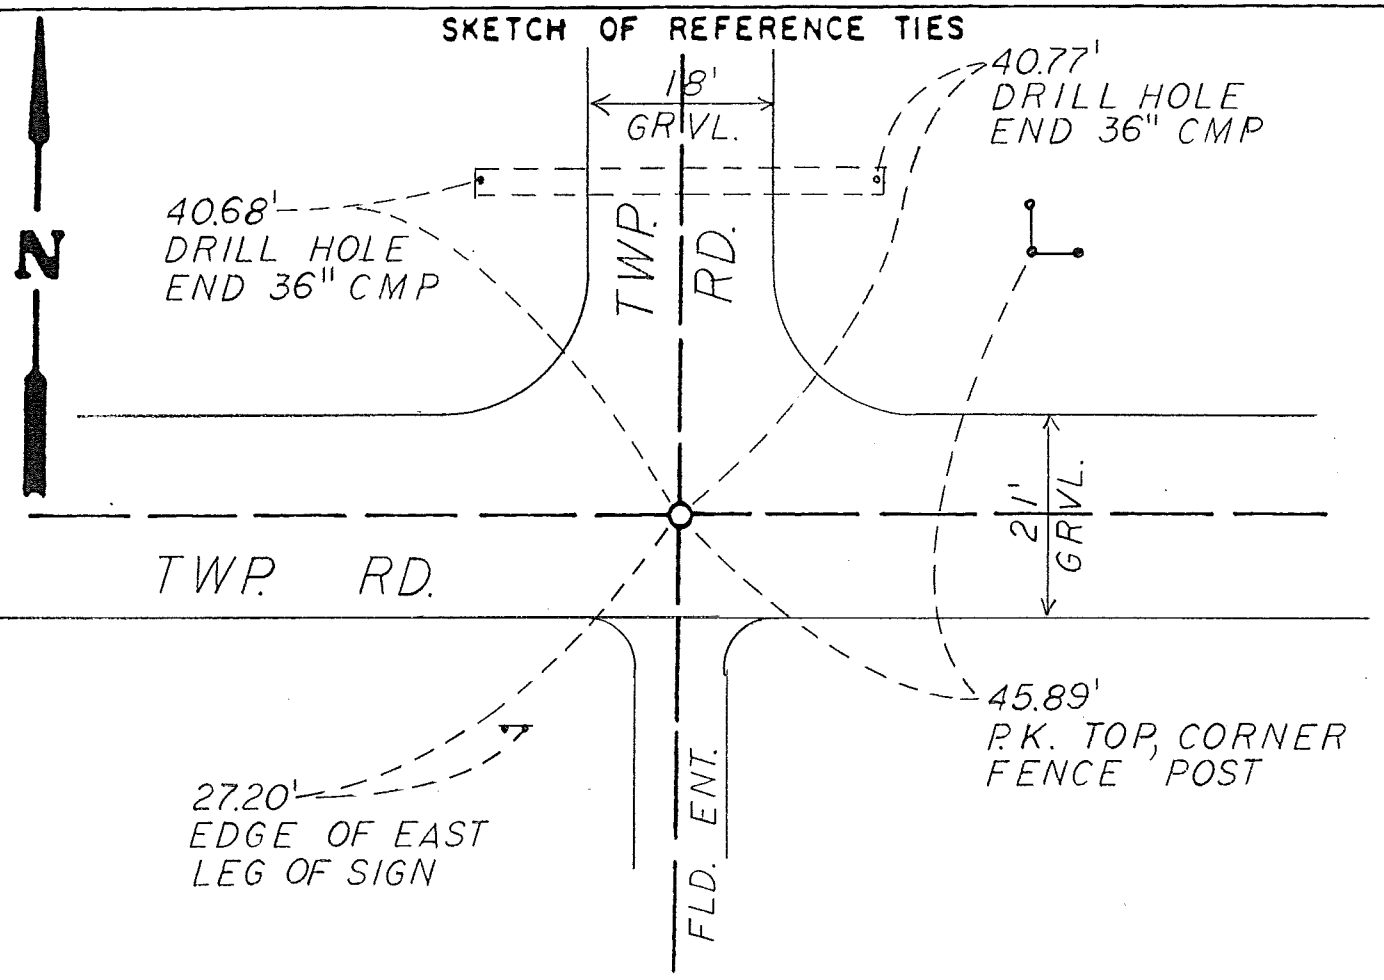

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHEAST CORNER SECTION 30, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

July, 1854	Charles Phipps and Edward Fitzpatrick, Deputy Surveyors, drove a charred stake, raised mound with trench as per instructions and planted a Locust Seed, NW, SW, NE and SE, during the original Public Land Survey.
1951	Mower County Engineer's Tie Book shows a 1/2" Iron Rod inplace with ties.
1985	Mower County Engineer's Tie Book shows ties to the Corner, being 3 feet south and 5 feet East of Centerline-Centerline of the Township Roads. No Monument was shown.
Sept. 28, 1989	Ronald J. Olson, RLS 11009, searched the area with a magnetic locator and excavated with a backhoe from 2 feet West to 6 feet East of the road centerline and from 1 foot North to 5 feet South from the centerline by 2.5 feet deep and found a 2 inch diameter by 1 foot high stake hole stain. The excavation was followed down to the pointed bottom of the stain. A 1/2 inch by 14 inch twisted steel rod under a 3/4 inch by 12 inch rebar was found 4 feet southeast of the stake hole.
	An analysis of the record data shows that the stake hole stain is evidence of the location of the original stake set in 1854. This location is accepted as the position of the original Public Land Survey Corner.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/16/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/16/1996 (DATE) placed a CONCRETE NAIL

SKETCH OF REFERENCE TIES

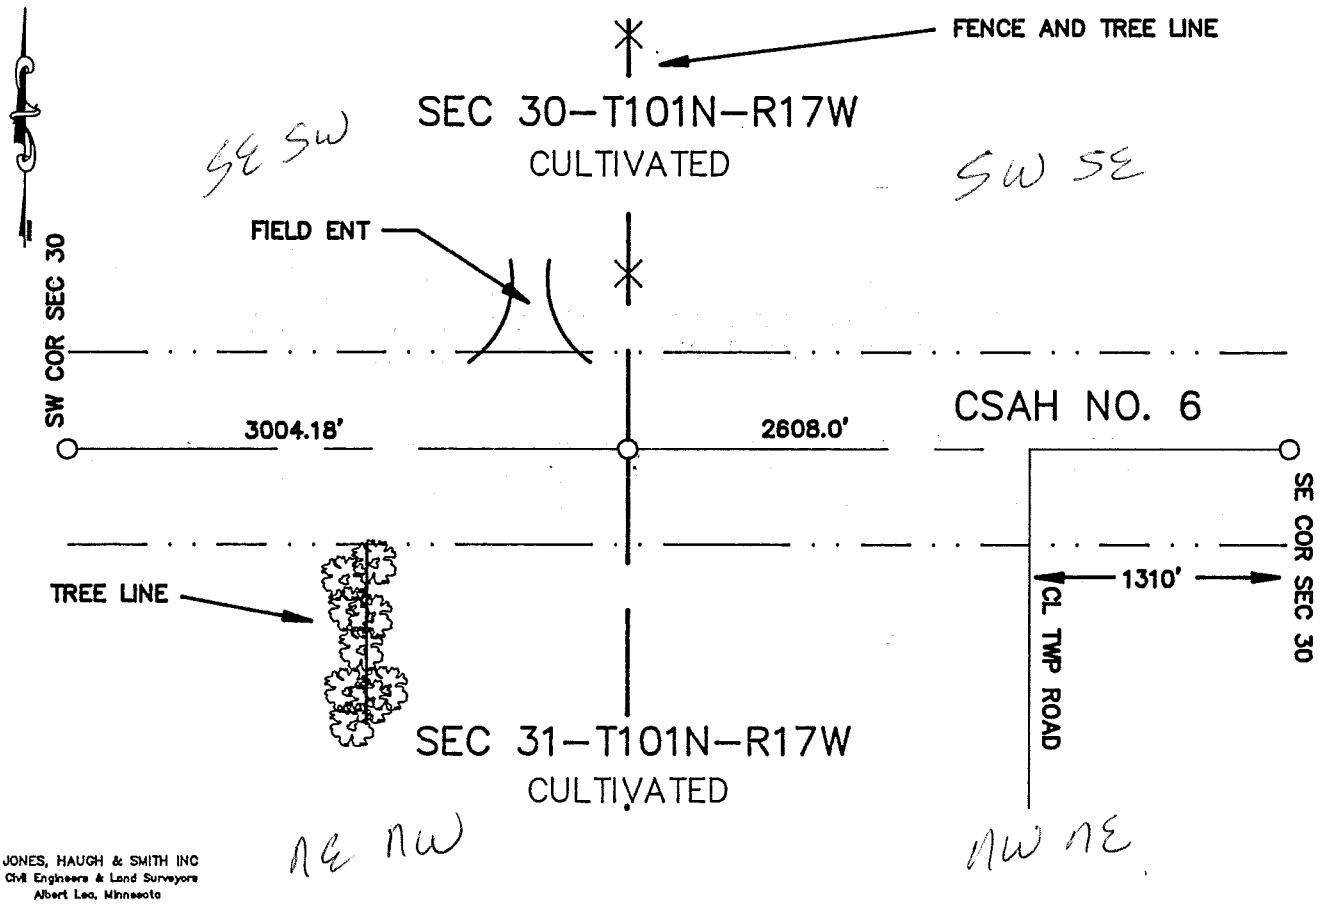

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 446970

BOOK 92 PAGE 142

M.H.D. FORM NO. 2105

Book 92 Misc Page 142

S 1/4 Cor SEC 30-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on the CL of township road E-W and in line with line fence to the north. Uncovered no evidence of original PLS corner. Placed a concrete nail on a straight line between the SW and the SE section corners. This position is 33' east of lost position, but fits existing occupation and fence lines in section 30 and 31-101-17.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 31, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a 5/8" IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

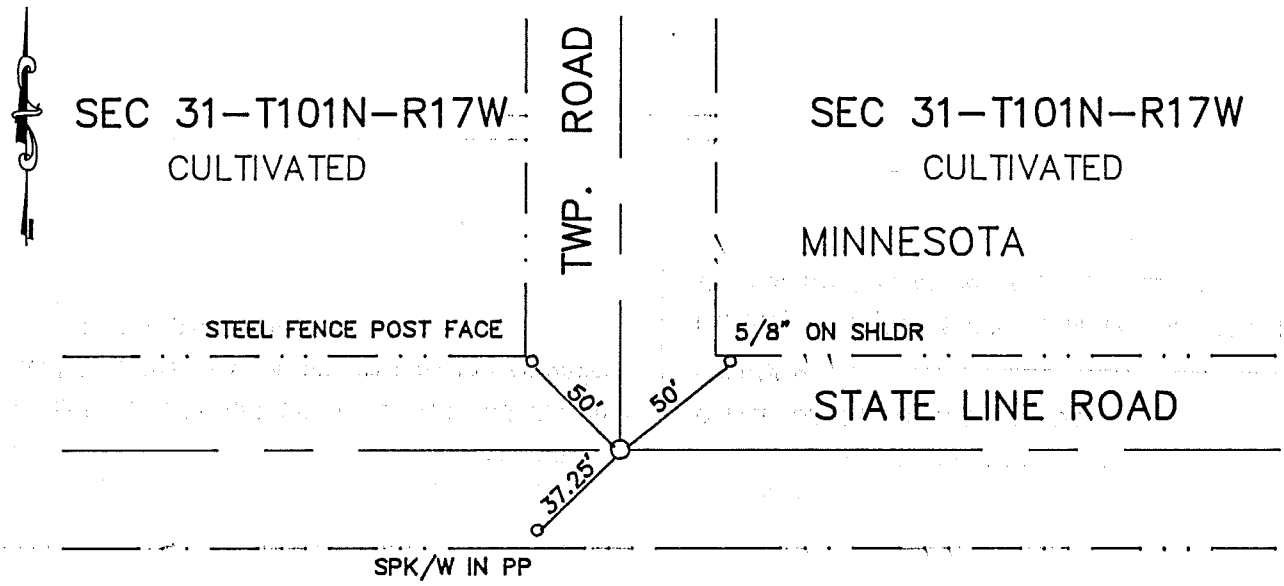

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug. A.D., 1996

COUNTY RECORDER Charles Ehrer

By Mary A Daigle, Deputy

DOCUMENT NO. 446972

M.H.D. FORM NO. 2105

Bk 92 R 146 Book 92 Misc, 146 Page

S 1/4 Cor SEC 31-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and uncovered a 5/8" iron. The location of the iron agrees with Iowa records and Mower county Hwy. Dept. records. The iron was accepted as best evidence of the true corner and a cast iron monument was placed over.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 31, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

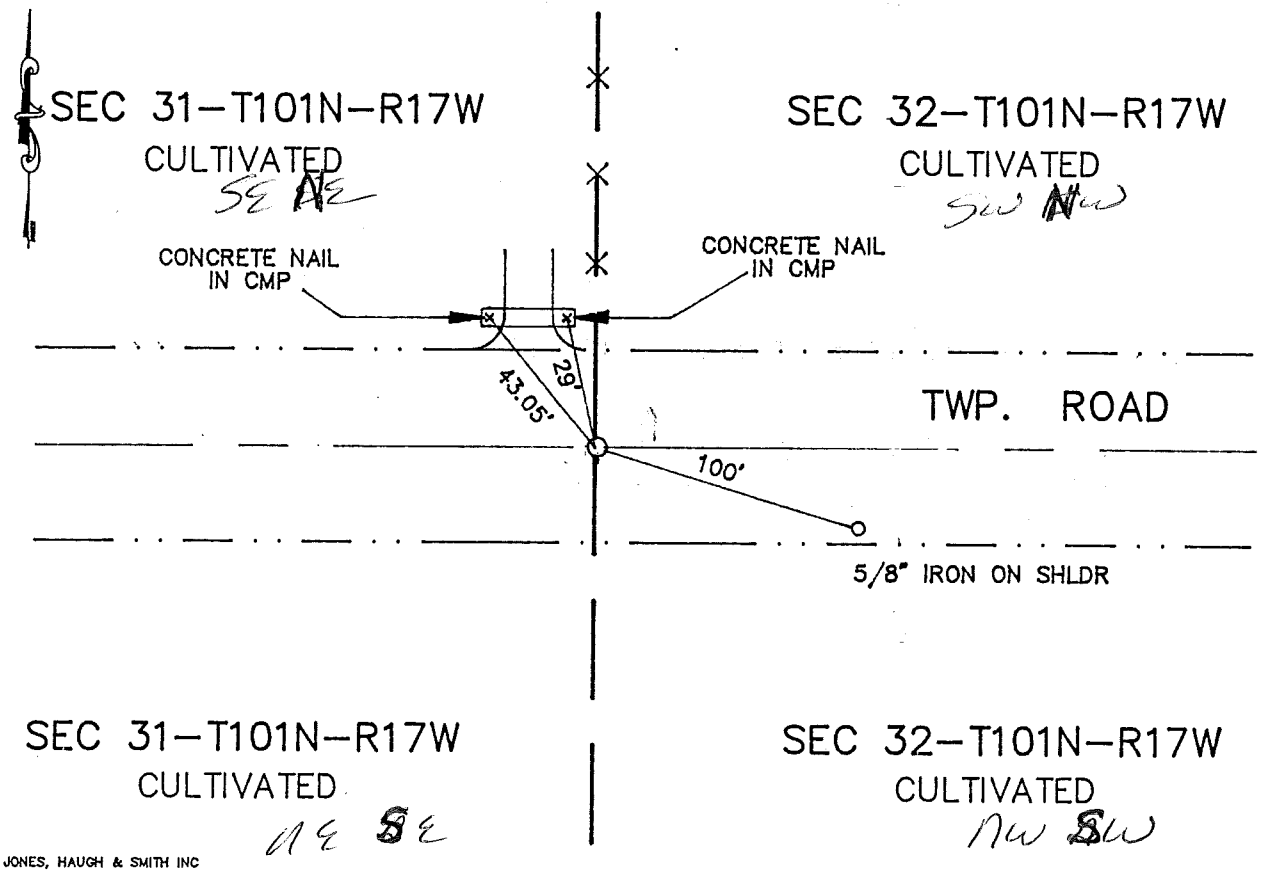

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-31-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 446971

BOOK 92 PAGE 144

M.H.D. FORM NO. 2105

Book 92 Page 144 Misc

E 1/4 Cor SEC 31-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp. road and in line with fence to the north, but found no evidence of the corner. Set a 5/8" iron on the CL of the road in line with the fence to the north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

P 42 "B"

NORTHWEST Corner of Section 31, Township 101 N, Range 17 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


the corner location shown on the sketch:

On _____ found A 7"N-S X 4" E-W X 8" HIGH CHIPPED LIMESTONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-28-89 placed CTY. MON. OVER LIMESTONE

SKETCH OF REFERENCE TIES

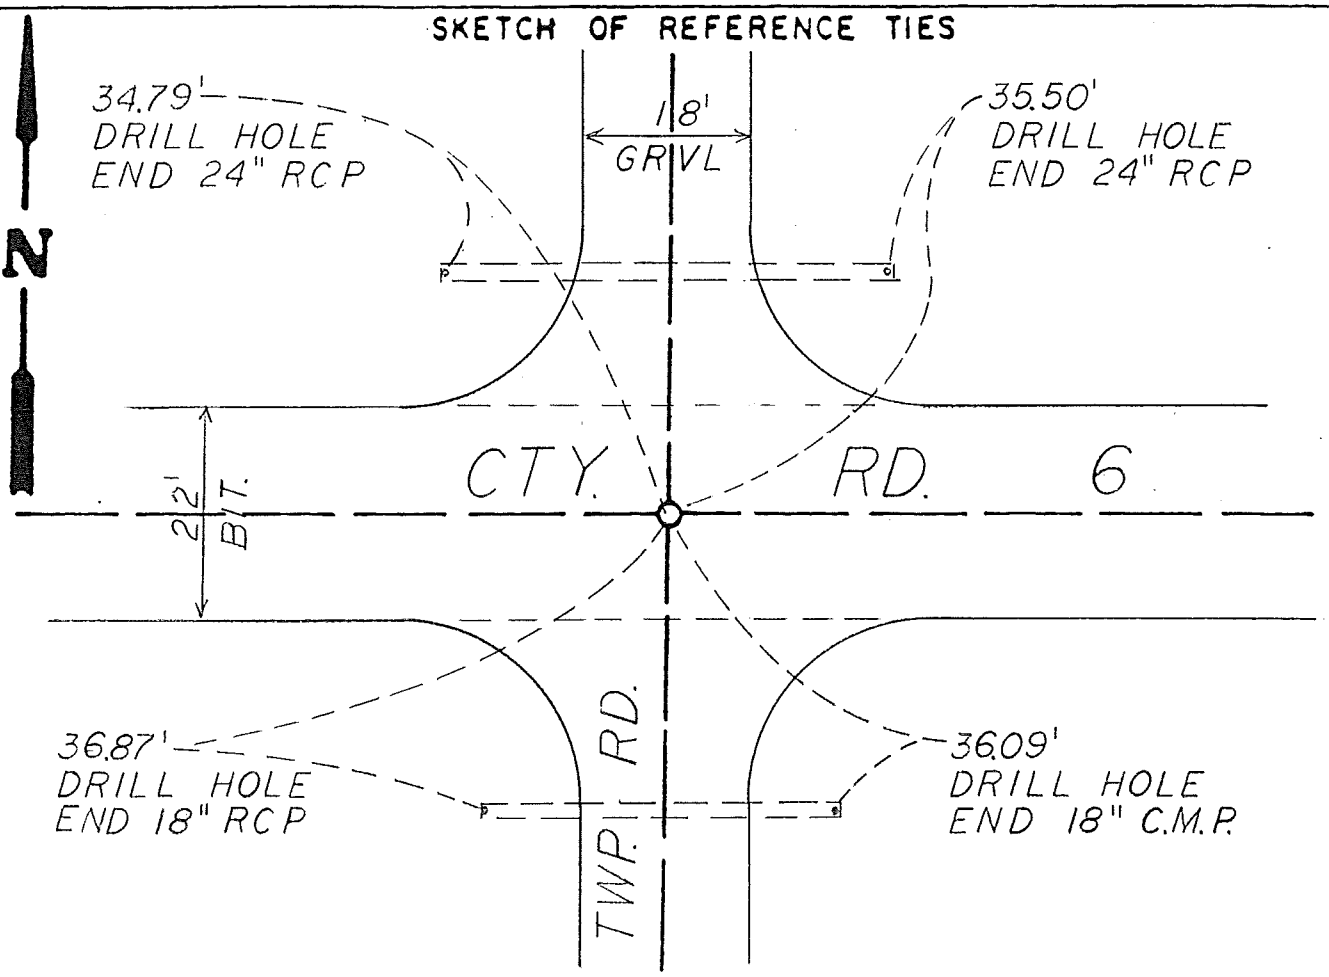

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHWEST CORNER SECTION 31, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

August, 1853 — Elisha Norris, Deputy Surveyor, set post for corner and built a mound with trench per instructions. Drove a charred stake in center and planted Osage Orange seed in SE corner, during the original Public Land Survey.

1930 — Mower County Engineer's Plans for County Aid Job C3 show ties to the Sec. cor. No monument was shown.

1950 — Mower County Engineer's Plans for the County Road show new ties to the Sec. Cor. No Monument was shown.

Sept. 28, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 6 feet E-W by 4 feet N-S by 4 feet deep to natural ground centered at the intersection of the roads and found a 7inch N-S by 4inch E-W by 8 inch high chipped Limestone 3.5 feet below the surface in blue clay surrounded by black mottled soil. The stone was found 1 foot south of the center of the intersection. A 2 inch by 9 inch high wood stake and a 1/2 inch rod with a hub were found over the limestone. A spike & washer was found at the surface 0.6 foot easterly of the limestone. A 1 inch by 12 inch rebar was placed on the east side of the Limestone before back filling.

An analysis of the record data gives no indication of the origin of the stone. The limestone was used by early surveyors to mark other corners in the area and it agrees with the lines of occupation. The location of the stone has also been maintained by the County since 1930. The stone is accepted as marking the location of the original Public Land Survey Corner.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1996 (DATE) found a BENT 2.5' IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

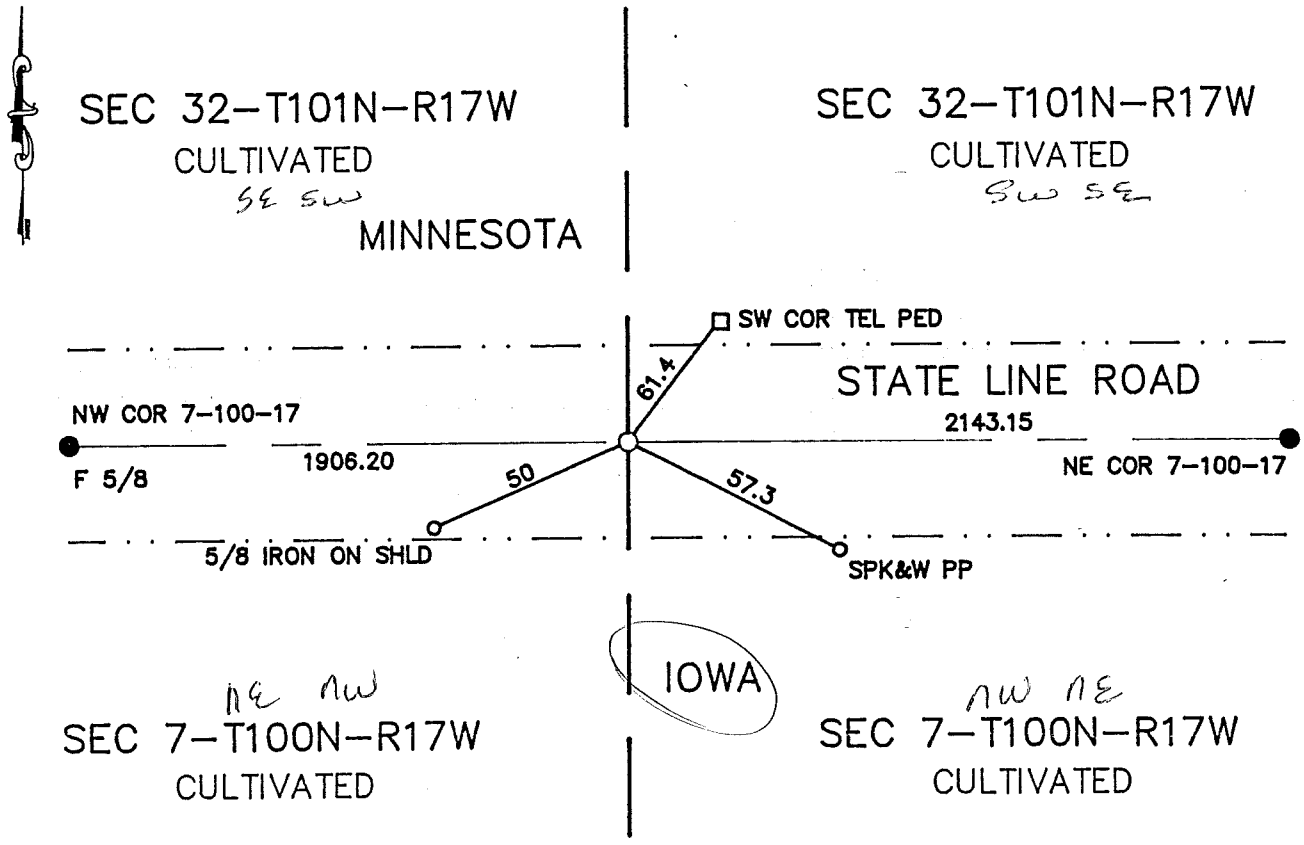

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447102

M.H.D. FORM NO. 2105 BOOK 92 PAGE 174 Book 92 Misc Page 174

S 1/4 Cor SEC 32-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1932 Iowa records show this corner to be 1906.2' east of the NW corner of section 7-100-17 and 2142.4' west of the NE corner of the same section.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, using Iowa records, dug by hand at this location and uncovered a bent 2.5' iron. The bent iron was removed and replaced by cast iron monument. The corner is 1906.2' east of the NW corner of section 7-100-17, and 2143.15' vs. 2142.3' west of the NE cor 7-100-17.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 32, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On — (DATE) found a —

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

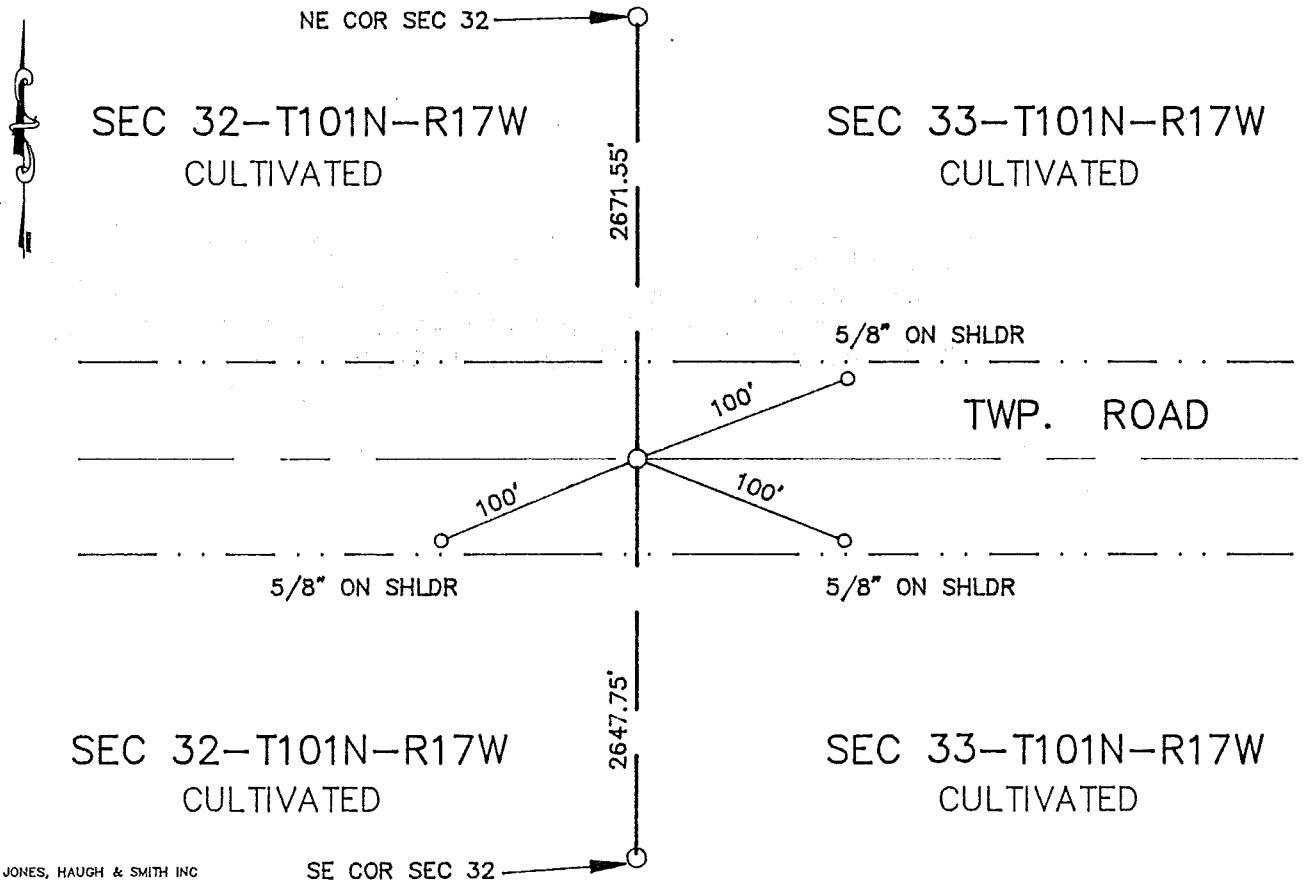

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 12 day of August A.D., 1996

COUNTY RECORDER Marilyn Enger

By _____, Deputy

DOCUMENT NO. 44703

Book 92 Page 176

M.H.D. FORM NO. 2105

E 1/4 Cor SEC 32-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on CL twp. road 5293' west of the W 1/4 corner. Dug to virgin soil but found no evidence of the corner. A cast iron monument was placed on CL of the E-W road on a straight line between the NE and SE section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 33, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

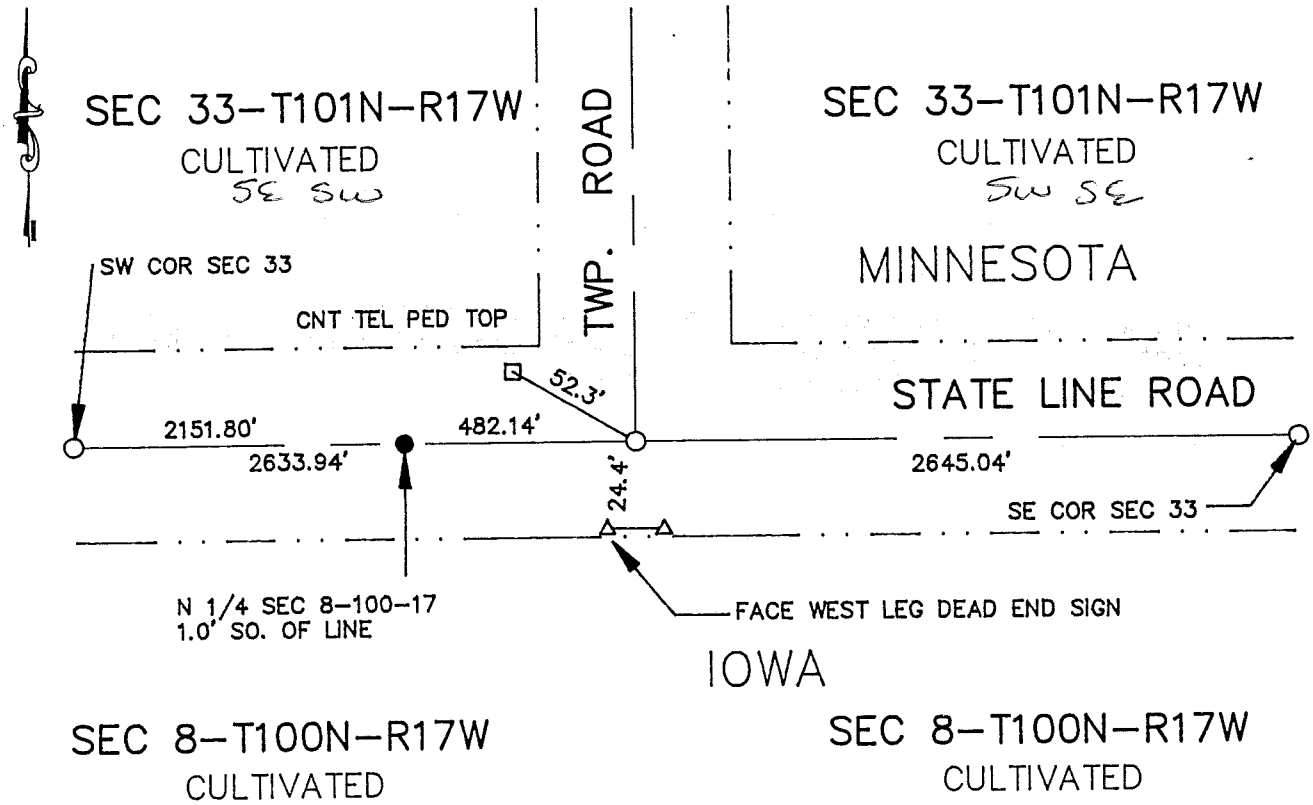

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447105

M.H.D. FORM NO. 2105 BOOK 92 PAGE 180

Book 92 Misc Page 180

S 1/4 Cor SEC 33-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp. road and state line road. Dug to virgin soil but found no evidence of corner. Set cast iron monument on state line between the N 1/4 corner section 9-100-17 and the S 1/4 corner section 32-101-17, in line with the CL of the twp. road to the north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

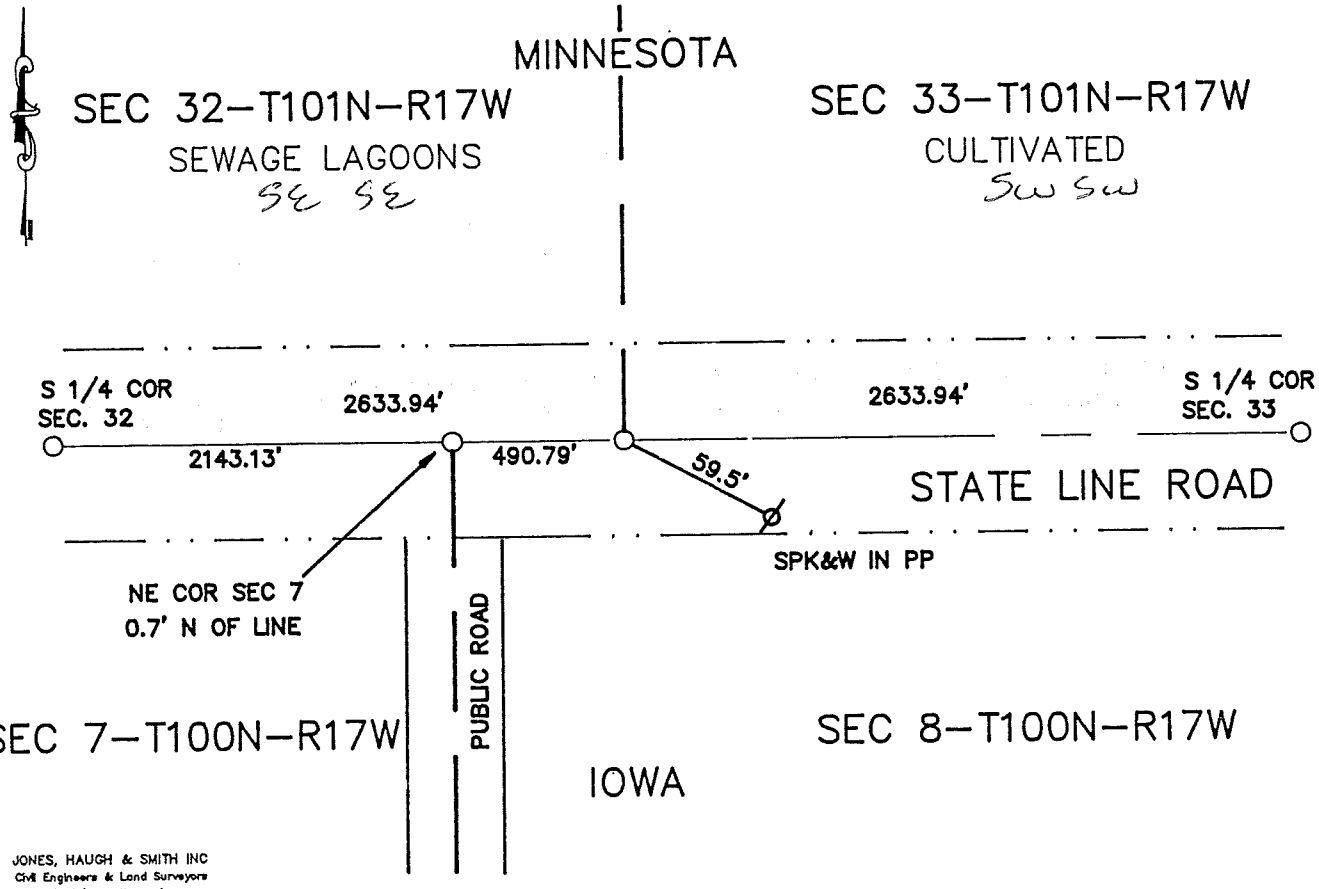

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 12 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447104

M.H.D. FORM NO. 2105 BOOK 92 PAGE 178

Book 92 Misc Page 178

SW Cor SEC 33-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL state line road 2640' west of the S 1/4 corner section 31. No evidence of the corner was found. A cast iron monument was set at the midpoint of a straight line between the S 1/4 corner of section 32 and at the S 1/4 corner of section 33.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 34, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1996 (DATE) placed a CAST IRON MONUMENT AT 3 WAY FENCE INTER.

SKETCH OF REFERENCE TIES

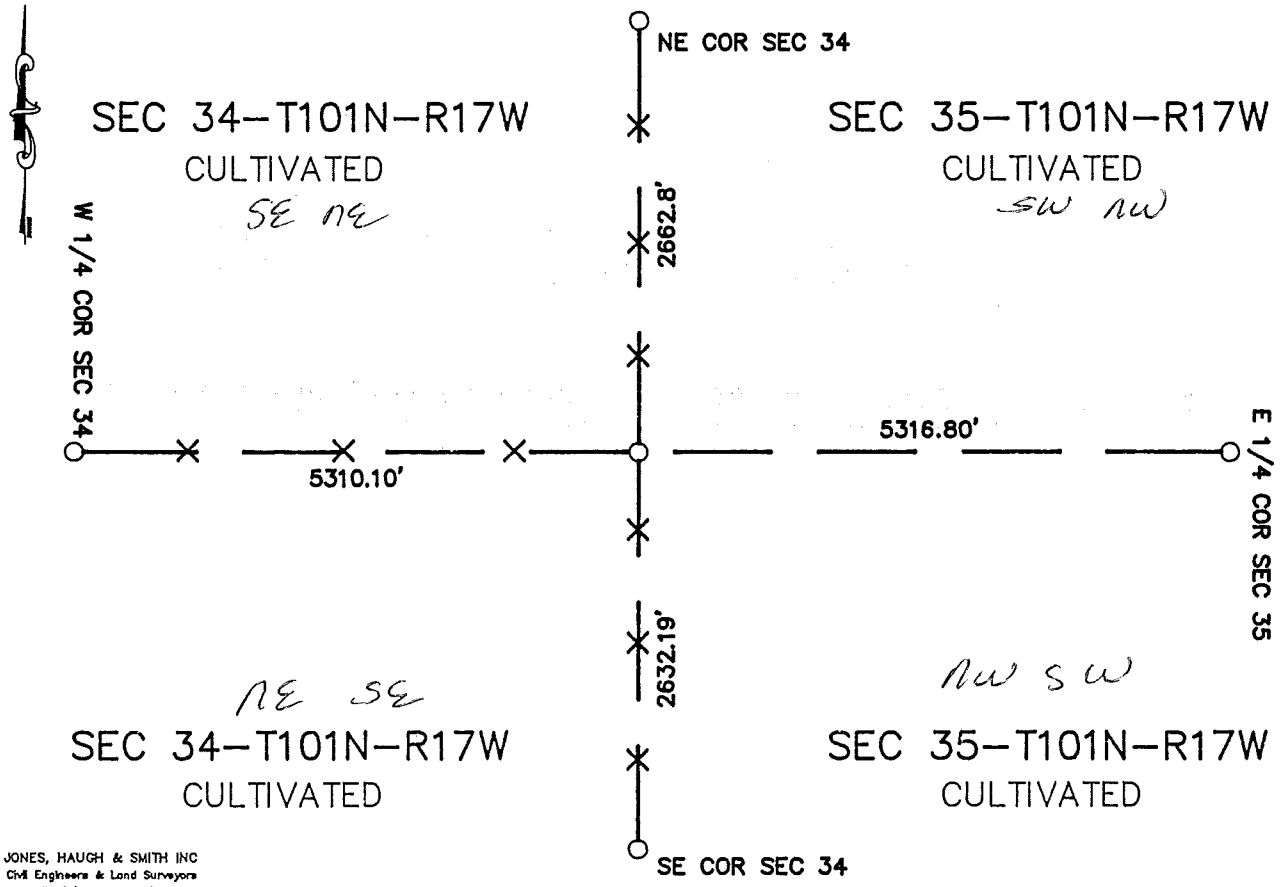

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 12 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen
By Susan M. Davis, Deputy
DOCUMENT NO. 447106

M.H.D. FORM NO. 2105 BOOK 92 PAGE 182

Book 92 Misc Page 182

E 1/4 Cor SEC 34-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a three way fence intersection. Accepted fence intersection as best evidence of the original corner and set a cast iron monument at the ground surface in line with fences N-S-W.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 34, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

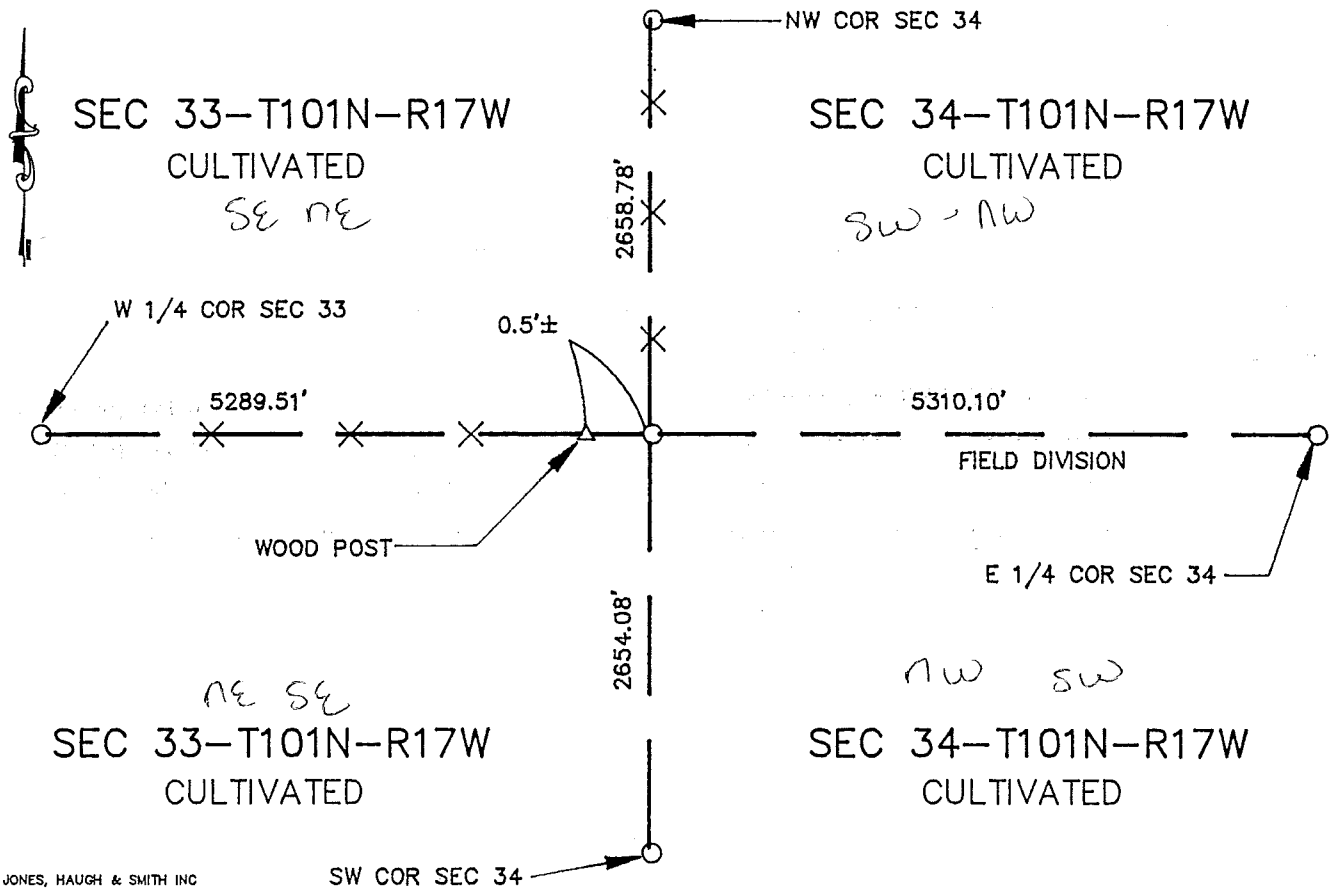

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 13 day of Aug A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 447146

M.H.D. FORM NO. 2105 BOOK 92 PAGE 189

Book 92 Misc Page 189

W 1/4 Cor SEC 34-101-17

This corner was originally established by Deputy Surveyors Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found wood post at three way fence intersection. Accepted wood post as best evidence of the PLS corner and placed a cast iron monument 0.5' east of the wood post, in line with fences north and west, and in line with field division east.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 34, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

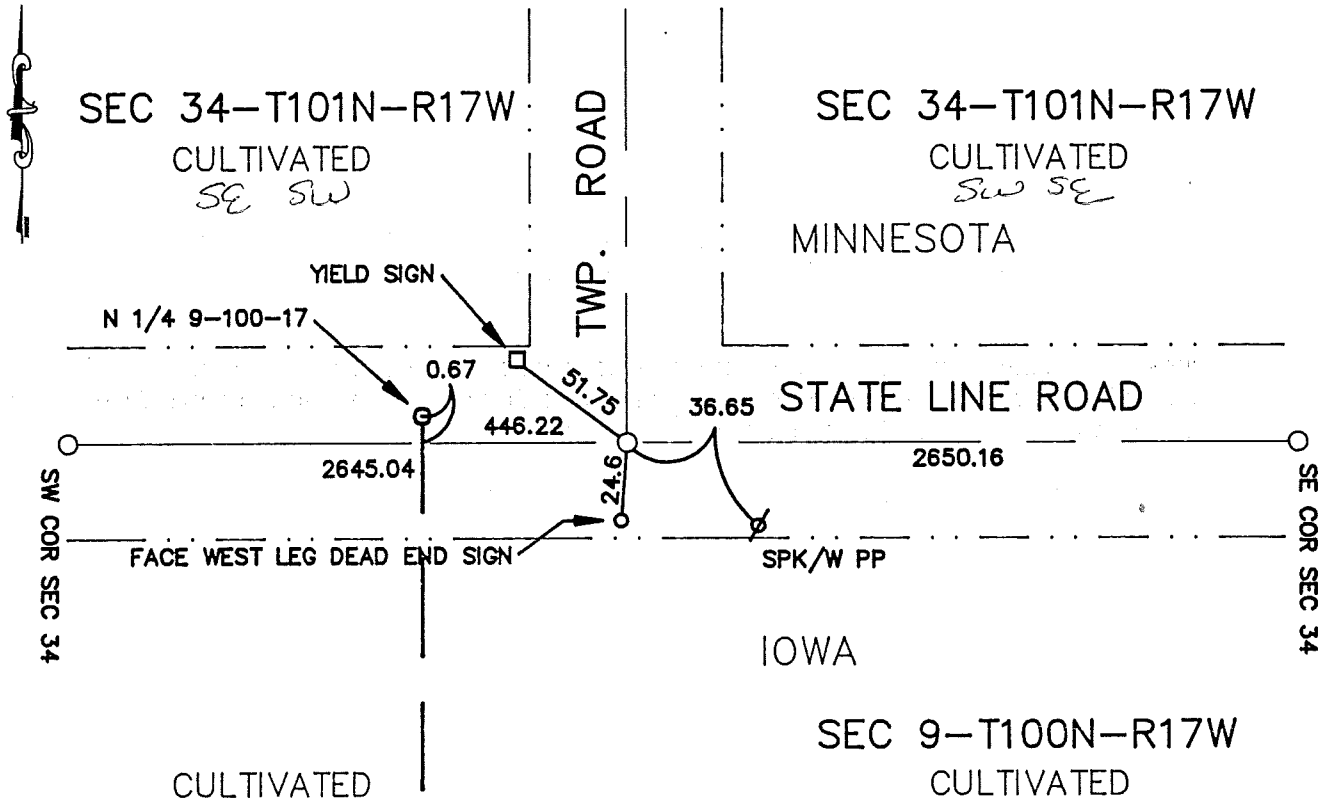

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4P .M. on the 13 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447148

M.H.D. FORM NO. 2105 BOOK 92 PAGE 193

Book 92 Misc Page 193

S 1/4 Cor SEC 34-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp. road and state line road. Dug to virgin soil but found no evidence of corner. Set cast iron monument on state line between the N 1/4 corner section 9-100-17 and the S 1/4 corner section 35-101-17, in line with the CL of the twp. road to the north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 34, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

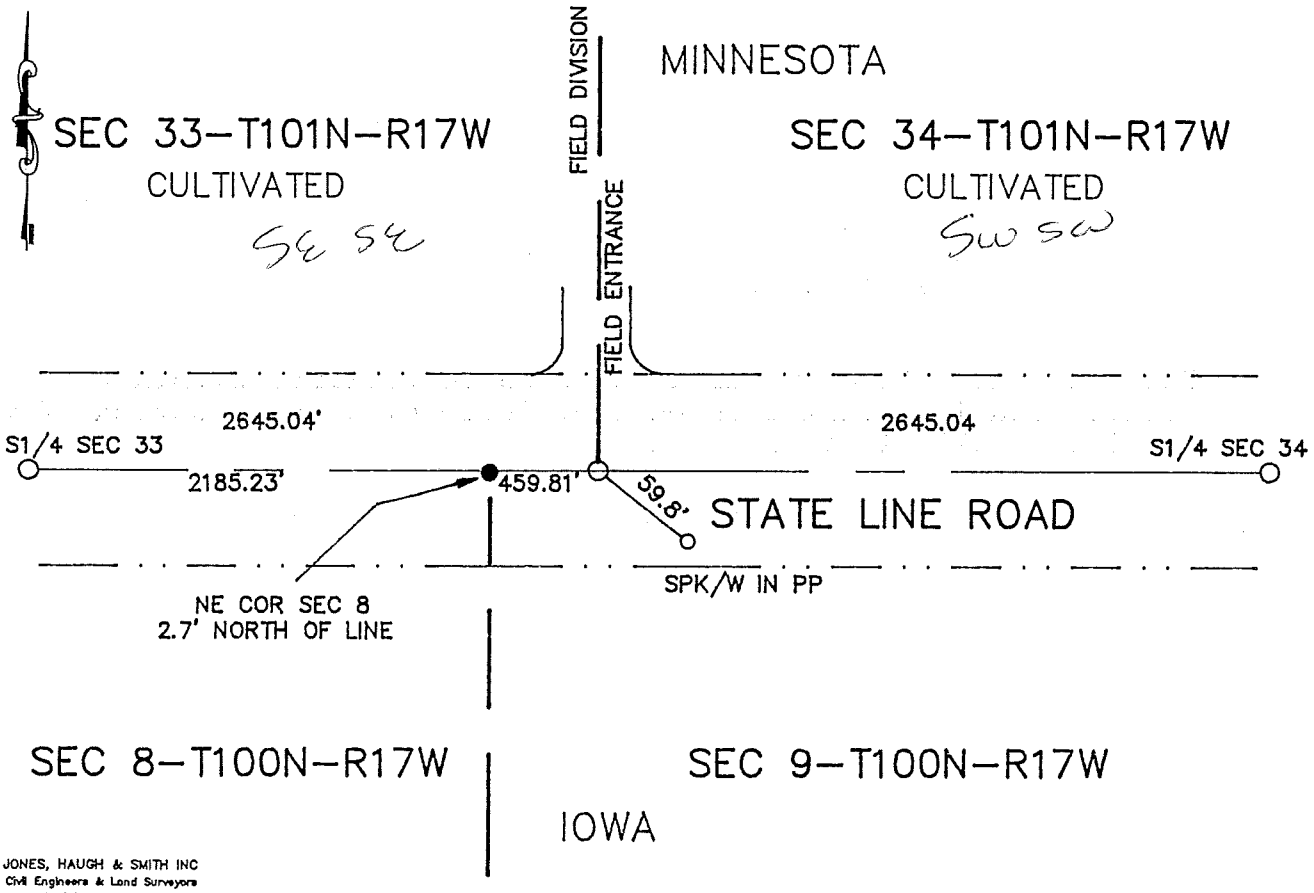

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 13 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 447147

M.H.D. FORM NO. 2105 BOOK 92 PAGE 191 Book 92 Misc Page 191

SW Cor SEC 34-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL state line road in line with a field division to the north, 2640' west of the S 1/4 corner Section 34. No evidence of the PLS corner was found. A cast iron monument was set at the midpoint of a straight line between the S 1/4 corner of Section 33 and the S 1/4 corner of Section 34.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 35, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a POINTED FIELD STONES

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

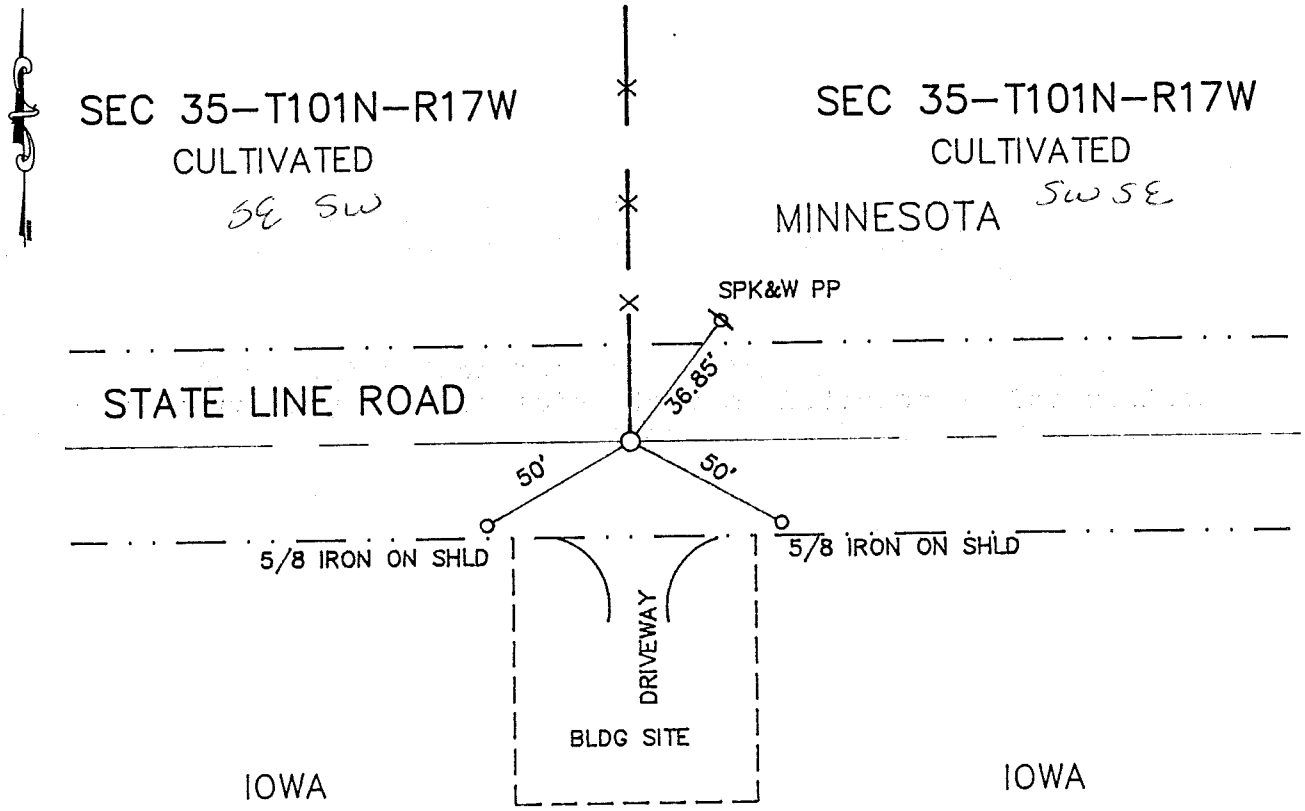

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 13 day of Aug A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 117149

M.H.D. FORM NO. 2105 BOOK 92 PAGE 195

Book 92 Misc Page 195

S 1/4 Cor SEC 35-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL state line road and in line with fenceline north. Uncovered 2 pointed stones 2' deep. The stones were in line with the fence to the north and were accepted as a perpetuation of the true corner. A 5/8 iron capped RLS 13807 was placed between the stones and a cast iron monument was placed above, at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 35, Township 101N Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On – (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

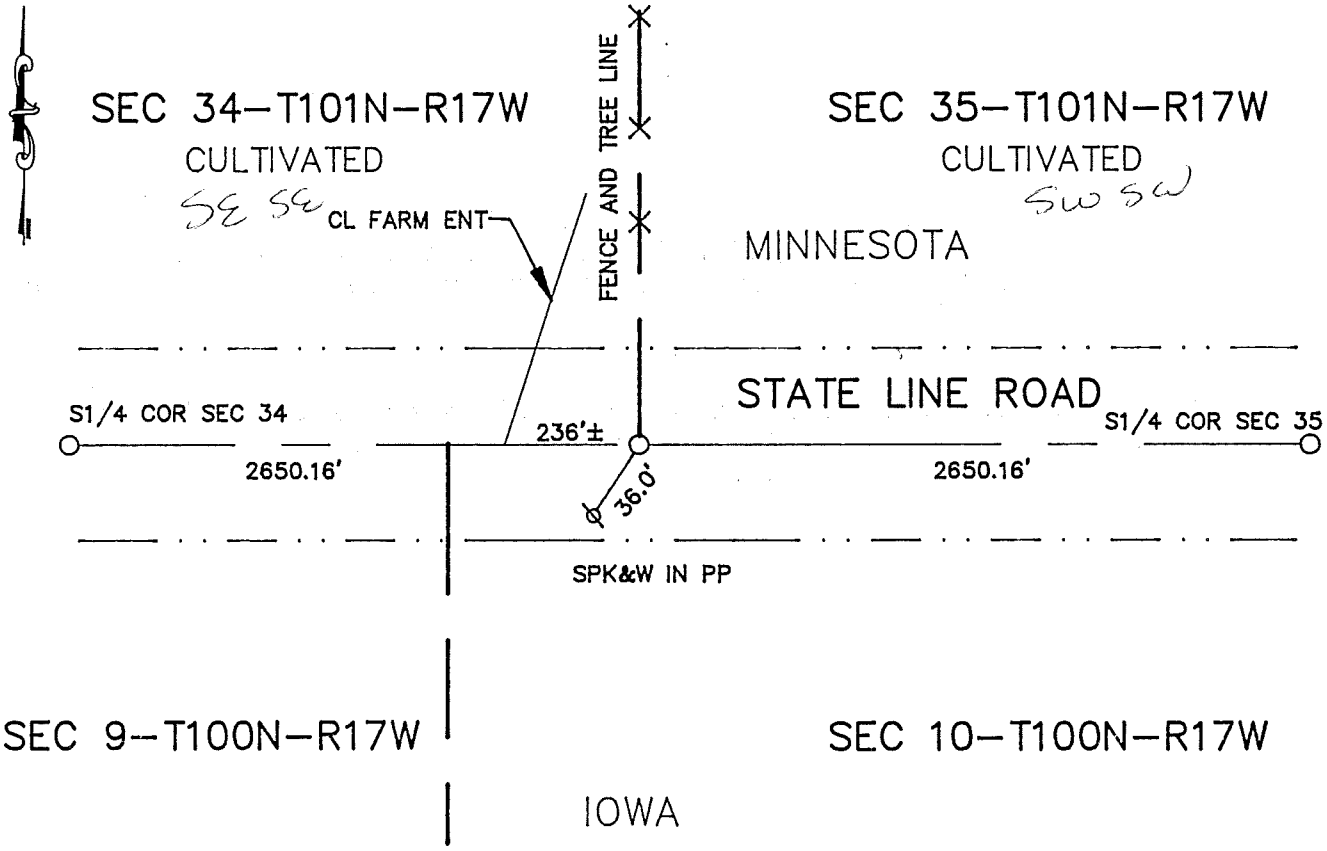

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 p .M. on the 13 day of Aug A.D., 1996

COUNTY RECORDER Charles Evgen

By Susan M. Davis, Deputy

DOCUMENT NO. 447150

M.H.D. FORM NO. 2105 BOOK 92 PAGE 197

Book 92 Misc Page 197

SW Cor SEC 35-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL state line road in line with fence line to the north, approximately 2640+- feet west of the S 1/4 corner Section 35. No evidence of the PLS corner was found. A cast iron monument was set at the midpoint of a straight line between the S 1/4 corner of Section 35 and the S 1/4 corner of Section 34.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a 1/2"ø iron capped (RJO) over a cast iron monument 1.5' deep continued digging and found a large stone with wood post on South side.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a lower section of harrison monument over stone and set cast iron monument over stone on road surface

SKETCH OF REFERENCE TIES

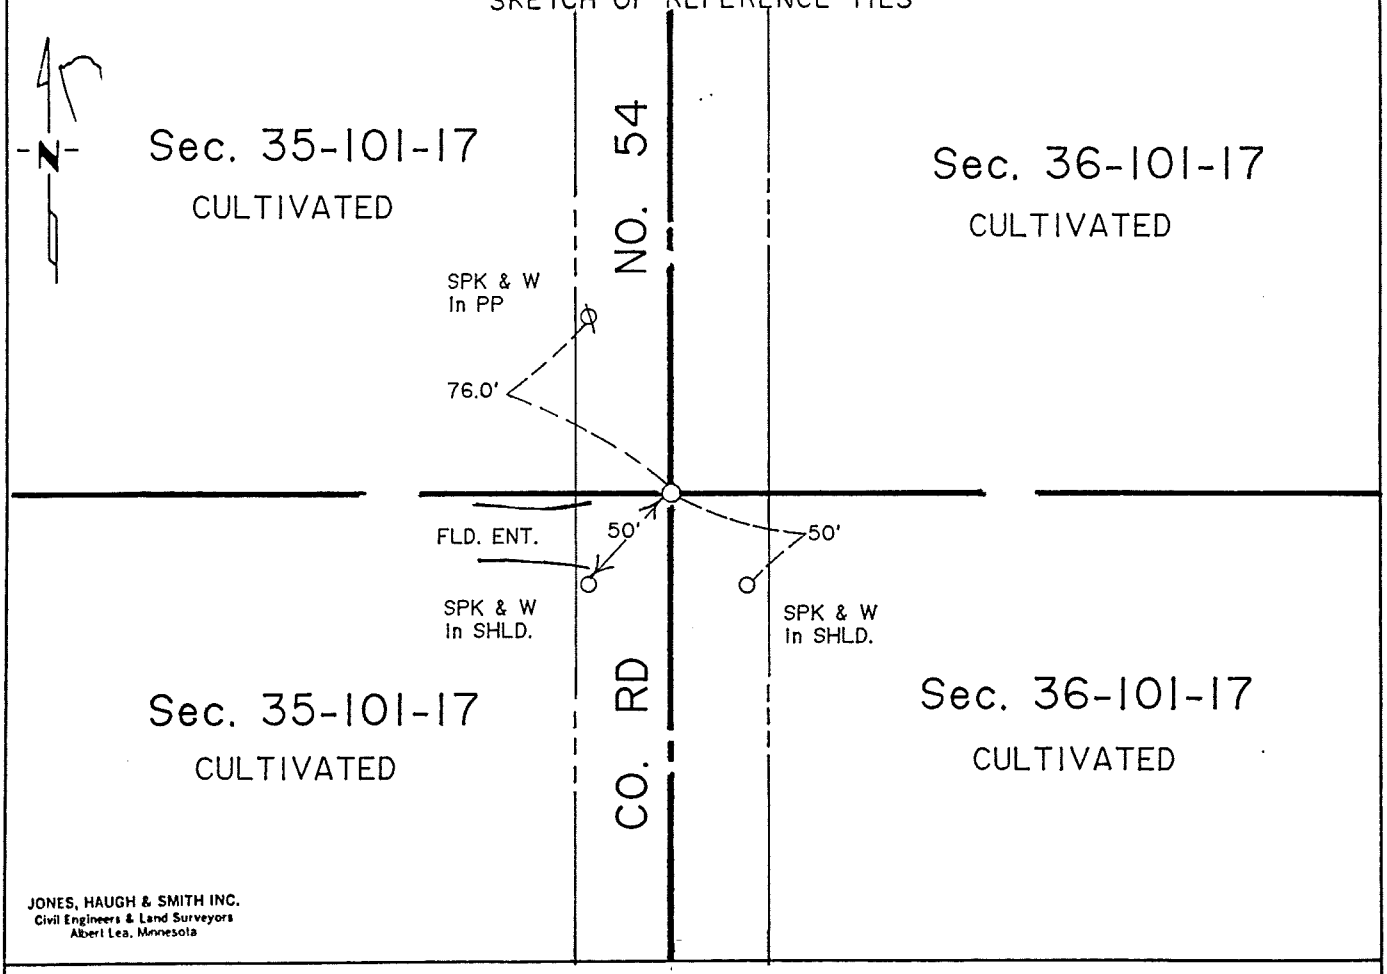

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Section 36-101-17

This corner was originally established by Deputy Surveyor Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1879 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline N-S road in line with field division west for bituminous overlay project SAP 50-619-14. Uncovered a 1/2" diameter iron capped RJO 0.5' deep. Continued digging and found a large square stone with a wood post on the south side 4.5' below the surface. Placed lower section of the harrison cast iron monument over stone and set a cast iron monument on the road surface over the stone.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 101N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-13-91 (DATE) found a harrison monument 0.5' deep over a 8"x16" long pointed field stone over a nest of small stones.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-13-91 (DATE) placed a 5/8"ø iron on East side of stone, set cast iron monument over stone at surface.

SKETCH OF REFERENCE TIES

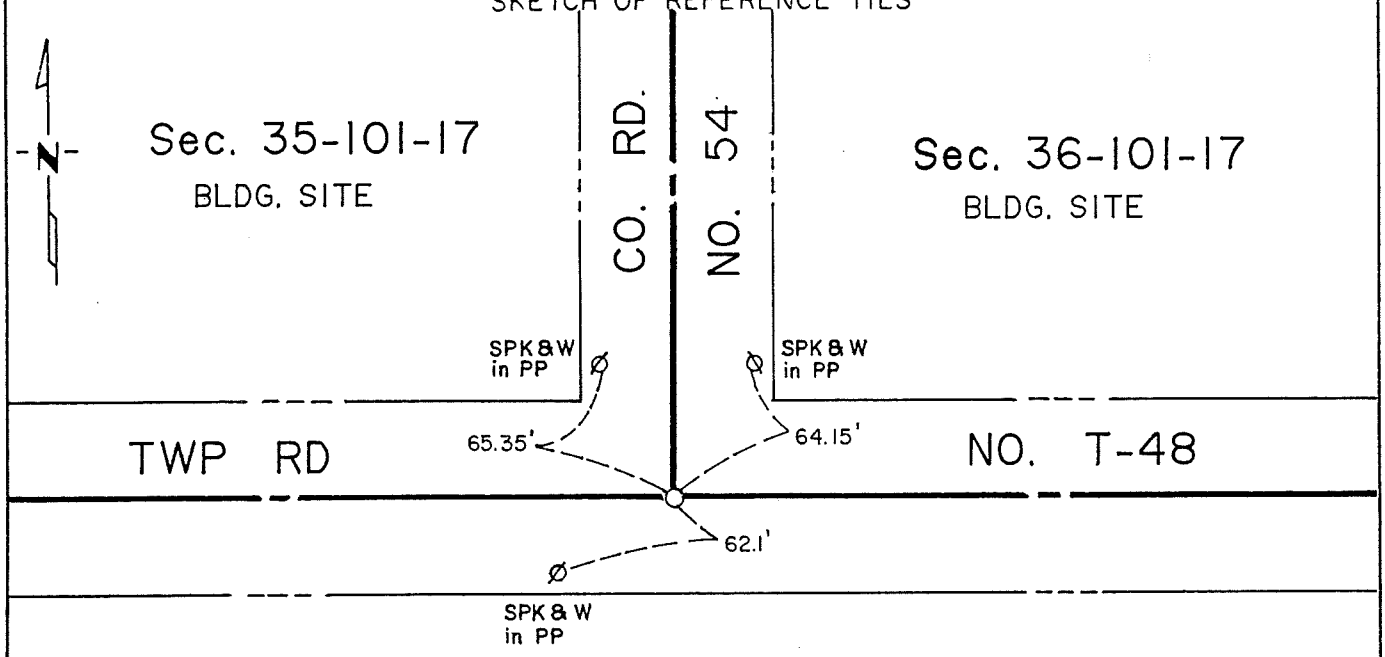

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 36-101-17

This corner was originally established by Deputy Surveyor Andrew Talcott of the U.S. General Land Office in 1852. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1879 Clausen, Mower County Surveyor 1880-1892, notes show a government post inplace.

Book "A" in the Mower County Engineers Office shows corner inplace and the following ties were taken:

50.0' NW to steel rod
50.0' SW to steel rod
50.0' NE to steel rod
50.0' SE to steel rod

1991 Jones, Haugh and Smith Inc crew, under the direction of John H. Schulte, dug with the county backhoe on centerline centerline of N-E-W roads for bituminous overlay project SAP 50-619-14. Dug a 6' x 8' x 3' deep hole and uncovered a harrison cast iron monument 0.5' deep. Continued digging and uncovered a 8" x 16" long pointed field stone over a nest of 4 small stones 3' below the surface in virgin soil. Placed a 5/8" iron on east side of the stone and a cast iron monument on the road surface over the stone.

The monument placed fits occupation is within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.