Index No. "J" p. 74

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 6, Township 101N, Range 17W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 11-12-87 (DATE) found a 3" dia. charred wood post

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-12-87 (DATE) placed a Cast iron monument stamped "1/4" Corner"

SKETCH OF REFERENCE TIES

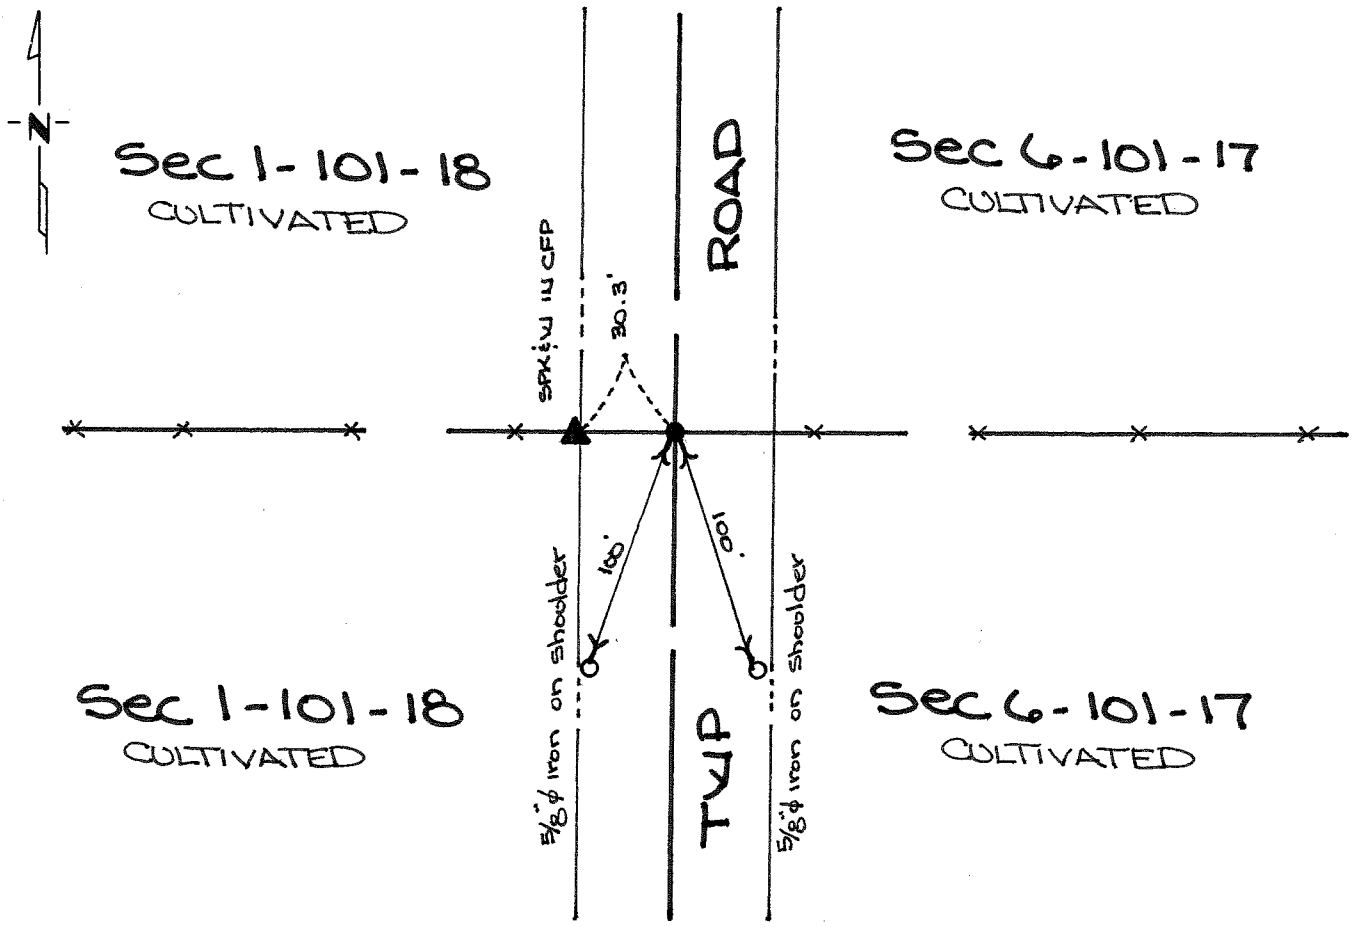

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 11-25-87
SIGNATURE DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W¼ corner Section 6-101-17

This corner was orignally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show corner was marked with a wood post and made mound of earth and trench.

Nov. 1987 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department

During researching corner no information was obtained of any perpetuation of ¼ corner.

November 1987 Jones, Haugh & Smith Inc crew dug with County backhoe on centerline of north-south road in line with fence lines; east and west at a depth of 2.5 feet below road surface in virgin soil a 3" diameter charred wood post was uncovered. Set a cast iron monument stamped "¼ corner" over the location of wood post.

Monument found fits occupation and road centerlines within the section and is accepted as the public land survey corner or a perpetuation thereof.