Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 1, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/21/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/21/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

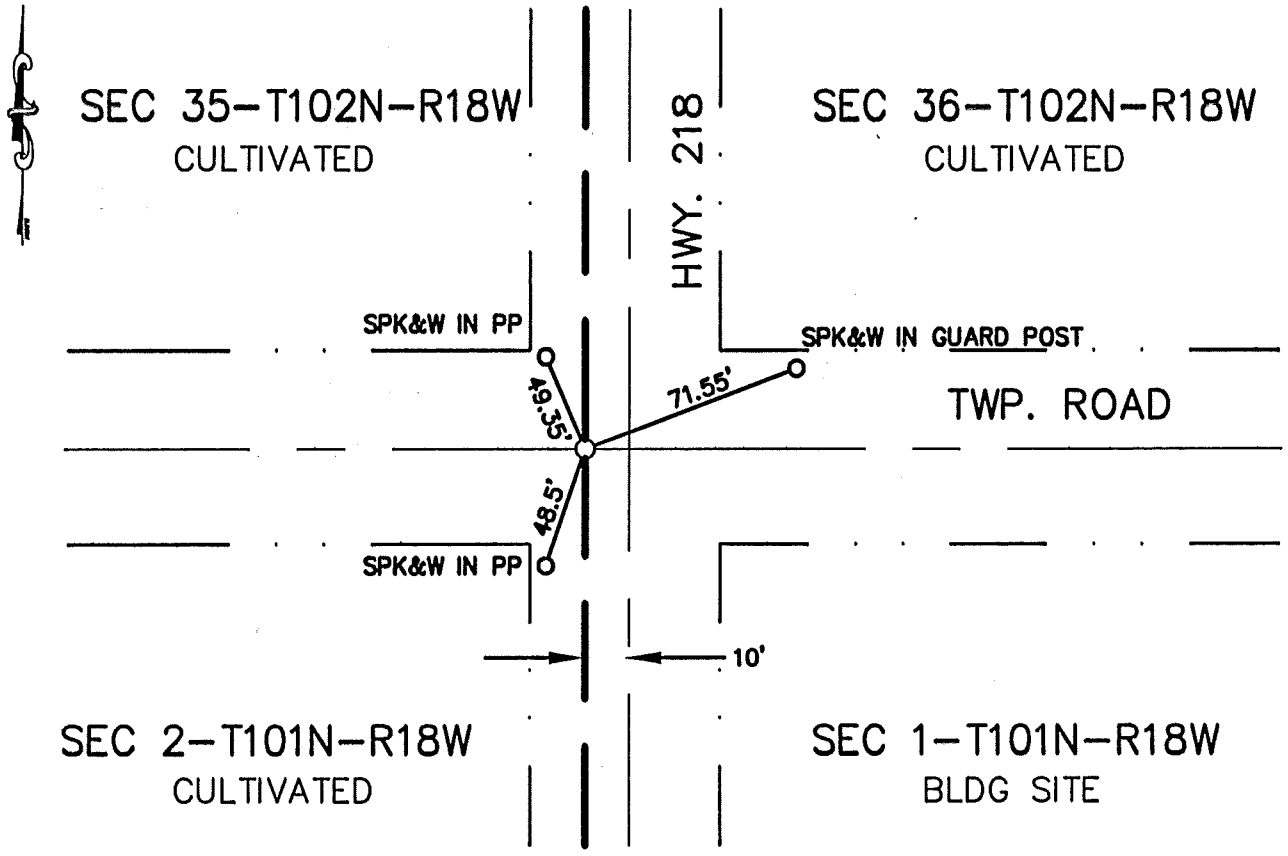

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-19-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor SEC 1-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 10' east of CL TH. 218 and CL twp. road. Found concrete monument below road surface and set a cast iron monument over, at the road surface. This location is in agreement with TH #218 R/W plan and location used in past surveys.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

35, 36, T. 102 N. (Lyle Twps.)

Corner to Sec. 2, 1, T. 101 N. T. ..... R. 18 W.

State of Minnesota }
County of Mower } ss.

Tie book P. 86

I hereby certify that on the first day of June 19 29.

I found the Section Corner referred to above

which was evidenced by Iron stake


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two

reference or witness monuments consisting of 6 inch willow and 6 inch balsam trees

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

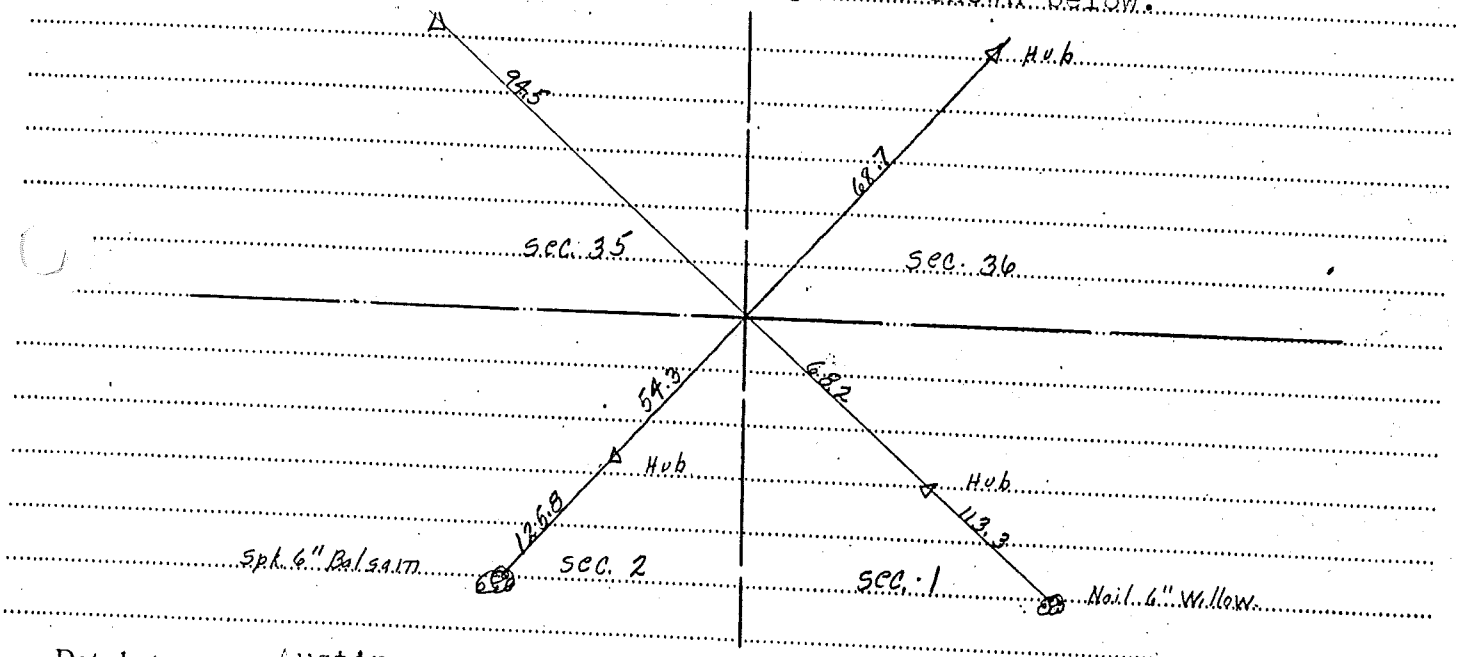

Dated at Austin Minn., this 29th day of December 19 29.

Resident Engineer

OFFICE OF REGISTER OF DEEDS }
County of ..... } ss.

I hereby certify that the within instrument was filed in this office for record on the ..... day of ..... A. D. 19 ..... at ..... o'clock ..... M.

Register of Deeds

By ..... Deputy

F

G