I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

7-29-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=N133184.36 Latitude=N043°35'13.165320"
Easting=E754508.60 Longitude=W092°59'22.152814"

A689084

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:16 AM

PACKAGE: 110305 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section **33**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **4/11/2025** (DATE) found a **5/8" REBAR**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

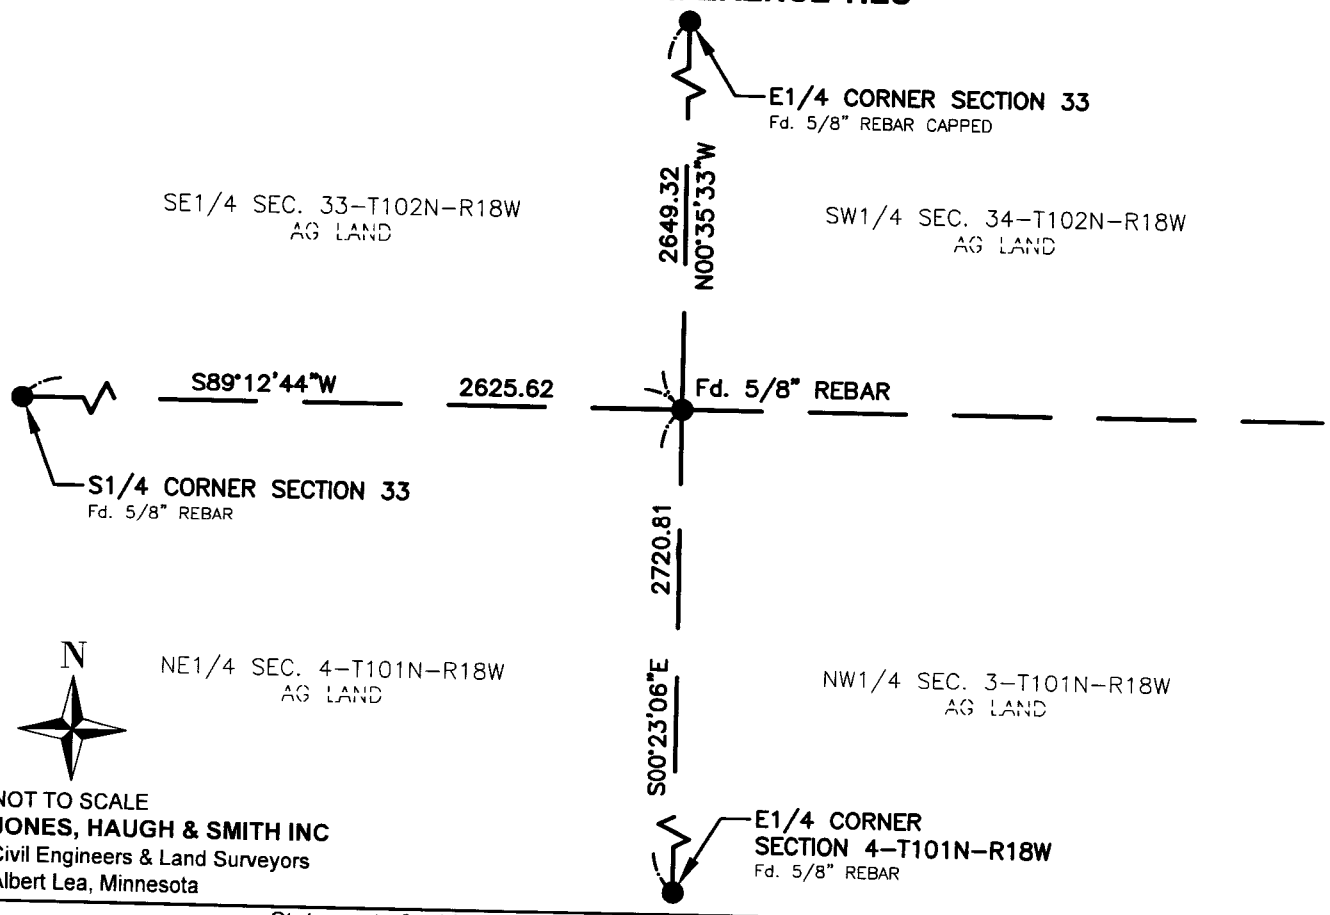

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

SE Corner Section 33-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

November 18, 1993: Jones, Haugh & Smith crew searched area and found old wood fence post. Accepted fence post as marking location of the original public land survey corner and set 5/8" rebar & yellow cap stamped 13807 in fence post.

April 11, 2025: Jones, Haugh, & Smith crew searched corner location and found a 5/8" rebar & yellow cap stamped 13807. Checked existing ties and left 5/8" rebar & yellow cap in place and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH