"E" TIE BOOK P 49. Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 5, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 7-30-76 (DATE) found a 1½ inch x 2½ inch iron bar down 0.6 foot

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

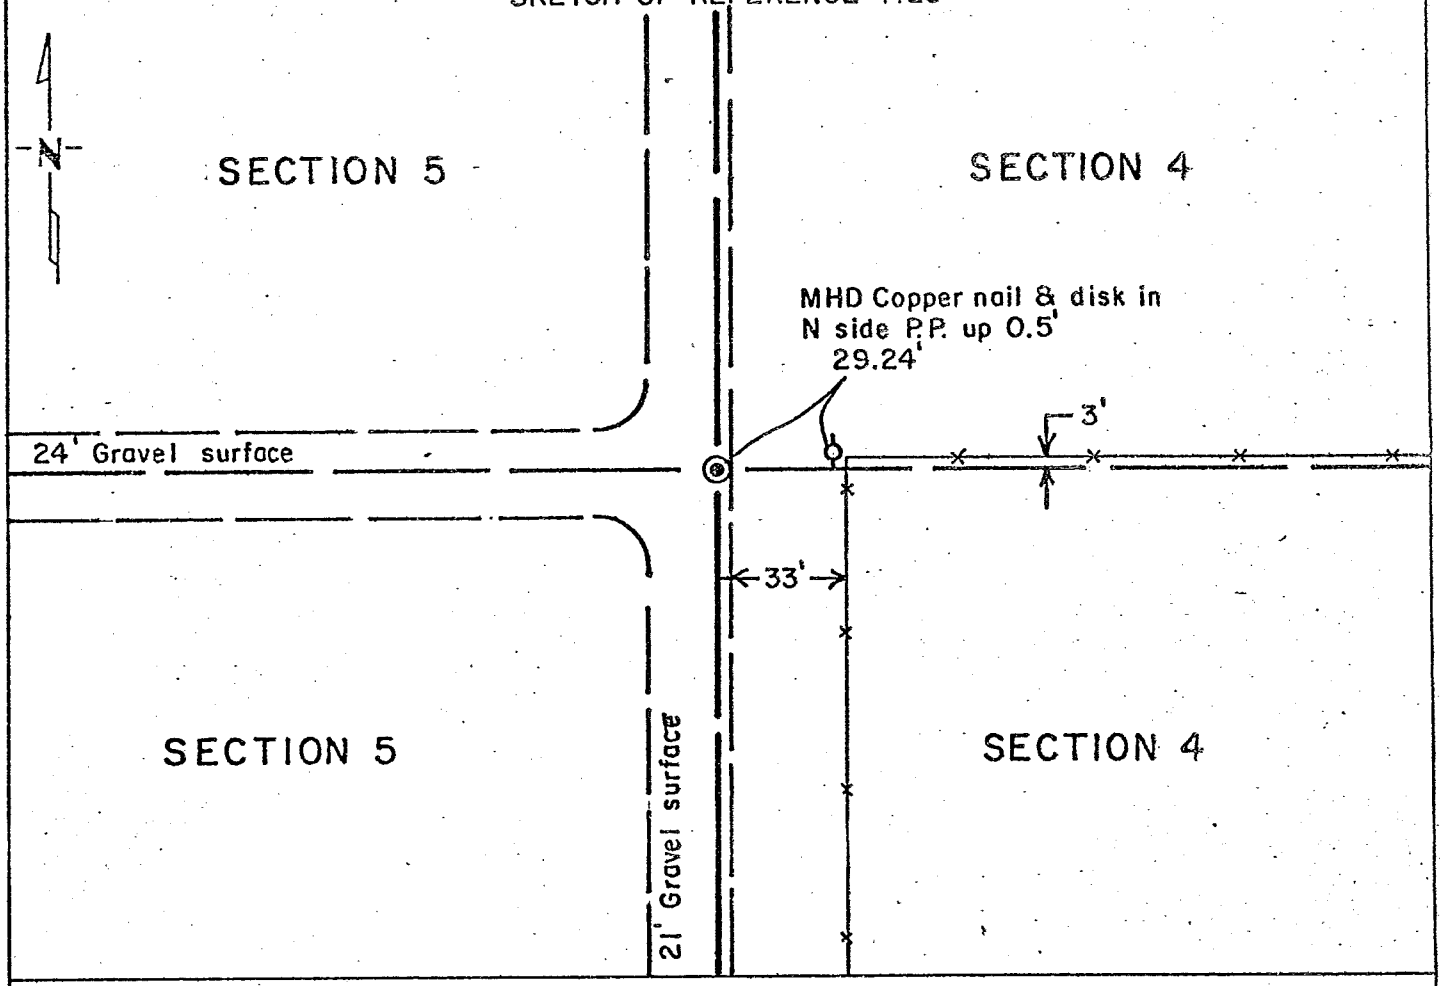


Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 1-30-78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

COUNTY RECORDER
OFFICE OF THE ~~REGISTER OF DEEDS~~
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 10:00 A .M. on the 28th day of February A.D., 19 78

County Recorder
~~Register of Deeds~~ _____

By _____, Deputy

DOCUMENT NO. 332583

M.H.D. FORM NO. 2105

Statement of Evidence:

E½ Section 5 T101N R18W 5th P.M.

July 1854 William I. Anderson, Deputy Surveyor, set a quarter section post, deposited charcoal, raised mound of earth with trench and pits during the original Public Land Survey.

March 1, 1921 M.N. Clausen, Civil Engineer and Surveyor, in a recorded plat shows an iron stake 1½" x 2½" x 30" long at the corner.

Oct. 1973 Mower County Highway Department found an iron inplace.

July 1976 Minnesota Department of Transportation recovered an 1½" x 2½" iron bar.

An analysis of the record and survey data indicates that the origin of the 1½" x 2½" iron stake is not of record, however, it is identical to other monuments placed circa 1900, the iron stake is, therefore, accepted as marking the Public Land Survey corner.

For details of the survey data contact the Surveying and Mapping section of the Department of Transportation's District Office, Rochester.