I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

4-16-25

Steven J. Thompson — Date

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN

Northing=133067.17 Latitude=N43°35'12.896988"
Easting=746611.20 Longitude=W93°01'09.458502"

A687782

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 5/20/2025 8:44 AM

PACKAGE: 108345 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section **32**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **02/10/2025** (DATE) found a **CAST IRON MONUMENT**

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

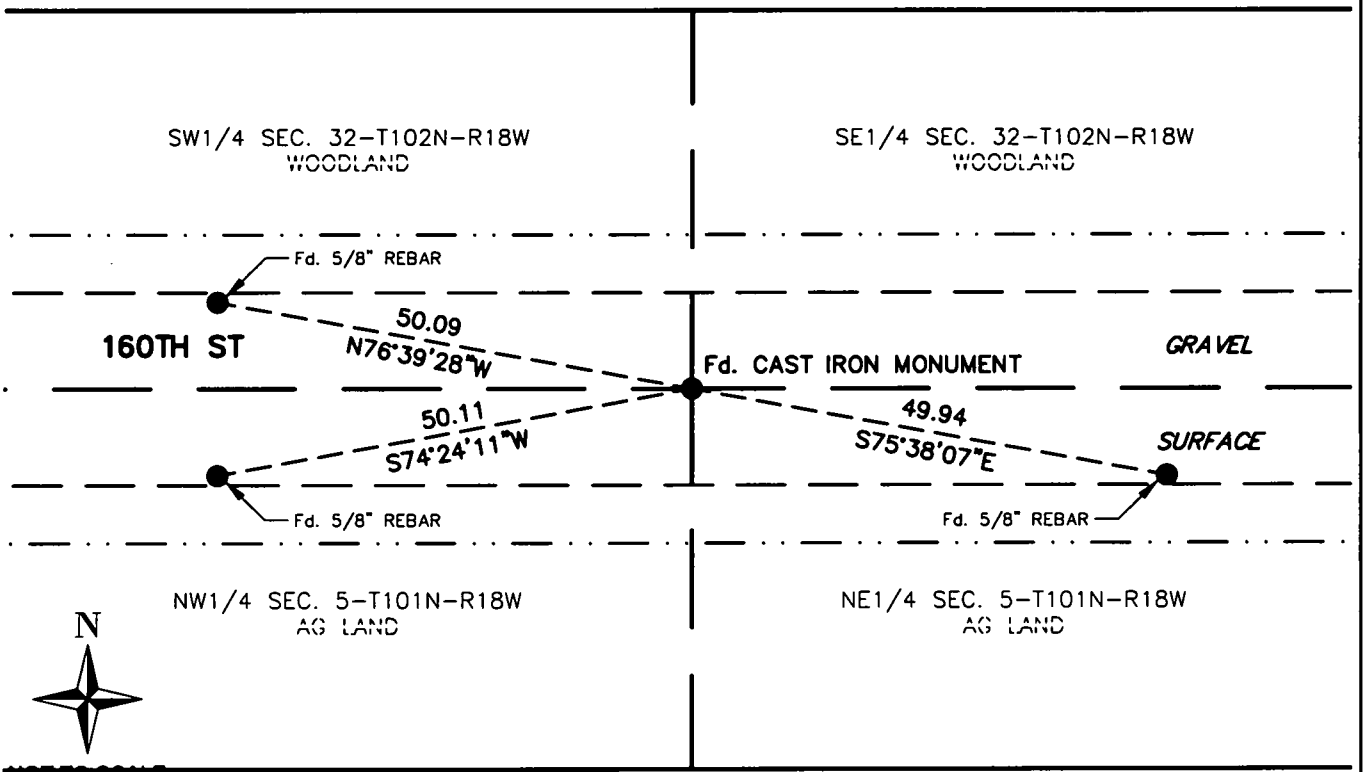

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

S1/4 Corner Section 32-T102N-R18W

This corner was established by Deputy Surveyor J.B. Reyman in May-July, 1854. The government notes show a wood post was set and mound with trench and pits per instructions.

July 7, 2003: Jones, Haugh & Smith crew dug with County backhoe on centerline E-W of township road at point used by doubling over 1/16 line from west and uncovered 1 1/2" x 3" iron 2.5' long. Left iron as found and set 5/8" x 16" iron with Cast Iron Monument over found iron 0.6± feet below road surface.

February 13, 2025: Jones, Haugh, & Smith crew recovered a Cast Iron Monument that was set in July 2003. Checked ties and left Cast Iron Monument in place.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT
CORN


EAST


NORTH