Index No. p 49, "U"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 31, Township 102N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 2-13-80 (DATE) found a 2" x 3" BAR THREE FEET DEEP PLACED A 5/8"ø IRON OVER MONUMENT FOUND

■ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 12-1-92 (DATE) placed a LEFT 5/8"ø IRON AS FOUND

SKETCH OF REFERENCE TIES

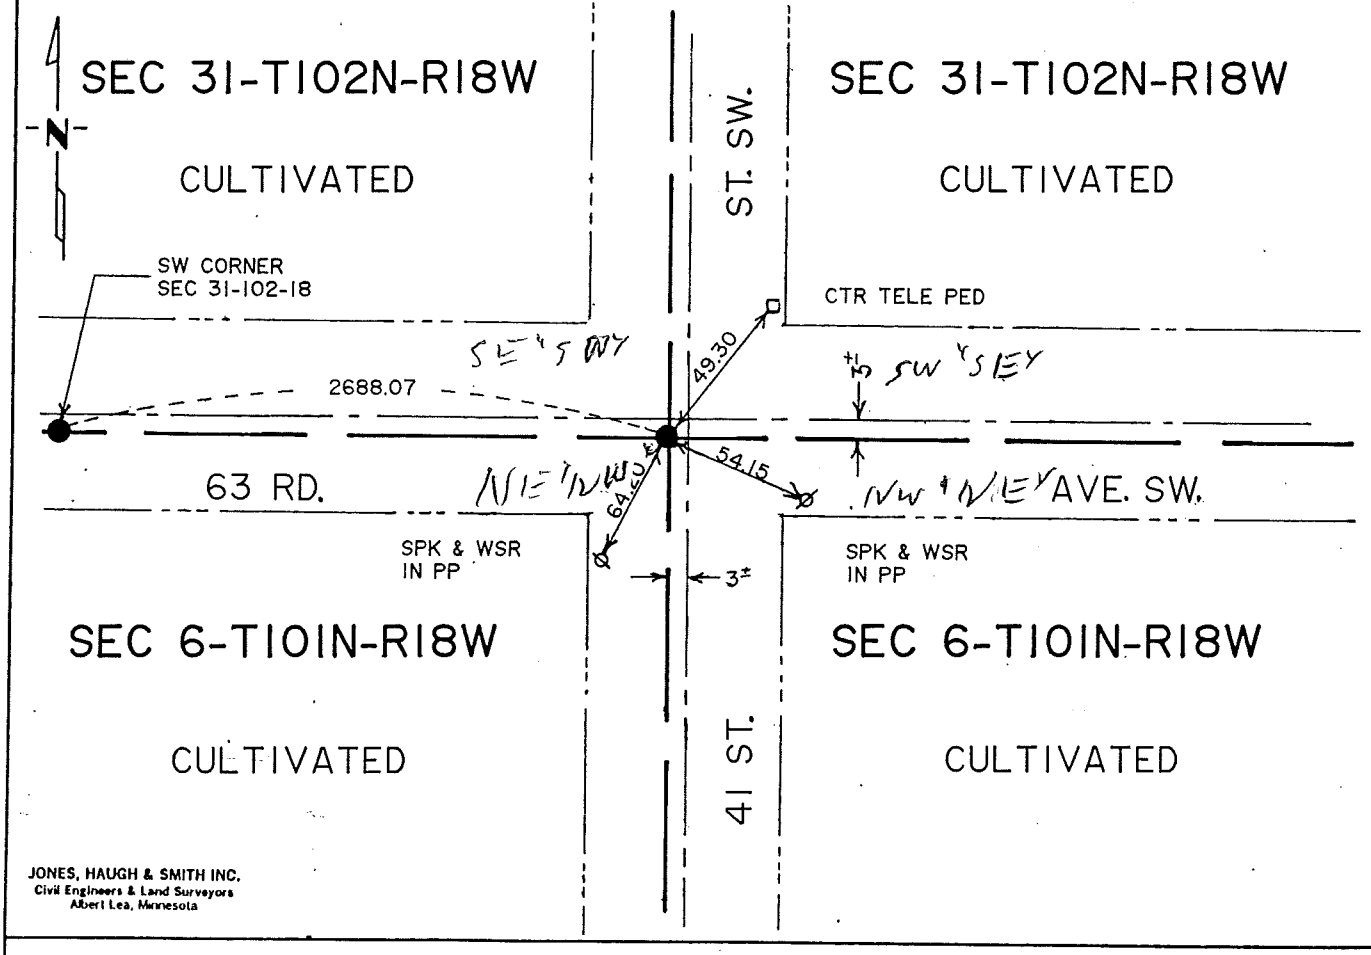

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 4-30-93 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 4 day of May A.D., 1993

COUNTY RECORDER Edward E. Enger

By Marlene Manton, Deputy

DOCUMENT NO. 420480

Bk mg misc Pg 326

M.H.D. FORM NO. 2105

BOOK 15 PAGE 326

STATEMENT OF EVIDENCE

S 1/4 corner Section 31-102-18

This corner was originally established by Deputy Surveyor Wm. I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1980 Jones, Haugh & Smith Inc crew dug a 3 foot deep hole and found a 2"x3" bar which lies in the west wheel track and south wheel track. Placed a 5/8" diameter iron near road surface above 2"x3" bar found.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, found 5/8" diameter iron set in 1980 which was placed above 2"x3" bar that was located at a depth of three feet. Accepted 2"x3" bar found in 1980 as best evidence of the location of the original public land survey corner. Left 5/8" diameter iron found in its original location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 79 PAGE 327

Jones Haugh