Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 2, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 2-13-90 (DATE) found a 1 3/4" sq. iron 2.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 2-13-90 (DATE) placed a 5/8"Ø iron over 1 3/4" iron.

SKETCH OF REFERENCE TIES

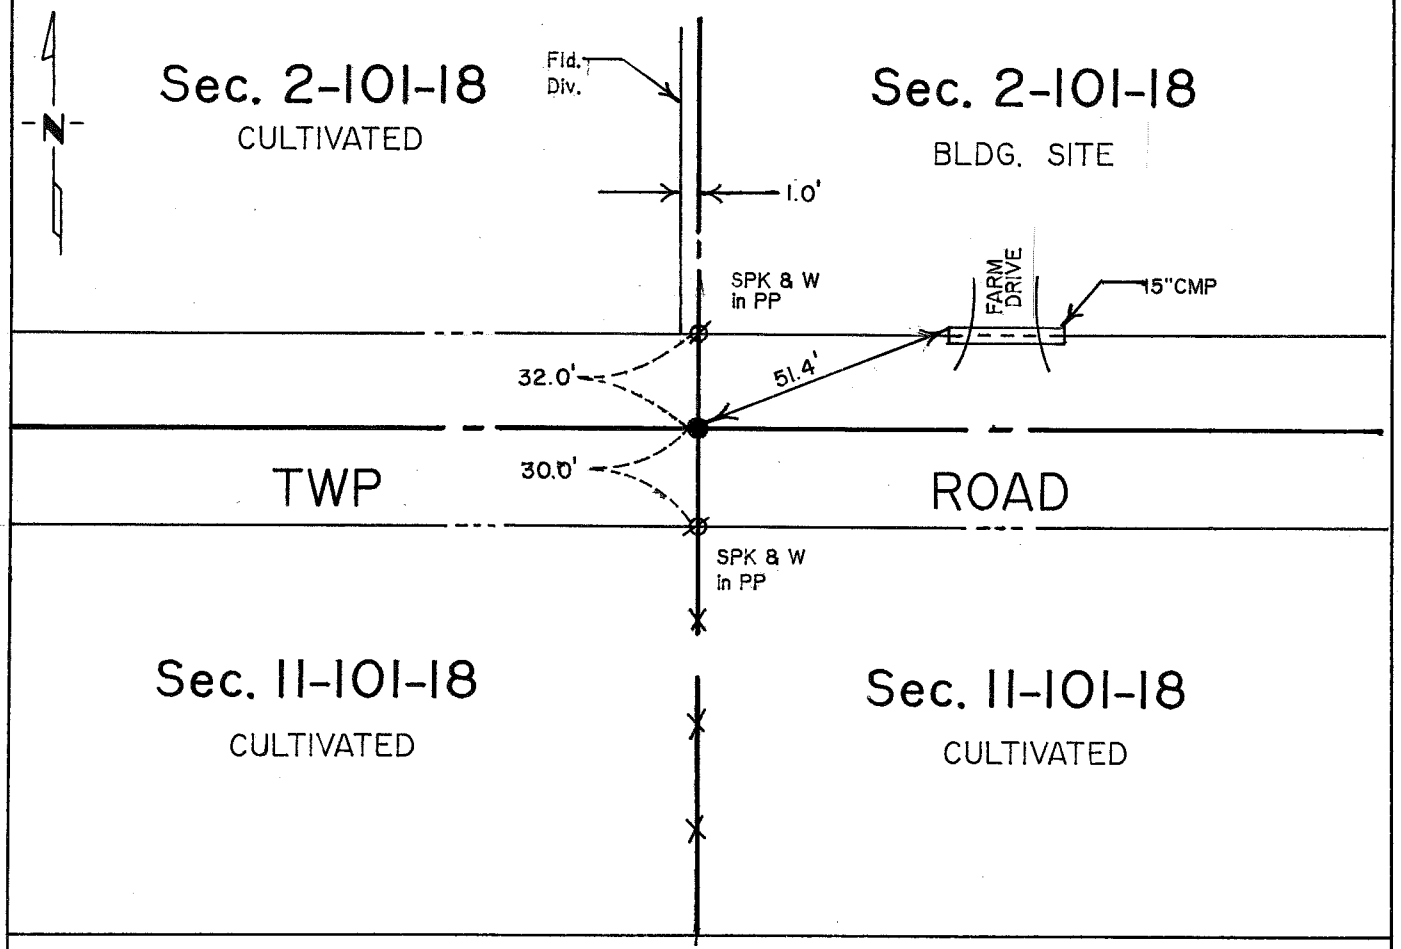

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-19-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/2 corner Sec 2-101-18

1854 This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and a trench.

1990 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith Inc crew dug with a jackhammer on centerline of east-west road with fence line south and 1.0 feet west of a field division north. Found a 1 3/4" square iron 2.5 feet below road surface. Placed a 5/8" diameter iron capped RLS 13807 over 1 3/4" iron.

The monument found fits occupation and road centerline within the section and is accepted as the best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.