Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 15, Township 101N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a 3/4"Ø x 24" capped pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a cast iron monument at location of 3/4"Ø pipe

SKETCH OF REFERENCE TIES

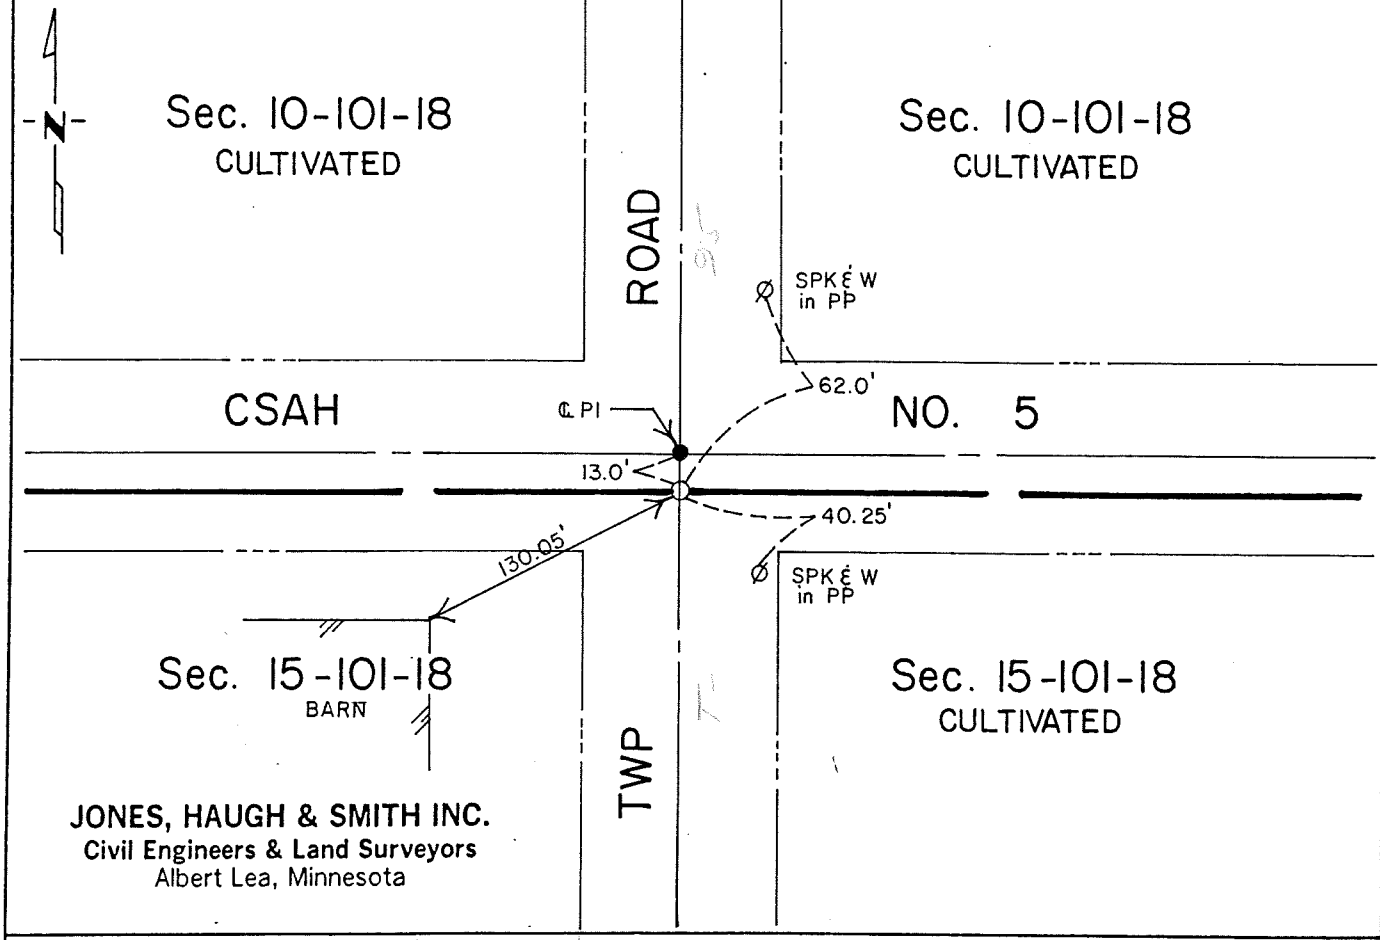

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-23-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 15-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	N 43°W	130 links (85.80 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1922 Recorded in Book "A" in the office of the Mower County Engineer shows a corner inplace and the following ties were taken:

County Road centerline PI	13.0' North
FP 55.2 N 45°E	
FP 52.2 N 48 1/2°W	
TP 49.5 S 23°W	
Concrete FP 40.8 S 53°E	

1926 Grading Plan on County State Aid Highway #5 shows monument 13.0 feet south of the centerline PI.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the Mower County backhoe on centerline centerline of N-S-E-W roads in line for centerline PI and uncovered a 1/2" diameter iron over a 6" diameter concrete monument with a 1/2" diameter iron cast in center. Left monument as found and placed a 5/8" diameter x 18" iron capped over monument. We then excavated 13 feet south of this monument and uncovered a 3/4" diameter pipe capped RJO 11009. Removed pipe and continued digging. No further evidence was found of the public land survey corner.

The monument agrees with past records and fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.