Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township T10IN, Range R18W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-31-94 (DATE) found a CON. MON. WITH A 5/8"ø IRON STICKING UP 1". 2' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-31-94 (DATE) placed a CAST IRON MON. OVER CON. MON. FLUSH WITH ROAD SURFACE.

SKETCH OF REFERENCE TIES

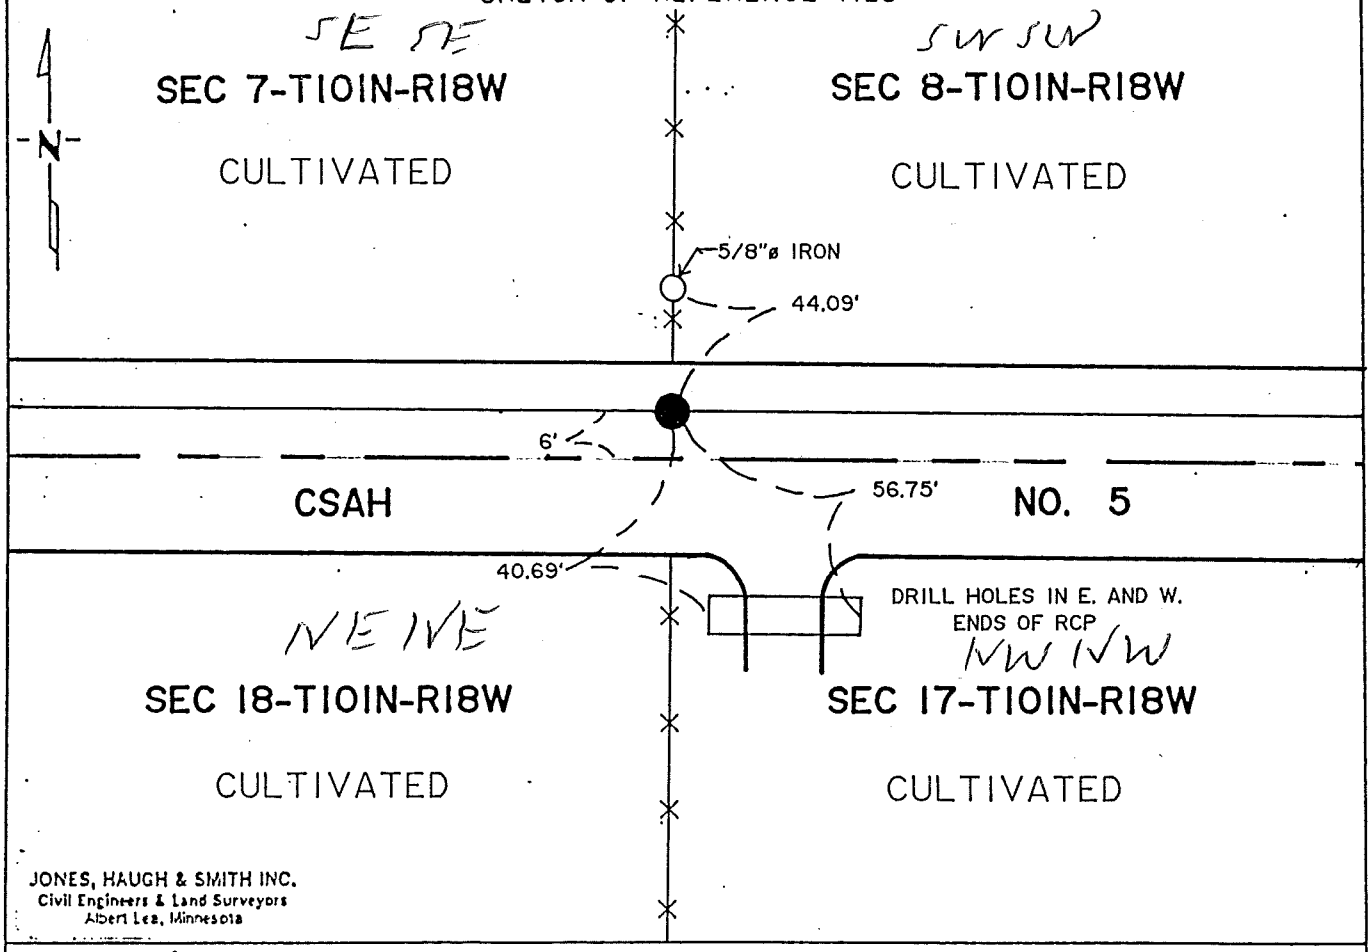

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 9-8-94 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 13 day of Sept A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431918

Bk 84 Misc Pg. 435

M.H.D. FORM NO. 2105

BOOK 84 PAGE 435

STATEMENT OF EVIDENCE

NE corner Section 18-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.

Mower County Highway Department grading plans show a concrete monument at the corner six feet north of centerline of CSAH No. 5.

1994 Jones, Haugh & Smith crew dug a trench at the corner location with a backhoe. A concrete monument was found 2 feet below the road surface. The concrete monument has been used to mark the corner location for over 40 years and has been perpetuated by other surveyors.

The concrete monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 84 PAGE 436