Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a 3/4 ø x 28" pipe capped RLS 10162

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a Cast iron monument over pipe

SKETCH OF REFERENCE TIES

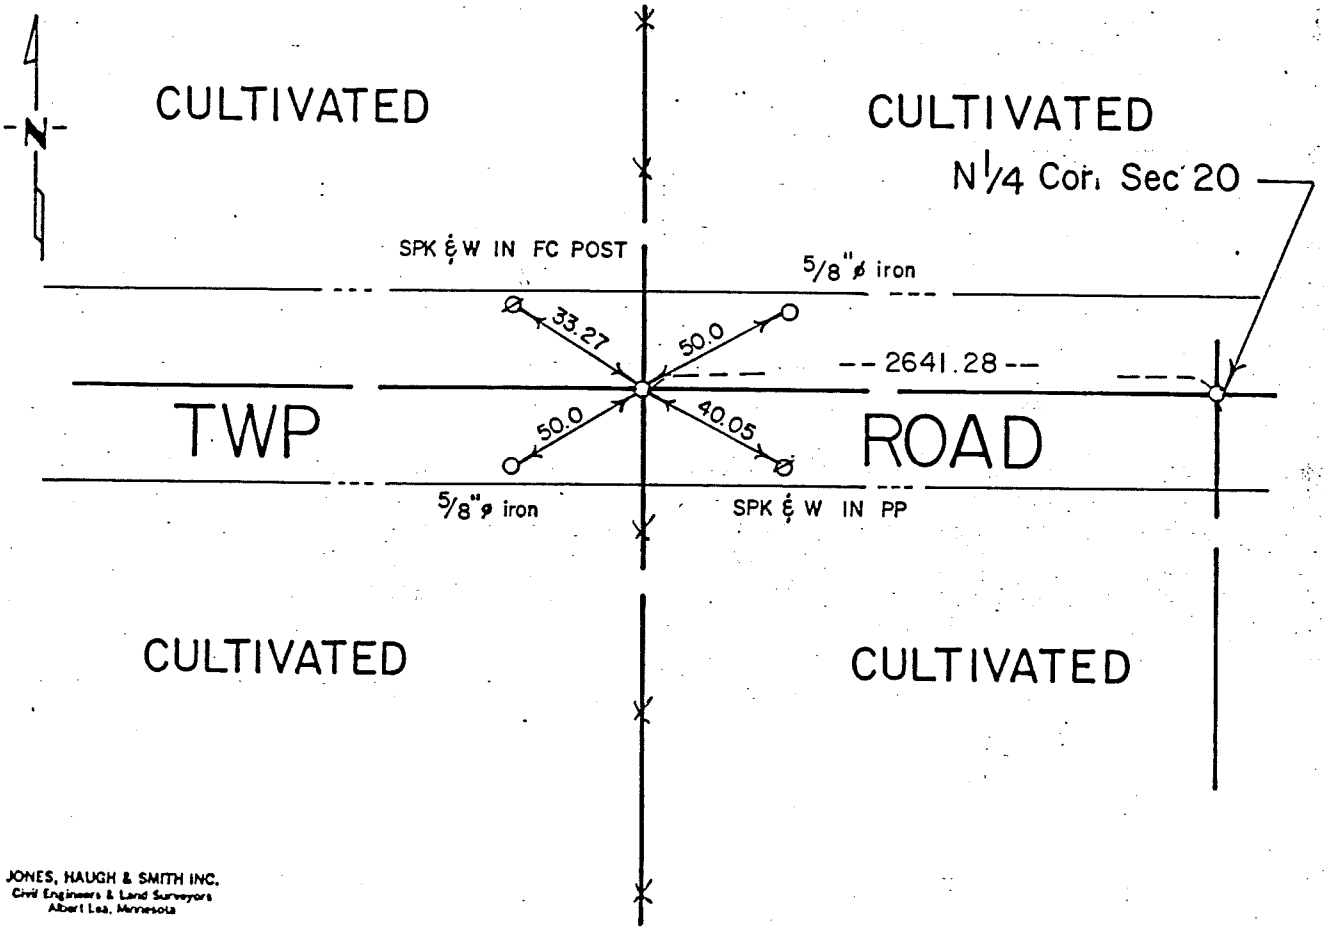

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-23-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 20-101-18

This corner was original established by Deputy Surveyor Wm. I. Anderson of the US General Land Office in 1854. The government notes show a wood post was set and a mound of earth was raised.

The following were contacted for section corner information:
Mower County Engineering Dept
Mower County Recorder's Office
Minnesota Department of Natural Resources
Minnesota Department of Transportation
Yaggy, Colby & Associates

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Yaggy, Colby & Associates found no evidence of public land survey corner. Therefore set a 3/4" x 24" long capped RLS 10162 pipe on centerline of east-west road in line with fence north and south.

1990 Jones, Haugh & Smith Inc personnel uncovered 3/4" capped pipe during survey in NE 1/4 of Section 20.

1992 Jones, Haugh & Smith Inc personnel under the direction of John Schulte IV, dug with the Mower County backhoe at the location of 3/4" capped pipe. A 5'x12'x4' deep hole and found no further evidence. Accepted 3/4" pipe as best evidence and set a cast iron monument over 3/4" pipe 0.5 feet below road surface.

The monument found fits occupation and road centerline and has been accepted by area surveyors as best evidence.