Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 25, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a ROTTED WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

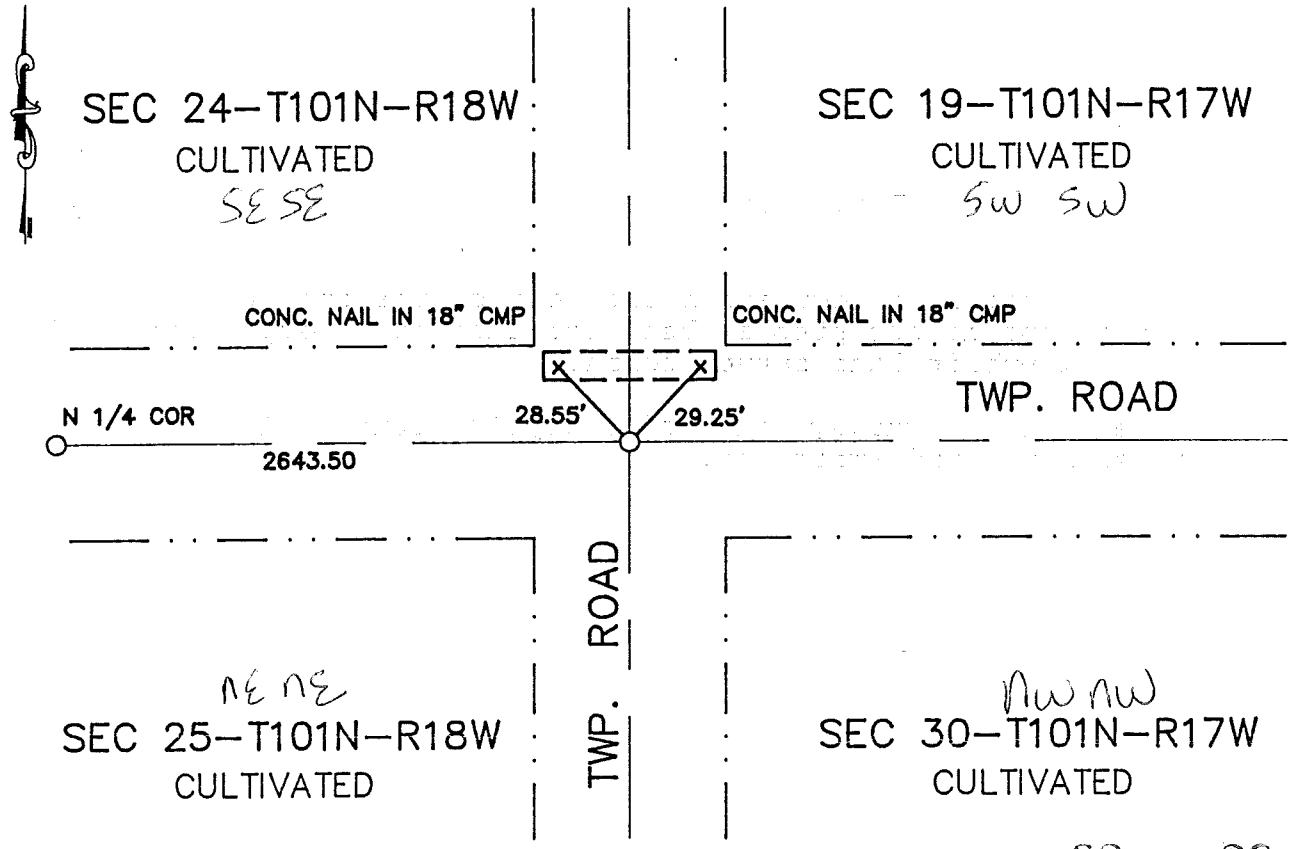

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 36

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446680

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 A.M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Sharyle Dayton, Deputy

DOCUMENT NO 446680

M.H.D. FORM NO. 2105

Book 92 Page 36 Misc

NE Cor SEC 25-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and N-S and uncovered a 6" spike 1.5' deep in old road bed. Dug by hand below spike and uncovered a rotted wood stake 1' long. Continued digging and found no other evidence of the original PLS corner. Accepted spike and wood stake found as a perpetuation of original PLS corner. Placed a cast iron monument over spike and stake 4" below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.