Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 101N Range 18W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 01/29/1974 (DATE) found a 3/4" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/14/1995 (DATE) placed a CAST IRON MONUMENT OVER 3/4" IRON

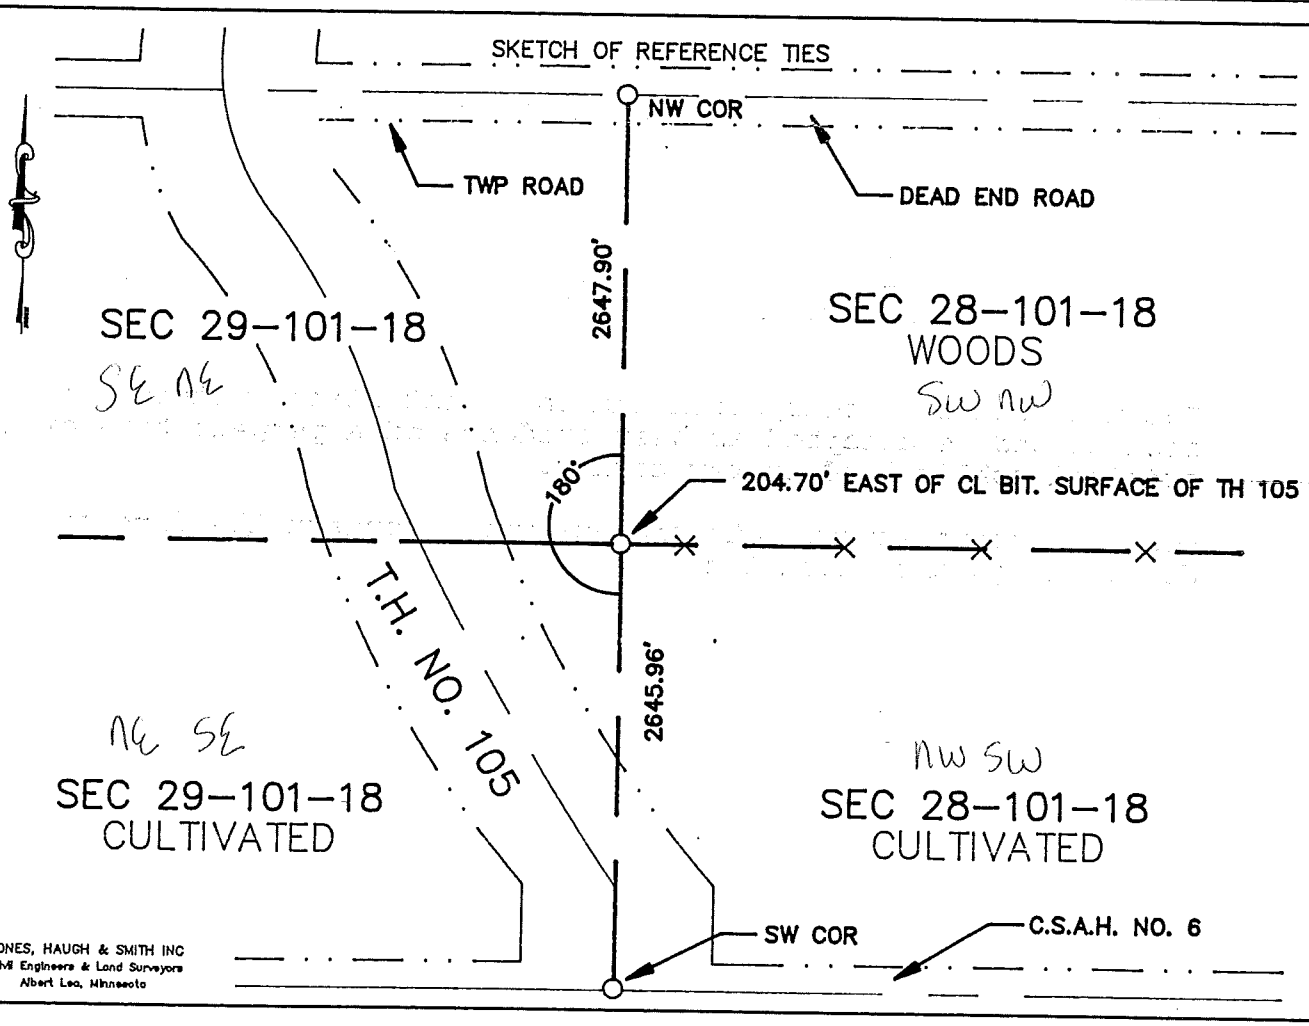

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE

7-19-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 446546

M.H.D. FORM NO. 2105 BOOK 91 PAGE 554

Book 91 Misc Page 554

W 1/4 Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1974 Jones Haugh and Smith found a 3/4" iron at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a 3/4" iron in fence line which agreed with the monument found in 1974. Placed a cast iron monument above iron found at ground level.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.