Index No. p. 55, "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a 5/8"ø IRON x 3" LONG, CONTINUED DIGGING AND FOUND 6"x8"x10" POINTED STONE OVER 8"x15" POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

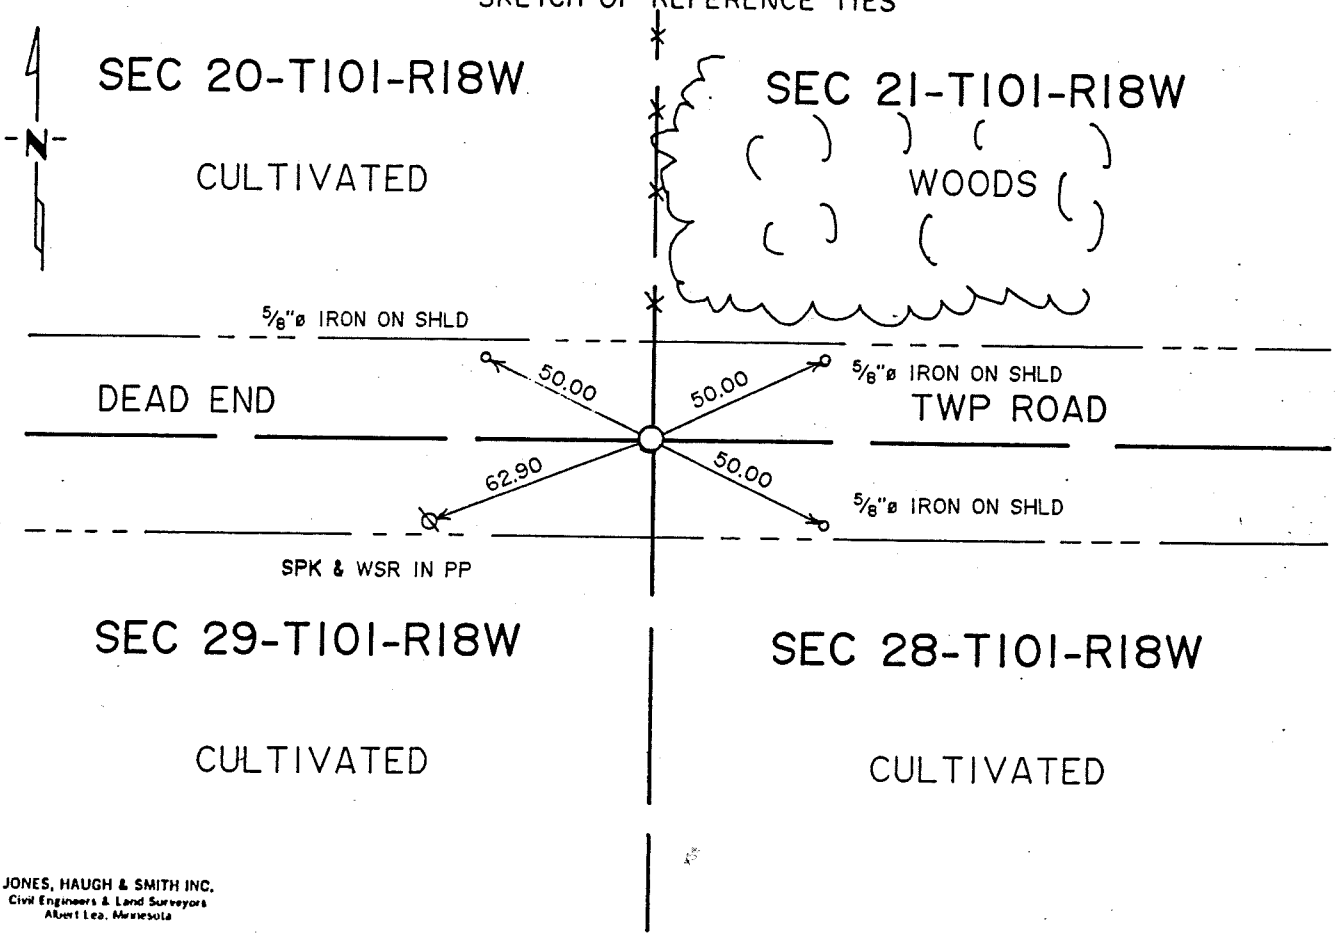

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 20-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1891 Clausen notes indicate a stone monument inplace at the northwest corner of Section 28-101-18.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe and uncovered a 5/8" diameter iron x 3" long iron lying flat 2" deep. Continued digging and found a 6"x8"x10" pointed stone over a 8"x13" pointed field stone two feet deep in virgin soil. Set cast iron monument on east side of stones, 6" below road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.