Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a REMAINS OF WOOD POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

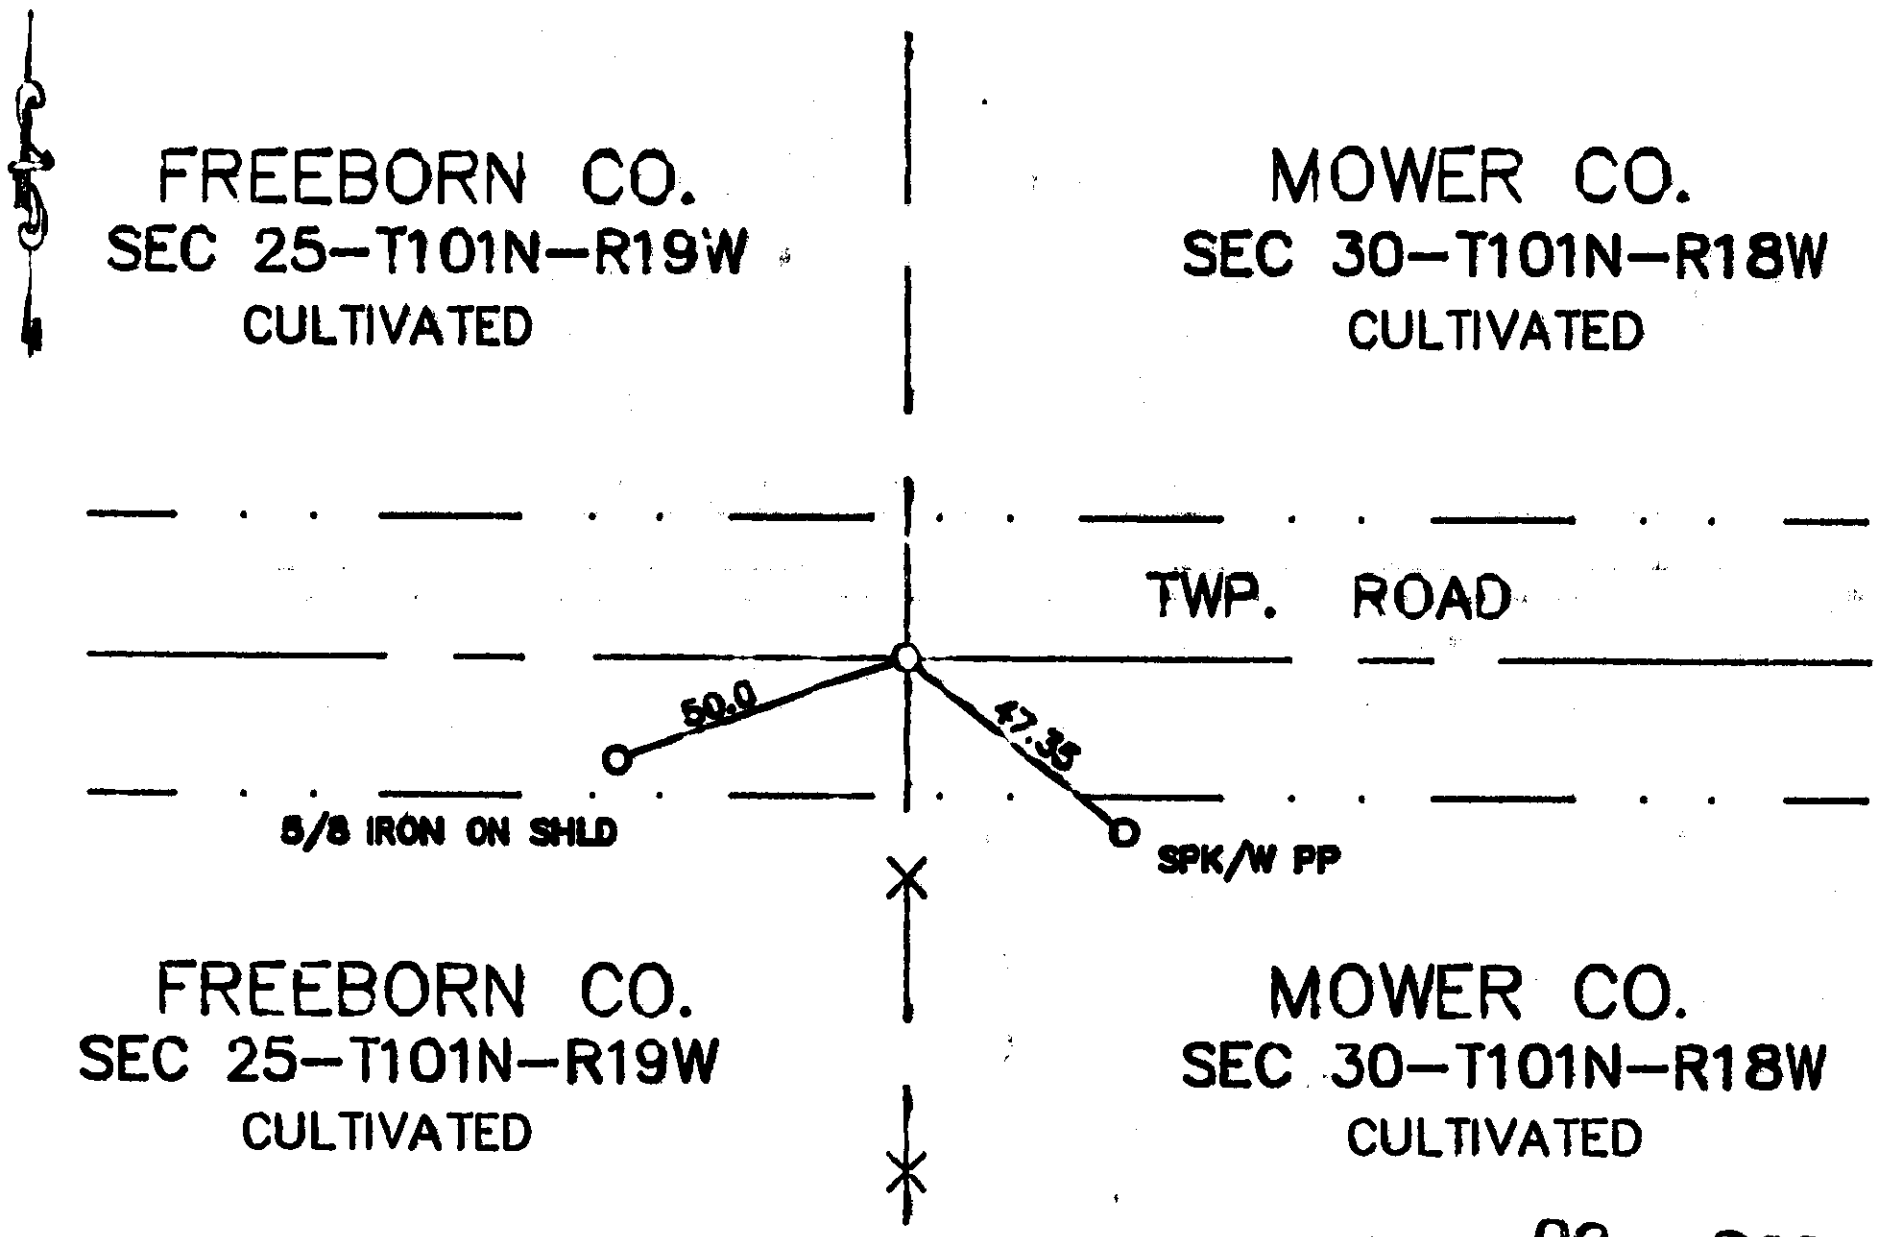

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 269

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charlene Enger

By Susan M. Hayes, Deputy

DOCUMENT NO. 455352

M.H.D. FORM NO. 2105

Book 96 Misc Page 269

W 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 18807, dug with county backhoe at the CL of township road E-W and in line with line fence south. Uncovered a 1"x2" wood stake. Continued digging and uncovered the remains of an old wood post 2' deep in virgin soil. Placed a cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a 1" PIPE OVER A WOODEN STAKE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

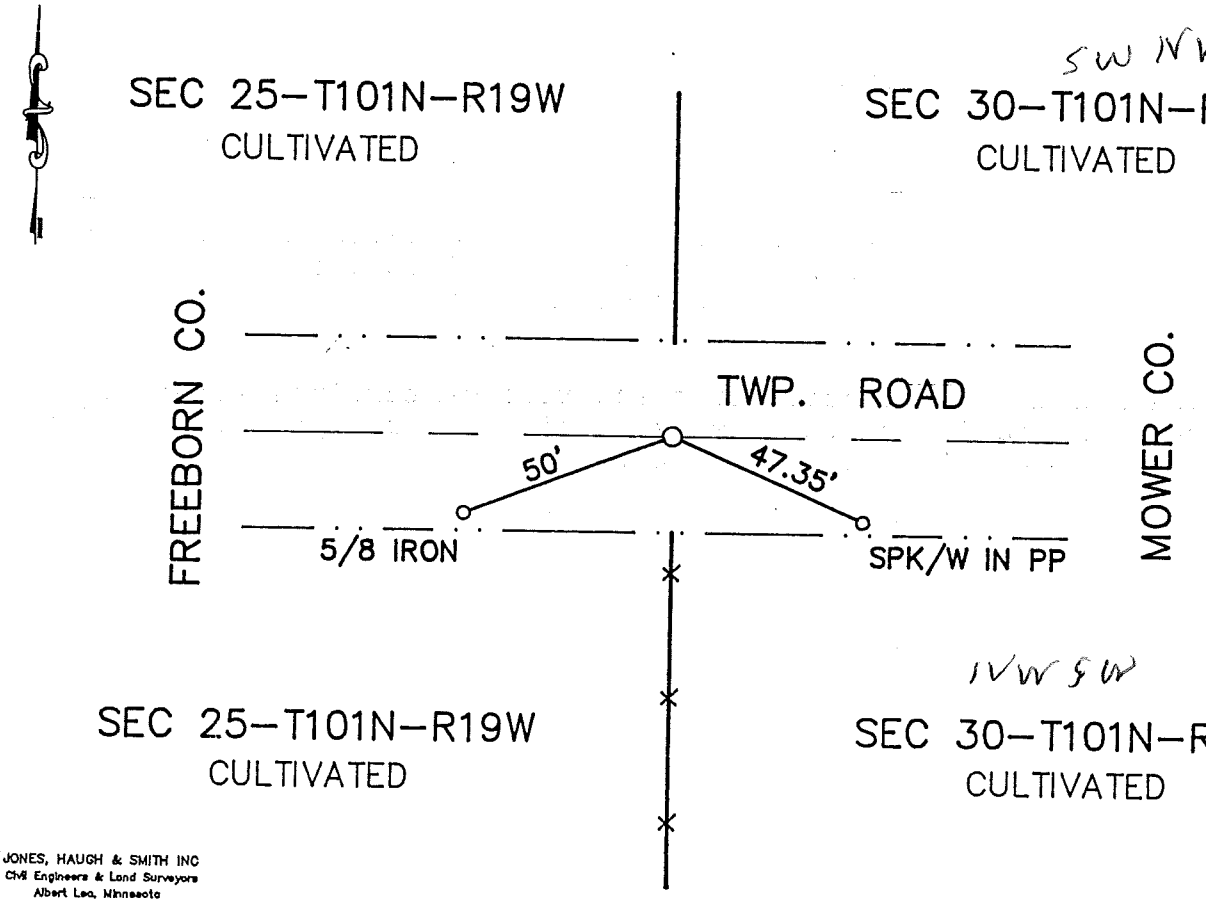

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446232

I hereby certify that this document was filed in the County Rec. office at 1 P.M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engel

By Cheryl L Taylor, Deputy

DOCUMENT NO. 446232

M.H.D. FORM NO. 2105

BOOK 91 Page 486 BOOK 91 PAGE 486

W 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor Hardin Nowlin of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township E-W and in line with line fence south. Uncovered a 1" pipe over a 1"x2' wood stake. Continued digging and found the remains of an old wood post in virgin soil. Placed a cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.