Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 31, Township 101, Range 18, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a CAST IRON MONUMENT DOWN 18"

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

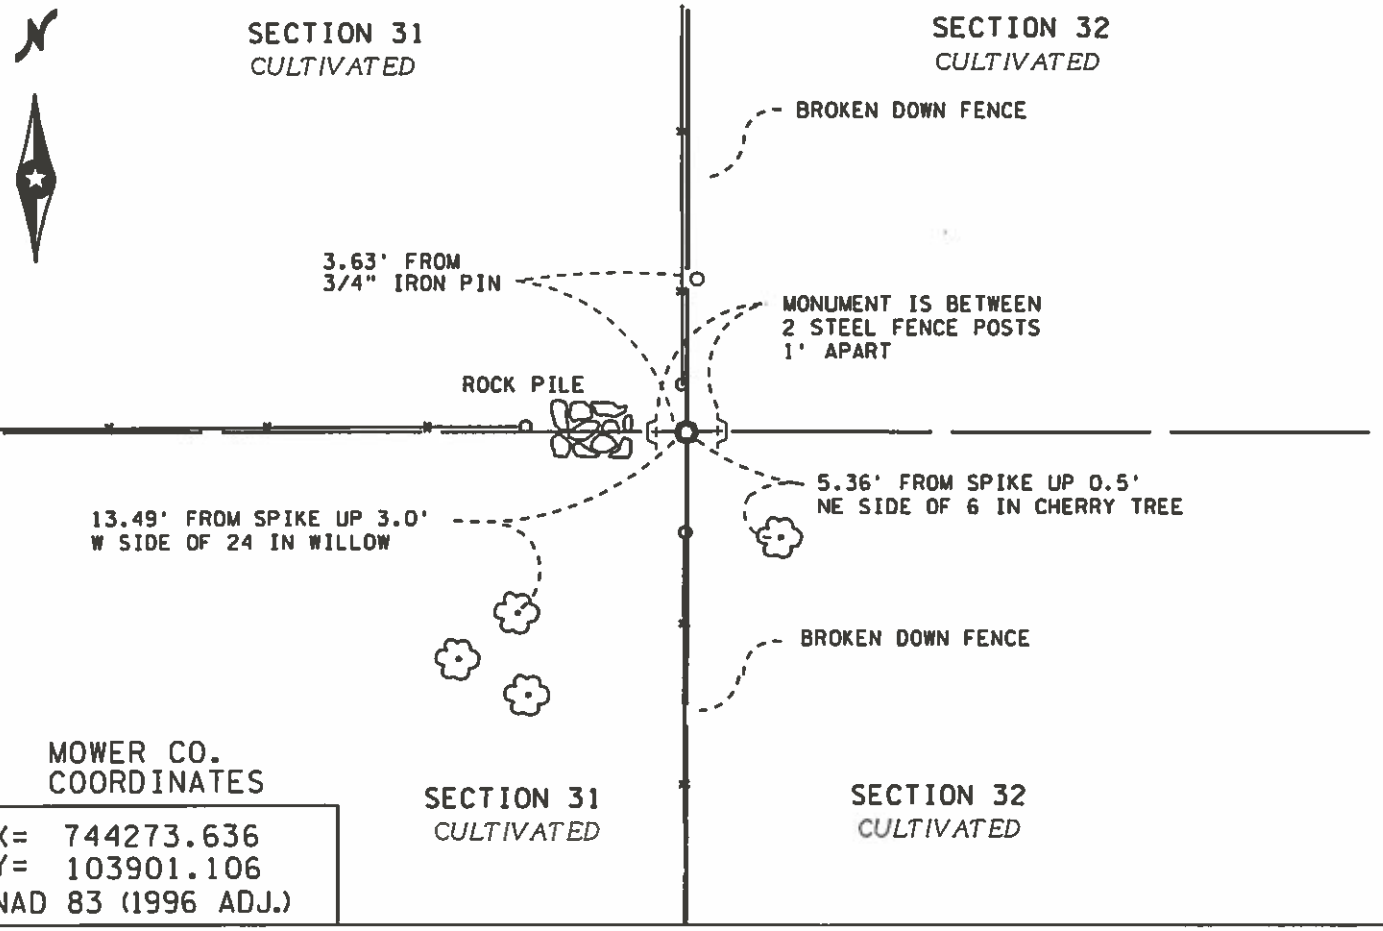

MOWER CO. COORDINATES

X= 744273.636
Y= 103901.106
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Briggs (SIGNATURE) 7-27-09 (DATE)

License No. 21199

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of MOWER

I hereby certify that this document was filed in the Co. Recorder's office at _____ .M. on the _____ day of _____ A.D., 20 _____

RECEIVED JUL 27 2009

County Recorder _____

By _____, Deputy

BY: _____

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 31, TOWNSHIP 101N, RANGE 18W, 5P.M.

1854	This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench
October 1997	Jones, Haugh & Smith Inc contacted the following for section corner information: Mower County Highway Dept. Mower County Recorder Tucker Land Surveying
1987	Jones, Haugh & Smith crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and located the remains of a wood corner fence post. Found no other evidence of original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

April 28, 2009	Mike Hendrickson working for MnDot , found a cast iron monument, down 18 inches. New reference ties were made.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/17/1997 (DATE) found a REMAINS OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/17/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

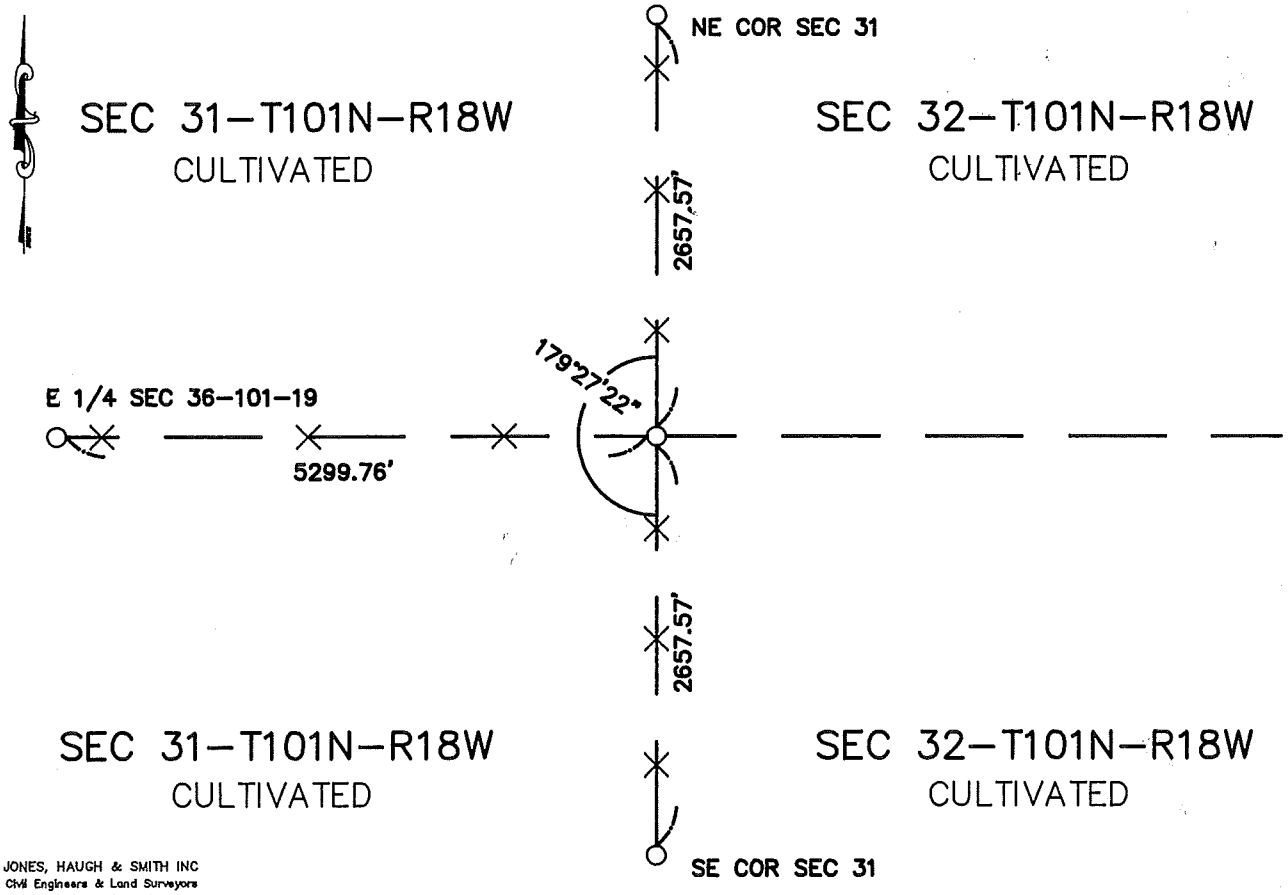

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-10-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and located the remains of a wood corner fence post. Found no other evidence of original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.