Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a LARGE STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

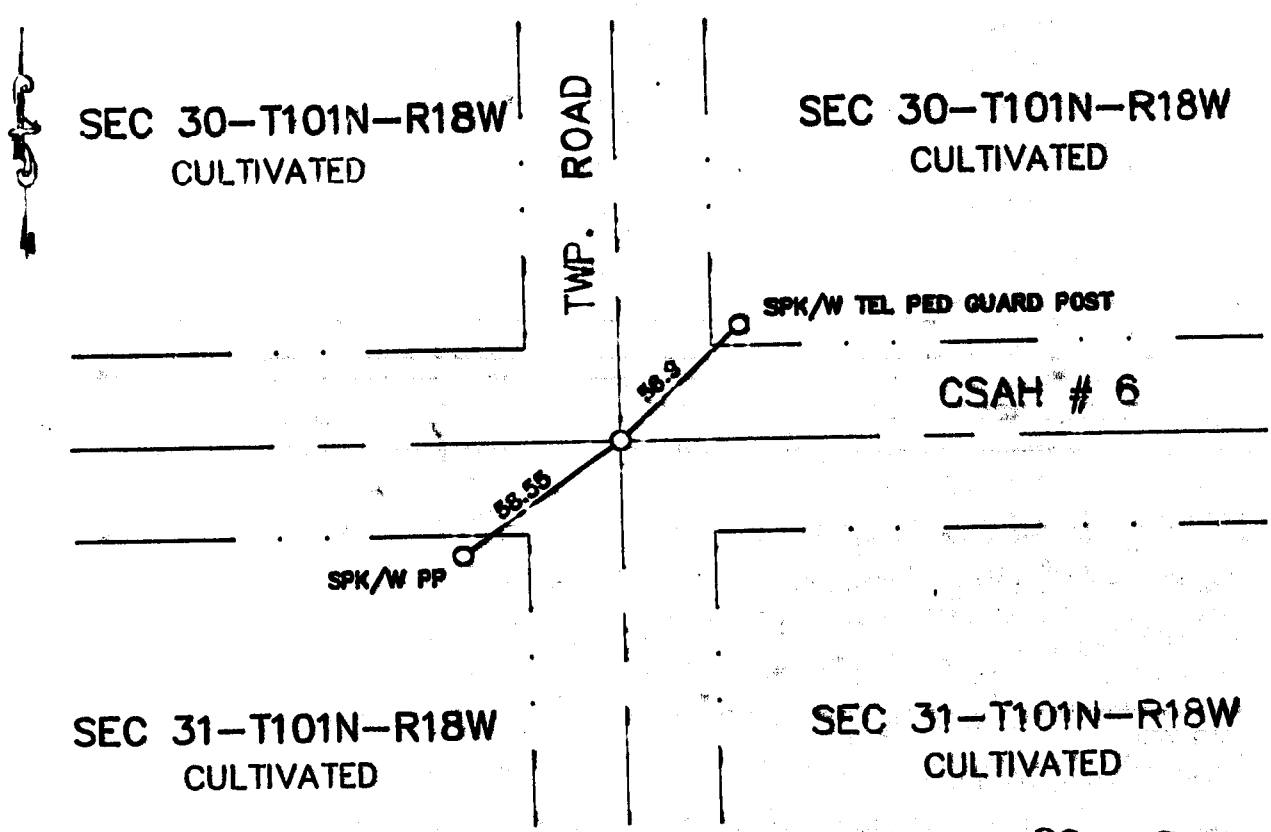

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 267

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Engel

By Susan M. Davis, Deputy

DOCUMENT NO. 456951

M.H.D. FORM NO. 2105

Book 96 Misc Page 267

S 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department records show a corner at this location.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the intersection of township road N-S and CSAH No. 6. Uncovered a 3" diameter aluminum monument on a 3/4" iron 0.5" deep. Continued digging and found a 6" diameter concrete monument with a 1/2" iron cast in the center over a large stone 3' deep in virgin soil. Left concrete monument and set a cast iron monument at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a LARGE STONE 3' DEEP IN VIRGIN SOIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

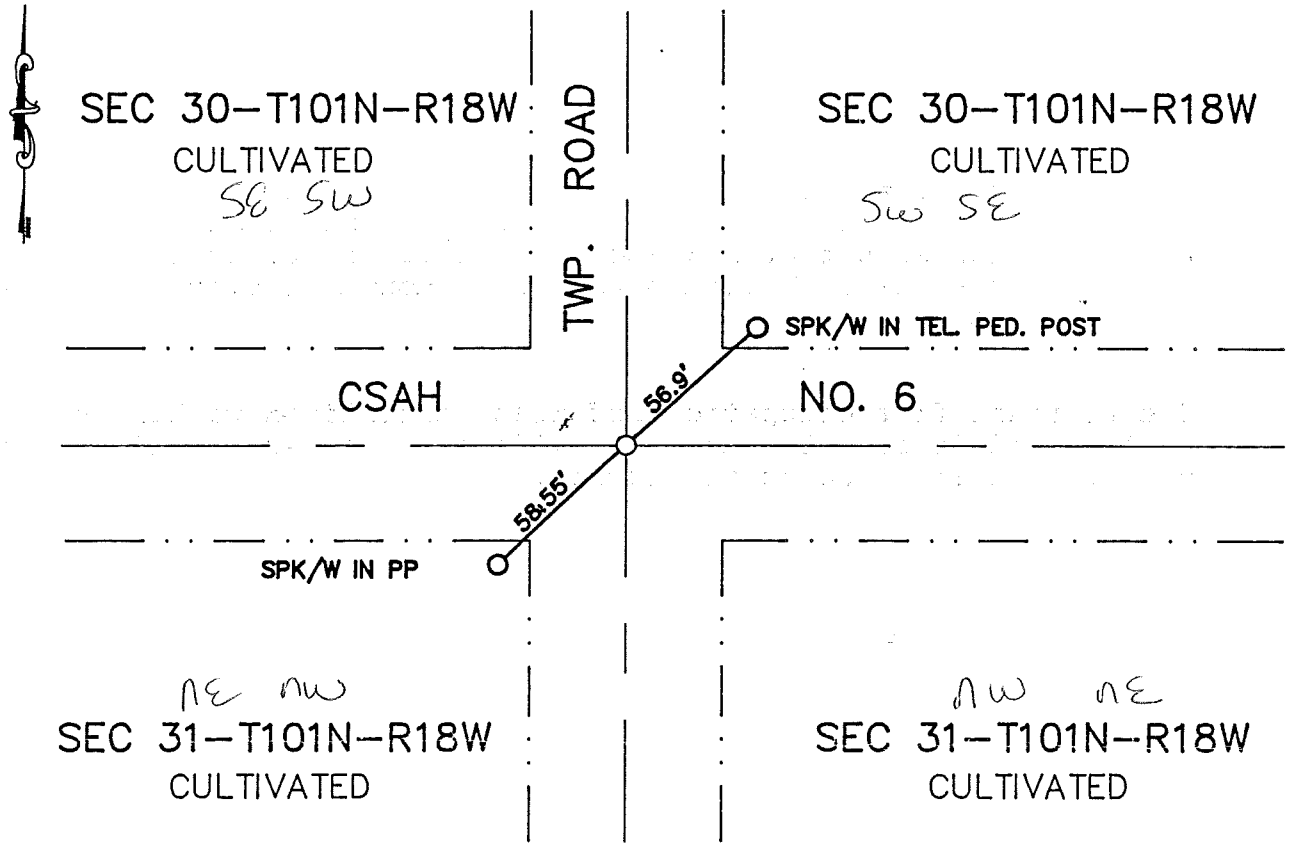

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 558

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-19-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 446548

M.H.D. FORM NO. 2105

Book 91 Misc Page 558

S 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor Hardin Nowlin of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL twp. road and CSAH 6. Found a 3" diameter aluminum monument on a 3/4" iron .5' deep. Continued digging and found a conc. monument over a large stone in virgin soil. Accepted stone as original corner and placed a CIM at the surface.

The mornnument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.