Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 31, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a Rod with Plastic Cap, Flush.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

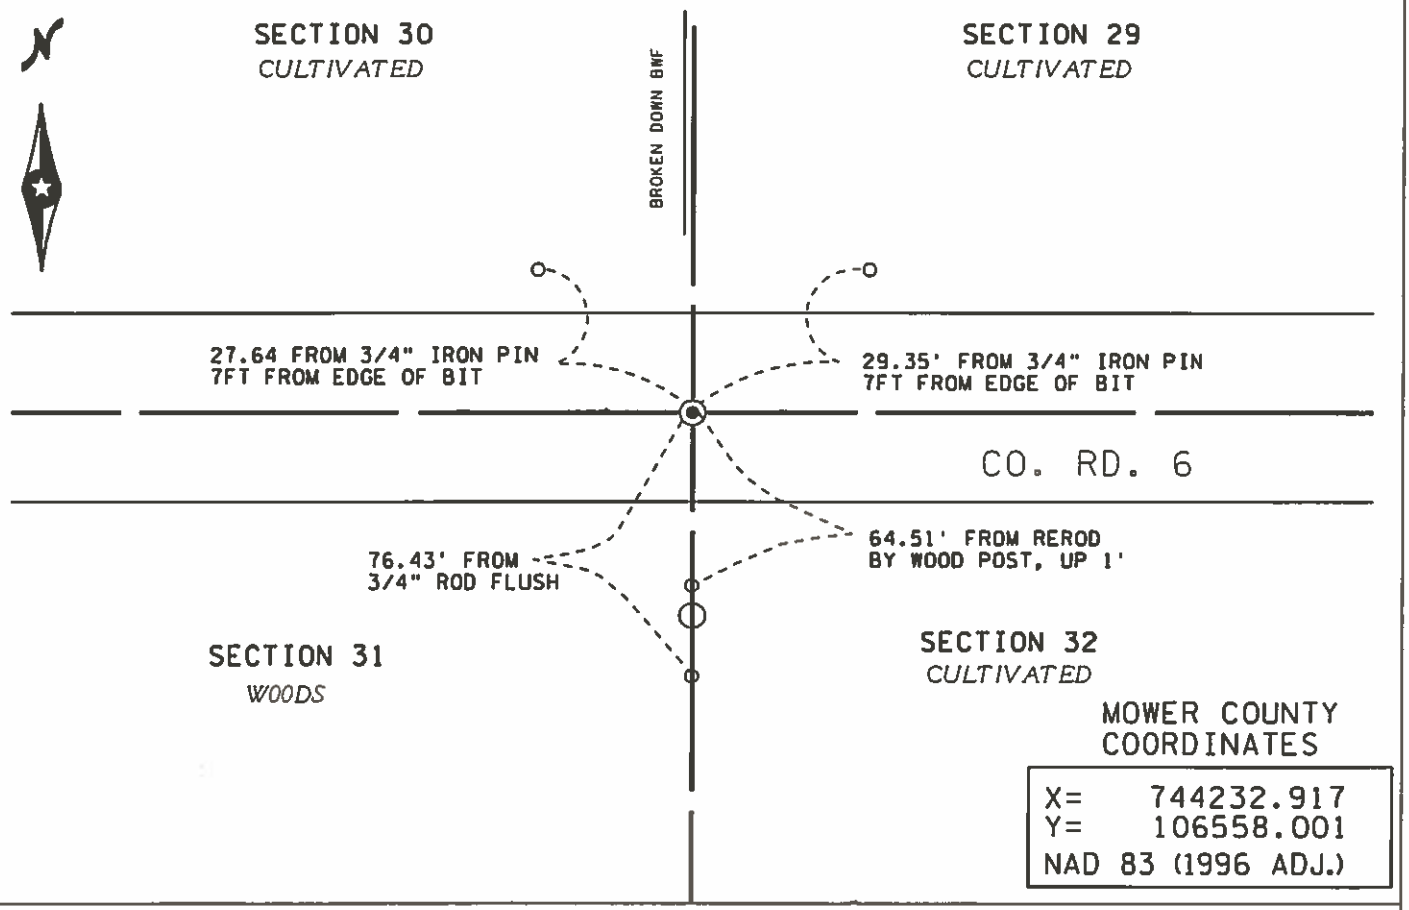

MOWER COUNTY COORDINATES

X= 744232.917
Y= 106558.001
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Griggs — SIGNATURE — 7-27-09 — DATE

License No. 21199

☒ Land Surveyor ☐ Professional Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorder's office at _____ .M. on the ____ day of _____ A.D., 20 ___

RECEIVED JUL 27 2009

County Recorder _____

By _____, Deputy

BY: _____

DOCUMENT NO. _____

Statement of Evidence:

NORTHEAST CORNER OF SECTION 31, TOWNSHIP 101N, RANGE 18W, 5 P. M.

1854 to 1997	History is as shown on John H. Schulte Certificate of Location recorded September 10, 1997 as Document 455998.
March12, 2003	Dean Aarre, MNDOT crew chief, found a rod with a plastic cap, flush with the surface of the road. The reference ties were updated. The monument was left as found.
April 28, 2009	Dave Griggs, Mndot surveyor, found the rod with a plastic cap, flush with the road surface. Additional Reference ties were made.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/04/1991 (DATE) found a CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/04/1991 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

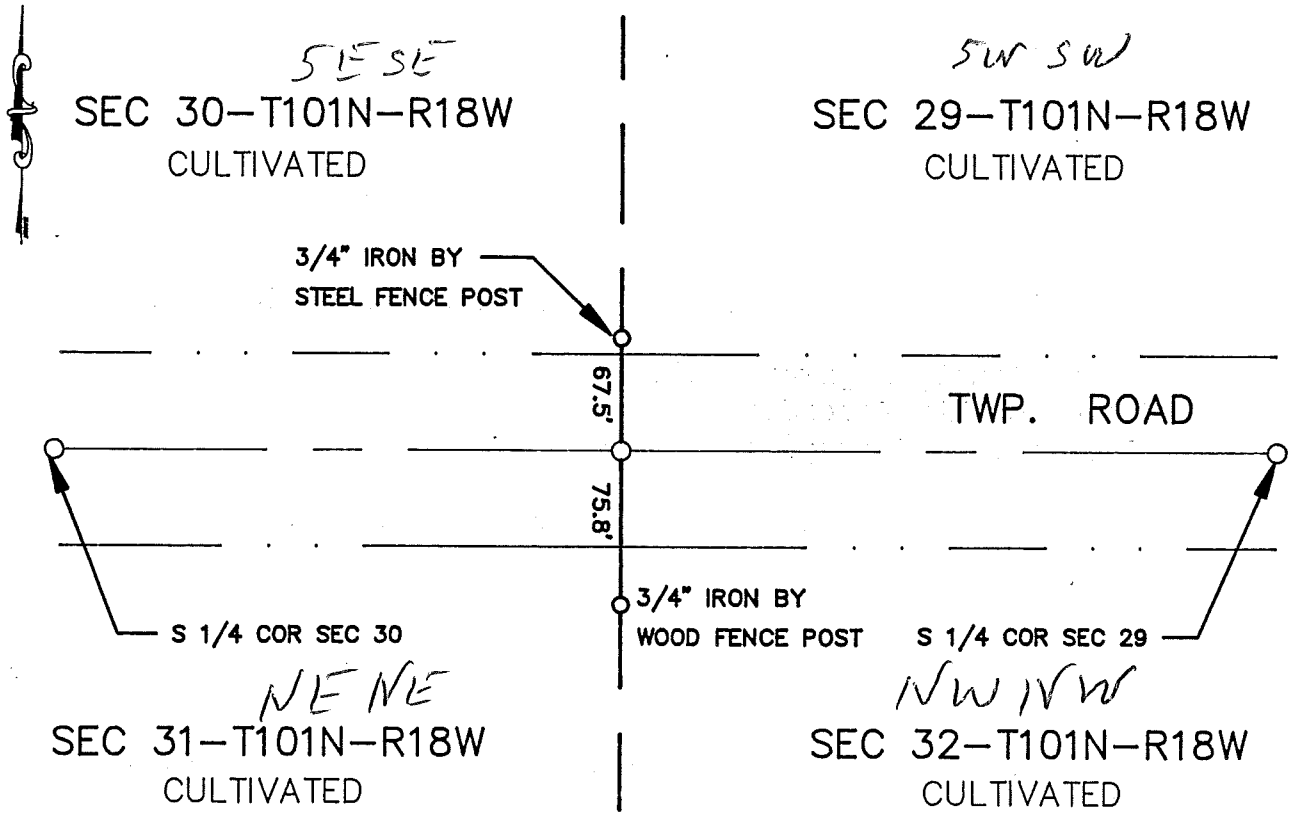

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 287

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 455998

M.H.D. FORM NO. 2105

Book 96 Misc Page 287

SW Cor SEC 29-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower Hwy Dept records indicate a concrete monument at this location.

1976 Jones Haugh and Smith crew found a 1/2" iron in concrete using magnetic locator, which agreed with ties by Mower County.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 and located a concrete monument.

1997 Jones Haugh and Smith crew dug by hand and located concrete monument and set a 5/8" iron over monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.