Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTHEAST Corner of Section 31, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a Cast Iron Monument, Down 0.3 feet.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

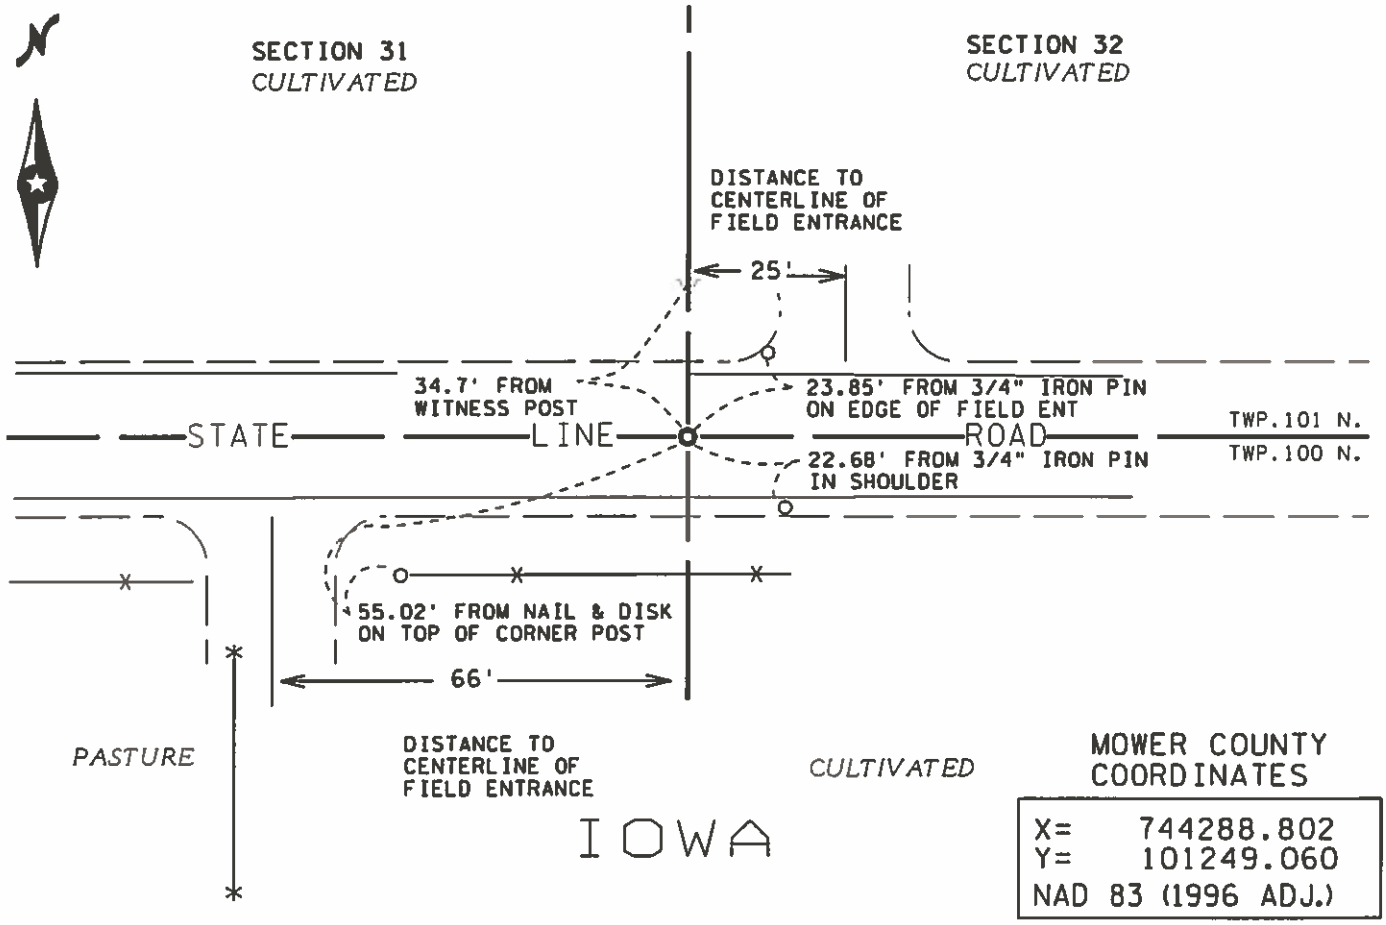

MOWER COUNTY COORDINATES

X= 744288.802
Y= 101249.060
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Griggs (SIGNATURE) 7-27-09 (DATE)

License No. 21199

☒ Land Surveyor ☐ Professional Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorder's office at _____ .M. on the ____ day of _____ A.D., 20 ___

RECEIVED JUL 27 2009

County Recorder _____

By _____, Deputy

BY: _____

DOCUMENT NO. _____

Statement of Evidence:

SOUTHEAST CORNER OF SECTION 31, TOWNSHIP 101N, RANGE 18W, 5P.M.

1854 to 1997	History is as shown on John H. Schulte Certificate of Location recorded September 8, 1997 as Document 455956.
Dec.10, 2002	Mndot survey crew chief Dean Aarre found cast iron monument down 0.3 feet. Reference ties were updated.
April 28, 2009	Dave Griggs, Mndot surveyor, found the cast iron monument 0.4 foot below the road surface. Reference ties checked and found to be okay.
	The cast iron monument is accepted as the best evidence of the public land survey corner.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a 2'X1 1/2' ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

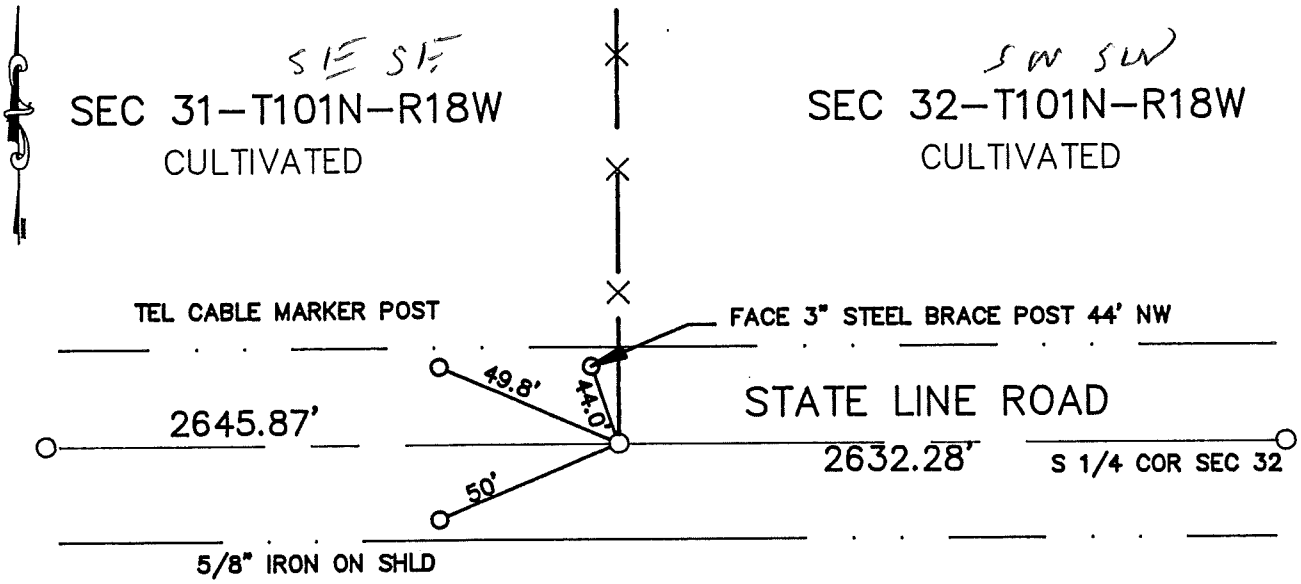

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 277

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455956

M.H.D. FORM NO. 2105

Book 96 Misc Page 277

SW Cor SEC 32-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of State Line Road. Uncovered a 2'x1 1/2' rock 2' below road surface. Placed a 5/8" iron capped 13807 on the west side of stone found. Placed a cast iron monument over stone 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.