Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a LARGE STONE WITH SMALL STONES SURROUNDING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

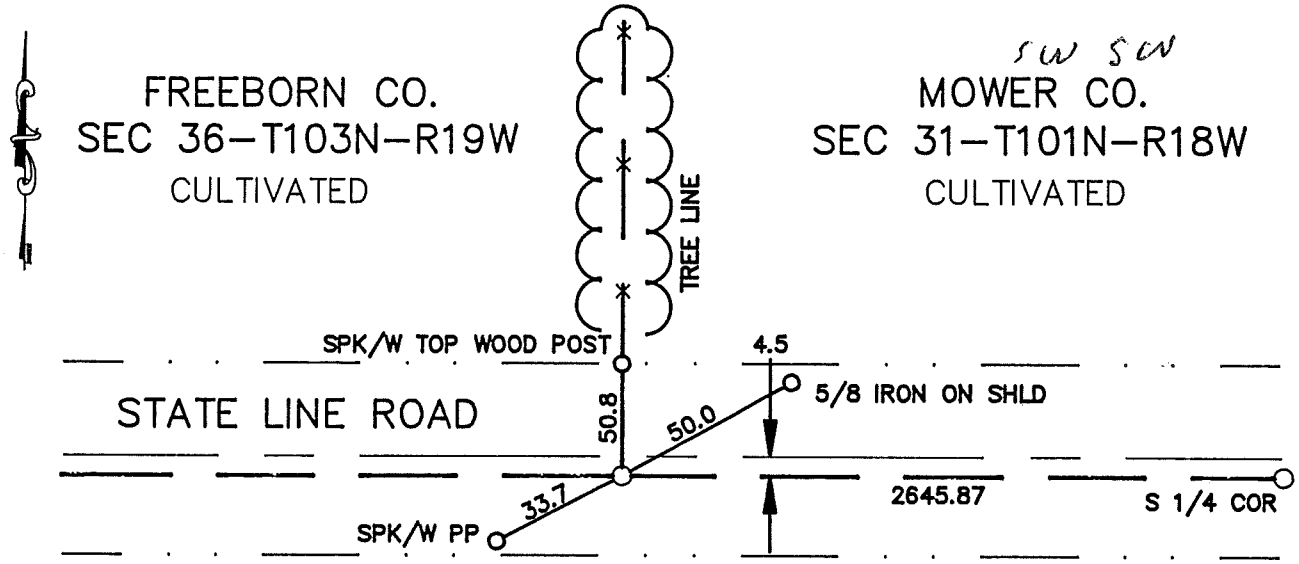

STATE OF IOWA

BLDG SITE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 275

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455955

M.H.D. FORM NO. 2105

Book 96 Misc Page 275

SW Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Freeborn County Highway Department
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

John Nielsen records state he uncovered a rock with smaller rock around 2.3' north of Iowa section line and 4'+/- north of road shoulder.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of road and in line with line fence north. Uncovered rock with smaller ones around it. Rock fit line fence north and was 5.0'+/- north of south shoulder. Placed a 5/8" iron capped 13807 west of rock. Placed a cast iron monument over rock found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.