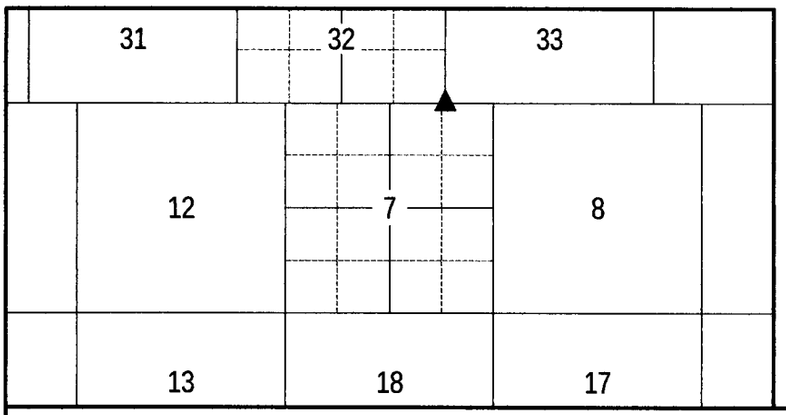


A643895

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 1/23/2019 8:58 AM

PACKAGE: 73847 REC FEE: $0.00

JILL CORDES, Mower County Recorder

UNITED STATES PUBLIC LAND SURVEY CORNER CERTIFICATE

Land Survey Monument situated in Section ***32***, Township ***101*** North, Range ***18*** West of the Fifth Principal Meridian, ***Mower*** County, Minnesota.

Previously recorded in ***Book 96 Page 281*** in the Office of the Mower County Recorder.

(SHOW REASON FOR PREPARING THIS CERTIFICATE, THE EVIDENCE AND DETAILED PROCEDURES USED IN ESTABLISHING THE CORNER POSITIONS AND MONUMENTATION FOUND OR PLACED)

Monument Descriptions and Remarks:


SE CORNER:

Found 4"Ø cast iron monument 0.3' deep n ACC pavement. Said cast iron monument fits remaining ties within reason and is monument of record. After road resurfacing, **set mag nail w/stainless steel washer #21096** in ACC pavement at location of said cast iron monument.

This certificate is being prepared because monumentation has changed due to road resurfacing.

PLAN VIEW

(SHOW A MINIMUM OF THREE REFERENCE TIES TO DURABLE PHYSICAL OBJECTS, RELEVANT MONUMENTS AND PHYSICAL CONDITIONS THAT WILL ENABLE RECOVERY OF THE CORNER)

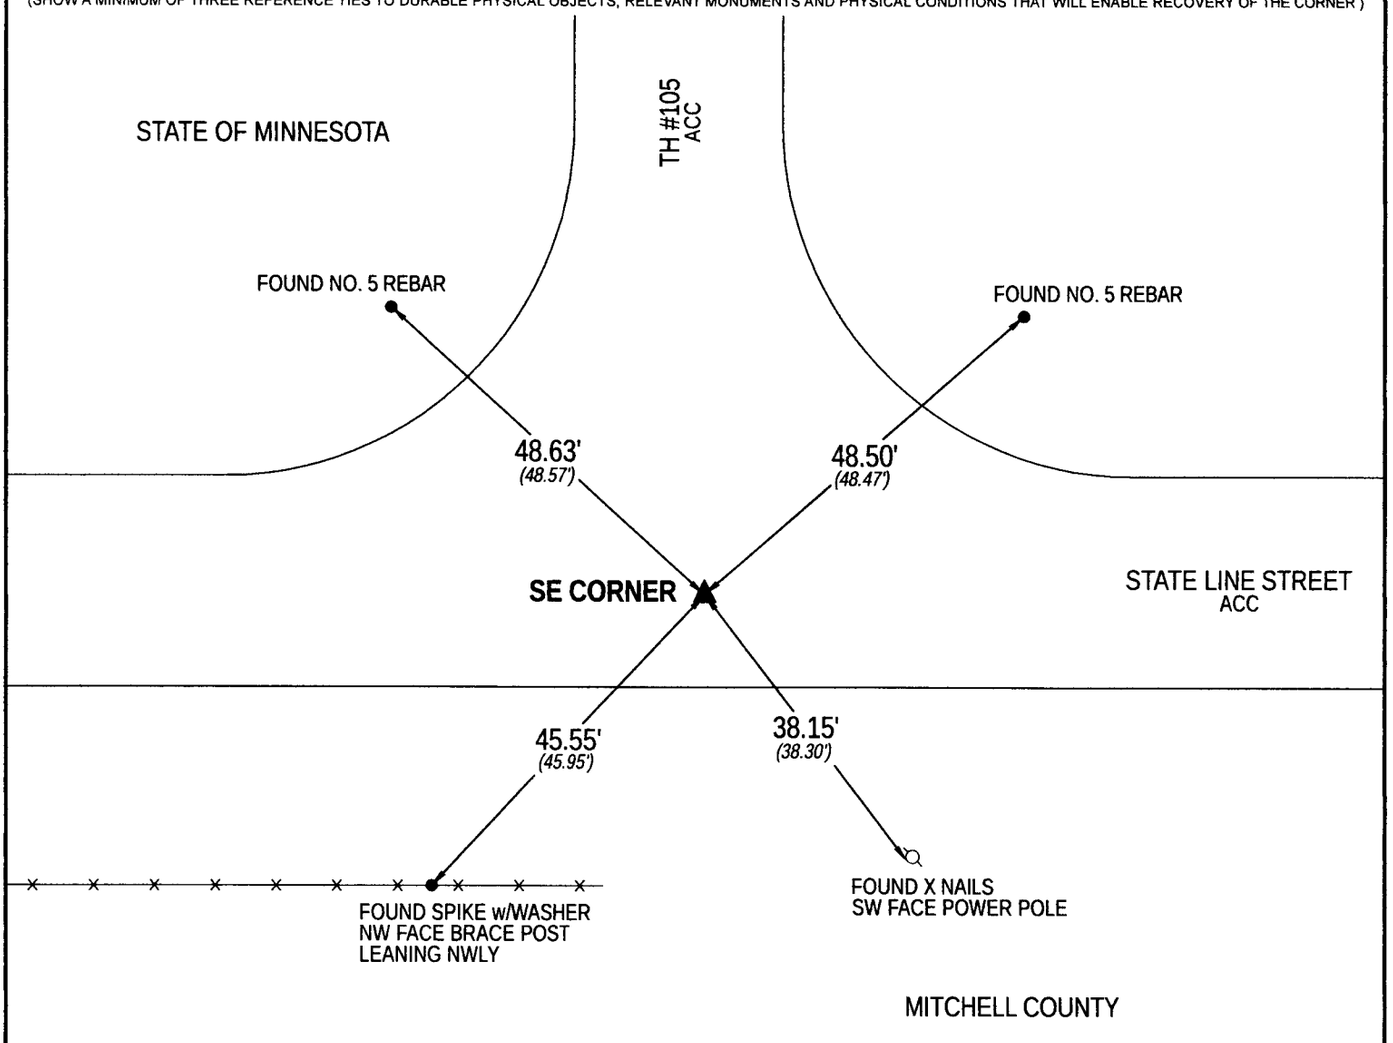

PROFESSIONAL LAND SURVEYOR
TED C. HOODJER
21096
IOWA

I hereby certify that this land surveying document was prepared and the related survey work was performed by me or under my direct personal supervision and that I am a duly licensed Land Surveyor under the laws of the State of Iowa.

TED C. HOODJER
License Number 21096
My license renewal date is December 31, 2019.
All Pages or sheets are covered by this seal except:

12/27/2018
DATE

LIST CORNERS TO BE INDEXED	
CORNER	SEC-TWP-RNG
SE	32-101-18

HEARTLAND ASPHALT, INC.
2601 S. Federal Avenue
Mason City, Iowa 50401
Phone: 641-424-1733
Fax: 641-424-0334

JOB NO. 75281

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a PK NAIL OVER DRILL BIT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

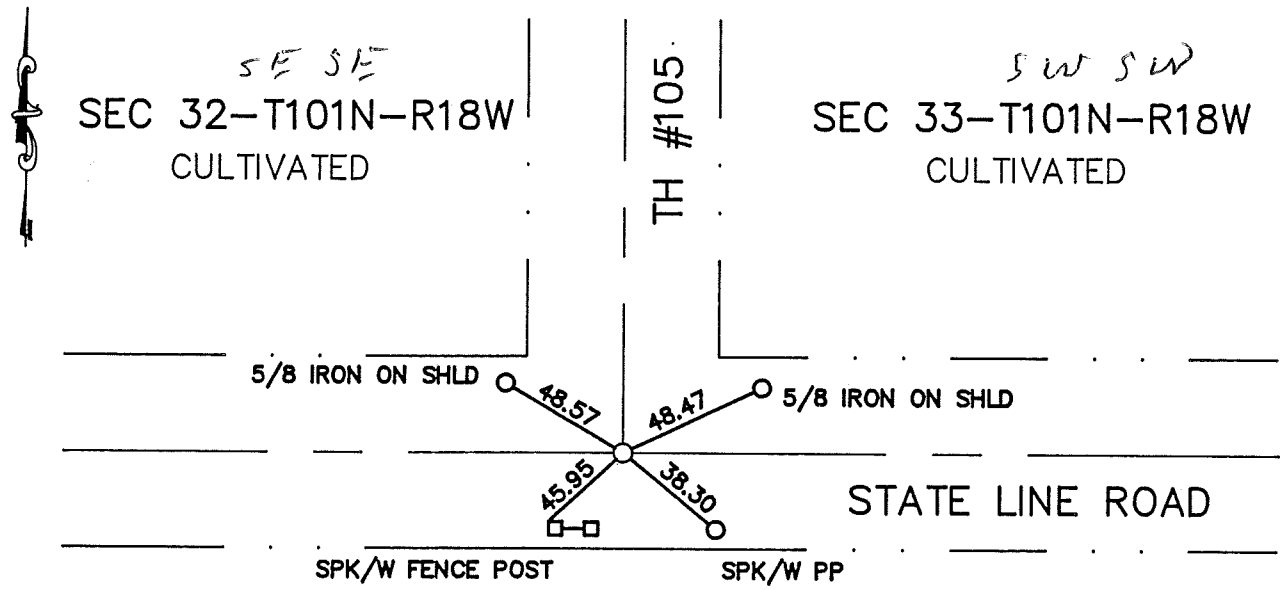

STATE OF IOWA

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 281

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455958

M.H.D. FORM NO. 2105

Book 96 Misc Page 281

SW Cor SEC 33-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1996 TH #105 plans show a monument in place at this location.

1987 Jones Haugh and Smith crew used found 5/8" iron for survey.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at location of found PK nail. Found 3/4" x 3.4' iron agreeing with location on TH #105 road plans. Accepted drill bit as a perpetuation of the original PLS corner and set a cast iron monument over, at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a PK NAIL OVER A 3/4" DRILL BIT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a —

SKETCH OF REFERENCE TIES

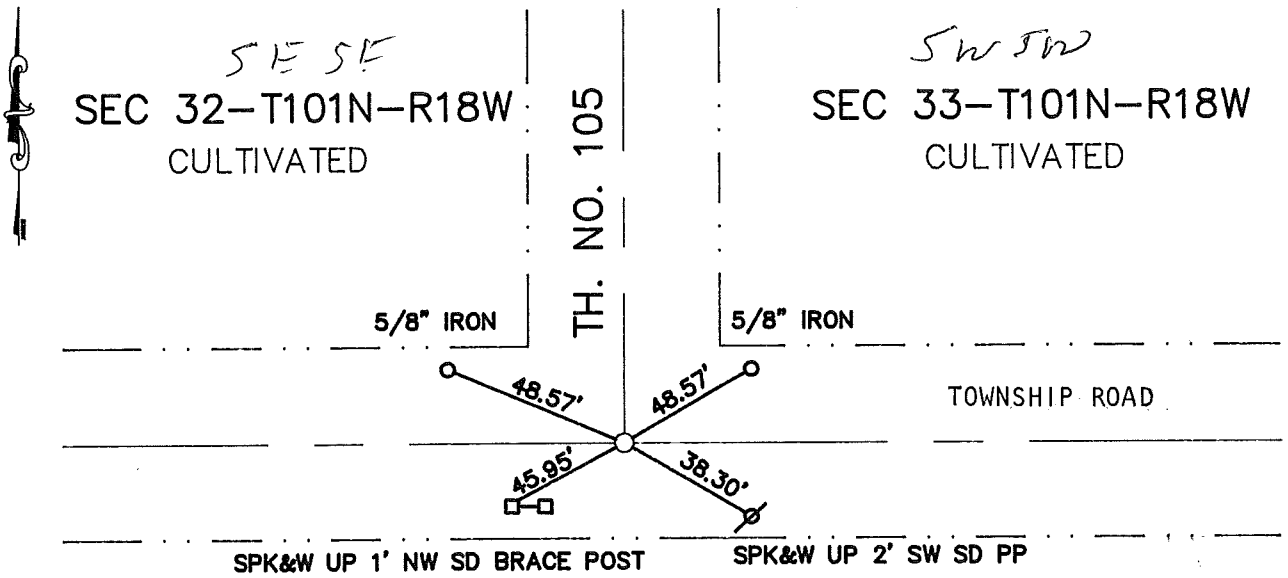

STATE OF IOWA

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 554

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-7-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452226

M.H.D. FORM NO. 2105

Book 94 Misc Page 554

SW Cor SEC 33-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department road plans for TH. No. 105 show a monument inplace.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at CL of township road north and 1' south of CL on township road E-W. Located PK nail at road surface with a 3/4" drill bit 0.5" below road surface.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.