Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 33, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a Cast Iron Disk on 2"x2" Square Pipe Flush with Ground

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

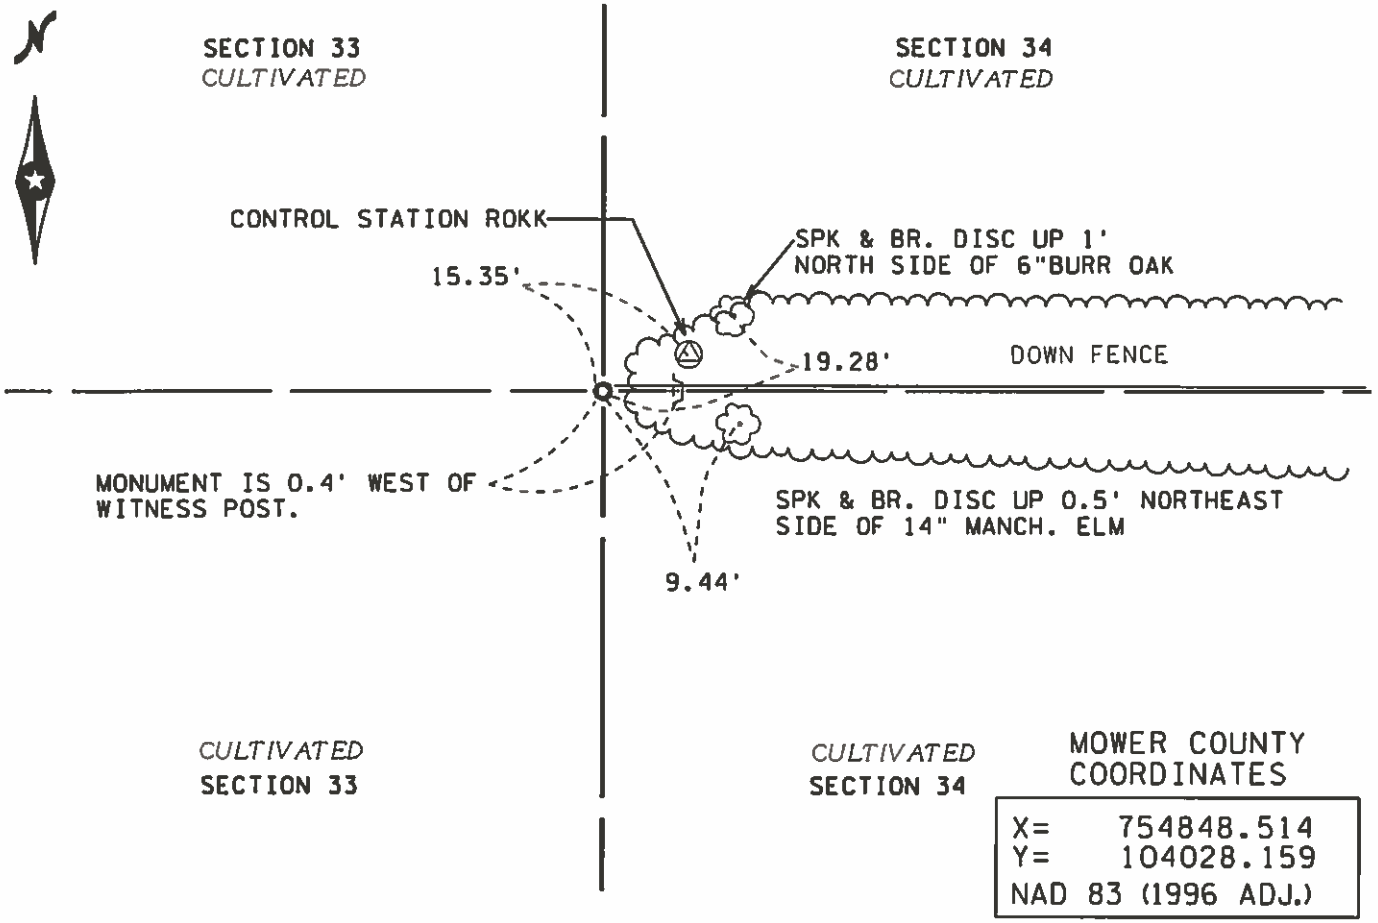

MOWER COUNTY COORDINATES

X= 754848.514
Y= 104028.159
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Briggs (SIGNATURE) 7-27-09 (DATE)

License No. 21199

☒ Land Surveyor ☐ Professional Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorder's office at _____ M. on the ____ day of _____ A.D., 20___

RECEIVED JUL 27 2009

County Recorder

By _____, Deputy

BY:

DOCUMENT NO. _____

Statement of Evidence:

EAST QUARTER CORNER OF SECTION 33, TOWNSHIP 101N, RANGE 18W, 5P.M.

July 16th, 1854	William Anderson, U.S. Deputy Surveyor, during the original Public Land Survey, set a quarter section post and established two bearing trees a 9 inch bur oak S 63 ½ E 98 links and an 11 inch bur oak N 12 ½ W 67 links.
April 24, 2003	Minnesota Department of Transportation placed a cast iron disk on a 2" x 2" Square pipe, 30 inches long, flush with the surface of the ground. Position of corner was established at the intersection of fence lines south and east after using a best fit analysis to establish the fence lines. The position is 0.30 feet south and 24.82 feet east of the lost position. These occupation lines are the best evidence of the position of the original public land survey corner.
April 28, 2009	Dave Griggs, Mndot surveyor, found the cast iron disk on a 2" x 2" Square pipe, flush with the ground. Reference ties were checked and found to be okay. The cast iron disk on a 2" x 2" Square pipe is accepted as the best evidence of the public land survey corner.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.