Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 33 , Township 101N , Range 18W , 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a Cast Iron Monument, FLush.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

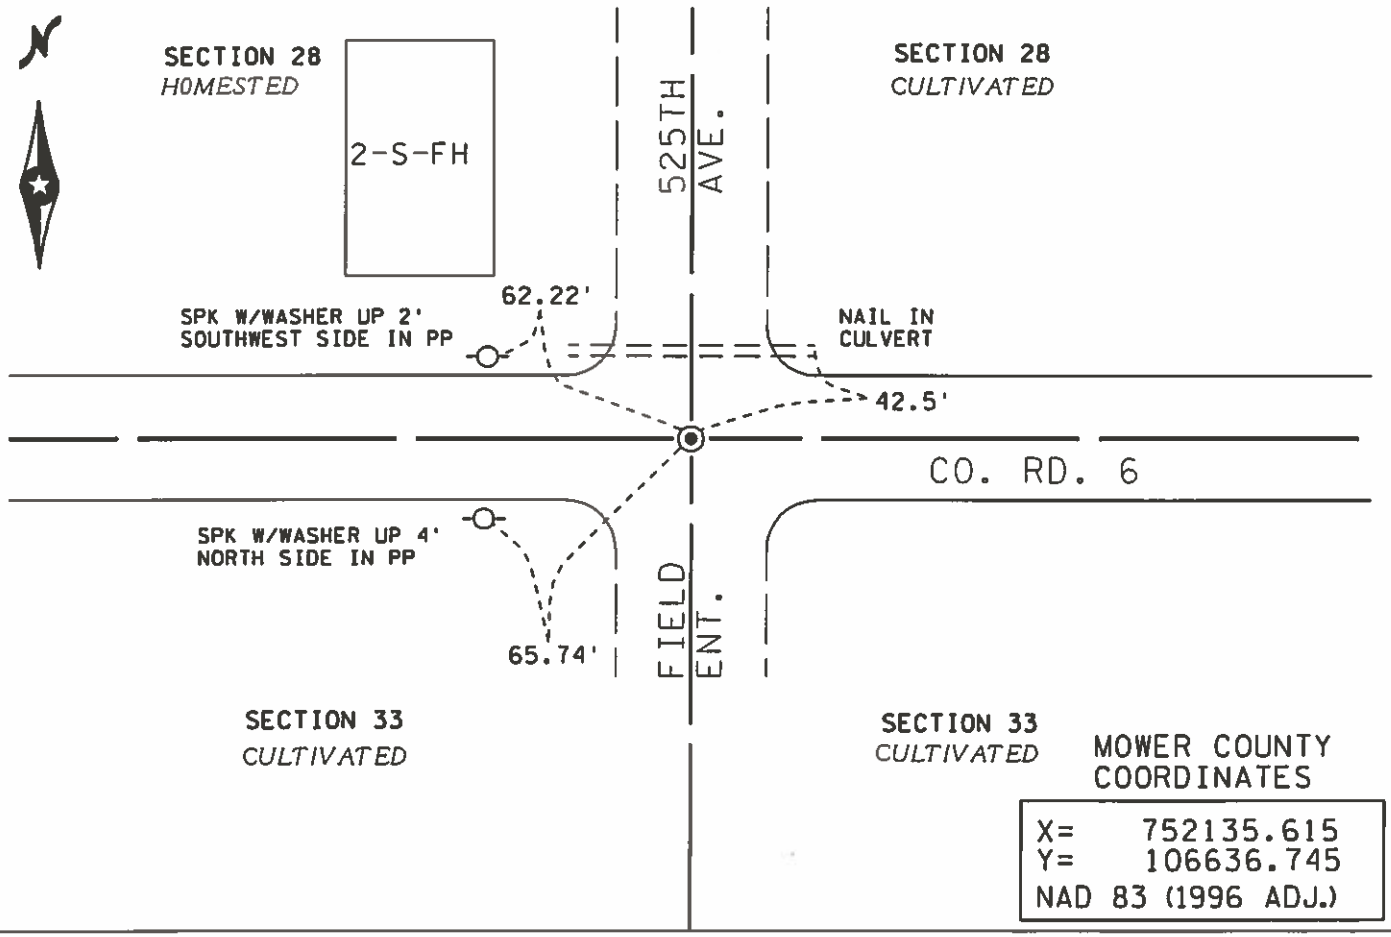

MOWER COUNTY COORDINATES

X= 752135.615
Y= 106636.745
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Briggs (SIGNATURE) 7-27-09 (DATE)

License No. 21199

☒ Land Surveyor ☐ Professional Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorder's office at _____ .M. on the ____ day of _____ A.D., 20 ____

RECEIVED JUL 27 2009

County Recorder _____

By _____, Deputy

BY: _____

DOCUMENT NO. _____

Statement of Evidence:

NORTH QUARTER CORNER OF SECTION 33, TOWNSHIP 101N, RANGE 18W, 5P.M.

1854	This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.
	The following were contacted for section corner information. Mower County Highway Dept. Mower County Recorder Zenk Engineering Tucker Land Surveying
1995	Mower Co. Hwy Dept. records indicated that before CSAH # 6 was rebuilt there was a corner in this location on a straight line between the section corners. Jones, Haugh and smith crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 E-W and the CL of a dead end road N-S. Ray Tucker had dug with backhoe and set this corner, but neither the ties or the corner could be found. Therefore we placed a cast iron monument on a straight line between the SW section corner and the SE corner using distances obtained from Mower Co. Hwy Dept.
	The monument set fit occupation and road centerlines within the section and past survey records and is accepted as the best evidence of a perpetuation of the original public land survey corner.
	For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.
August 13, 2002	Mndot survey crew chief Dean Aarre found a cast iron monument flush. Reference ties were updated.
April 28, 2009	Dave Griggs, Mndot surveyor, found the cast iron monument flush with the road surface. Reference ties checked and found to be okay.
	The cast iron monument is accepted as the best evidence of the public land survey corner.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 28, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/16/95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/16/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

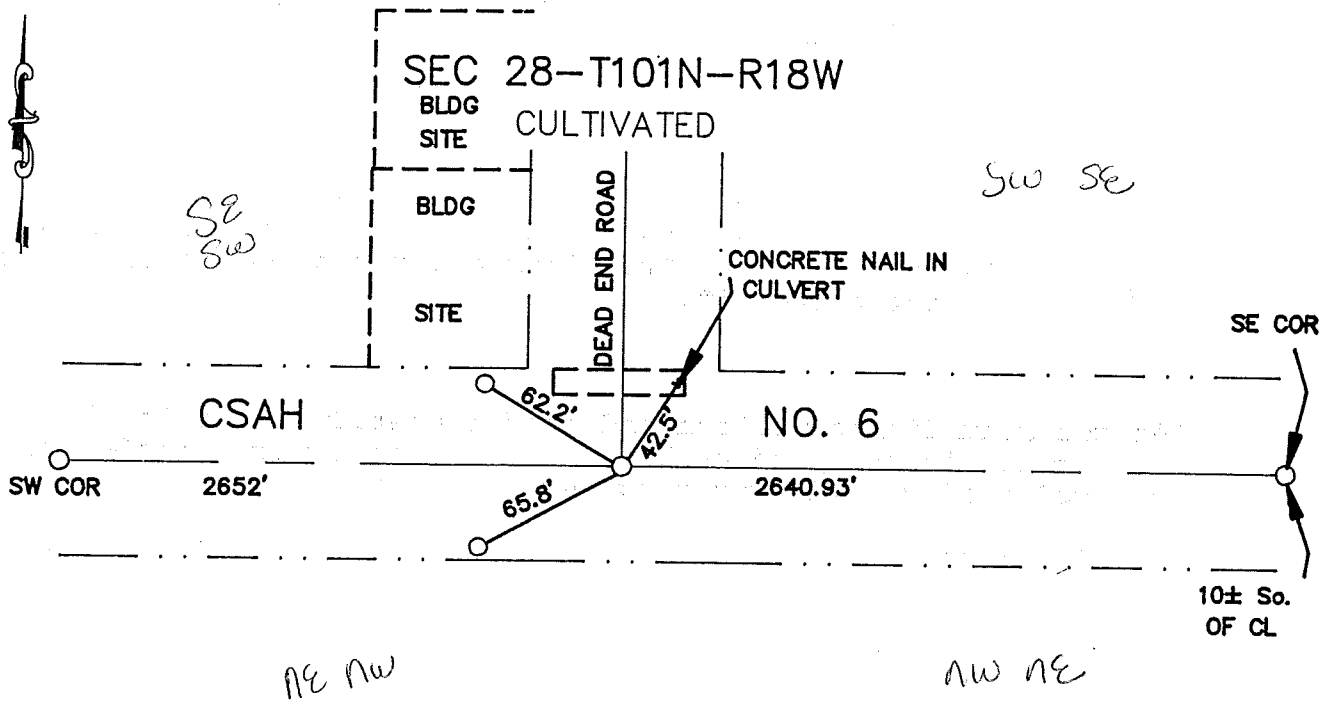

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles W Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 140240

M.H.D. FORM NO. 2105 Book 89 PAGE 214

Book 89 Misc Page 214

S 1/4 Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Mower Co. Hwy Dept. records indicated that before CSAH #6 was rebuilt there was a corner in this location on a straight line between the sec corners. Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 E-W and the CL of a dead end road N-S. Ray Tucker had dug with backhoe and set this corner, but neither the ties or the corner could be found. Therefore we placed a cast iron monument on a straight line between the SW section corner and the SE corner using distances obtained from Mower Co. Hwy Dept.

The monument set fit occupation and road centerlines within the section and past survey records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 215