Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 33, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-28-09 (DATE) found a Cast Iron Monument, Down 0.4 feet.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

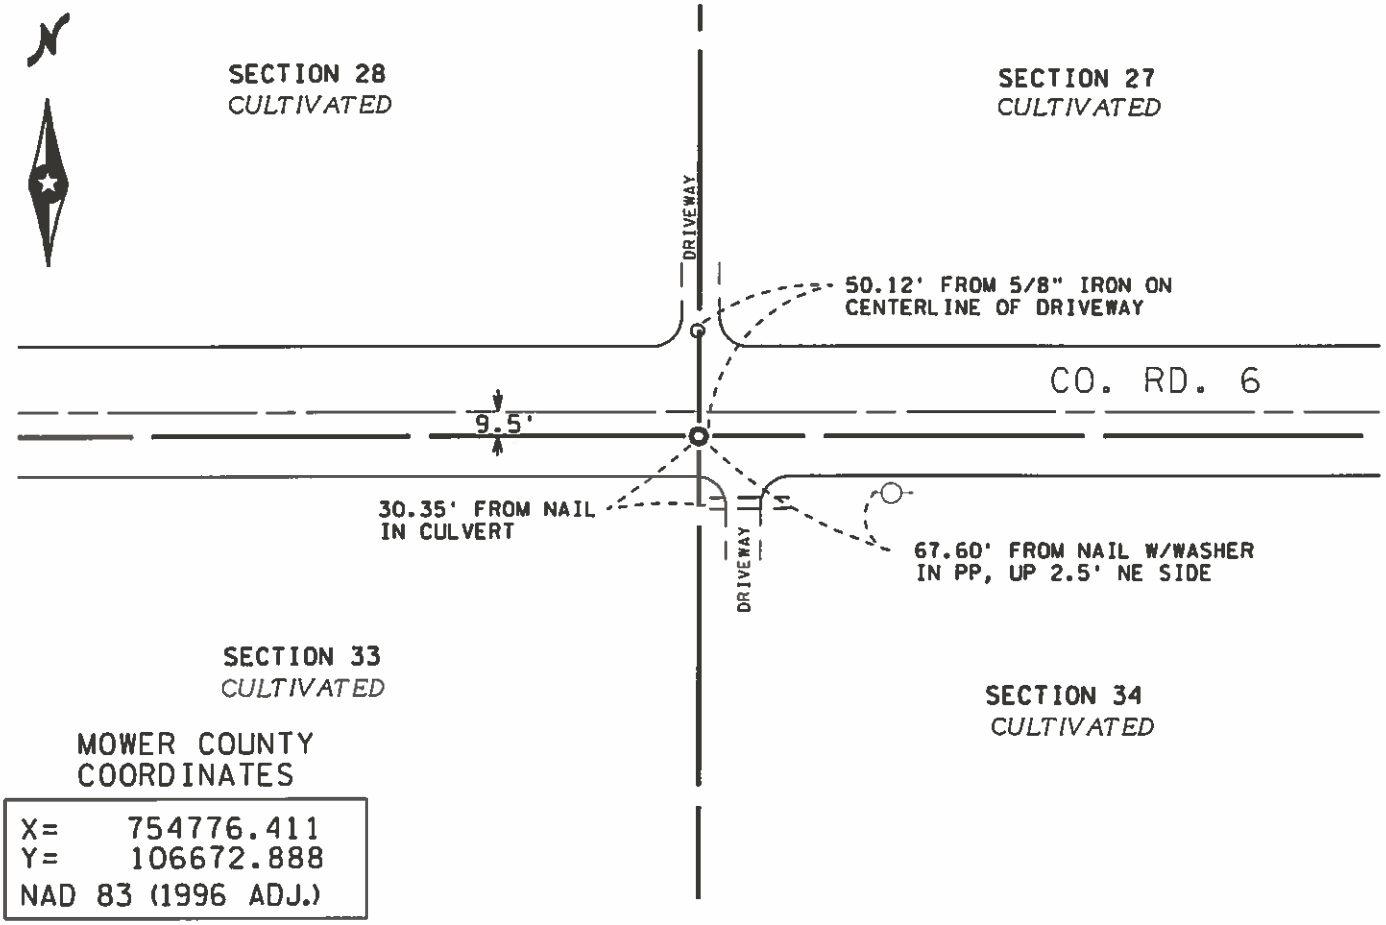

MOWER COUNTY COORDINATES

X= 754776.411
Y= 106672.888
NAD 83 (1996 ADJ.)

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Griggs — SIGNATURE — 7-27-09 DATE

License No. 21199

☒ Land Surveyor ☐ Professional Engineer

☐ County Surveyor ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the Co. Recorder's office at _____ .M. on the ____ day of _____ A.D., 20 ___

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

RECEIVED JUL 27 2009 BY: _____

Statement of Evidence:

NORTHEAST CORNER OF SECTION 33, TOWNSHIP 101N, RANGE 18W, 5P.M.

1854	This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.
	The following were contacted for section corner information. Mower County Highway Dept. Mower County Recorder Zenk Engineering Tucker Land Surveying
1995	Mower Co. R/W plans for CSAH # 6 show corner at this location.
1995	Jones Haugh and Smith crew, under direction of john Schulte, Mower county Surveyor RLS 13807, found a cast iron monument 9.5 ' south of CL on CSAH No. 6 which was in agreement with Mower County R/W plans and past surveys. Accepted this monument as a perpetuation of the original PLS corner.
	The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.
	For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.
August 13, 2002	Dean Aarre, MNDOT crew chief, found cast iron monument 0.1 feet below the surface. The reference ties were checked and found to be okay. The monument was left as found.
April 28, 2009	Dave Griggs, Mndot surveyor, found the cast iron monument down 0.4 foot below the road surface. Reference ties were checked and found to be okay.
	The cast iron monument is accepted as the best evidence of the public land survey corner.

Contact the Minnesota Department of Transportation Surveys Office in Rochester, Minnesota for more detailed information.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 28, Township 101 Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/14/1995 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

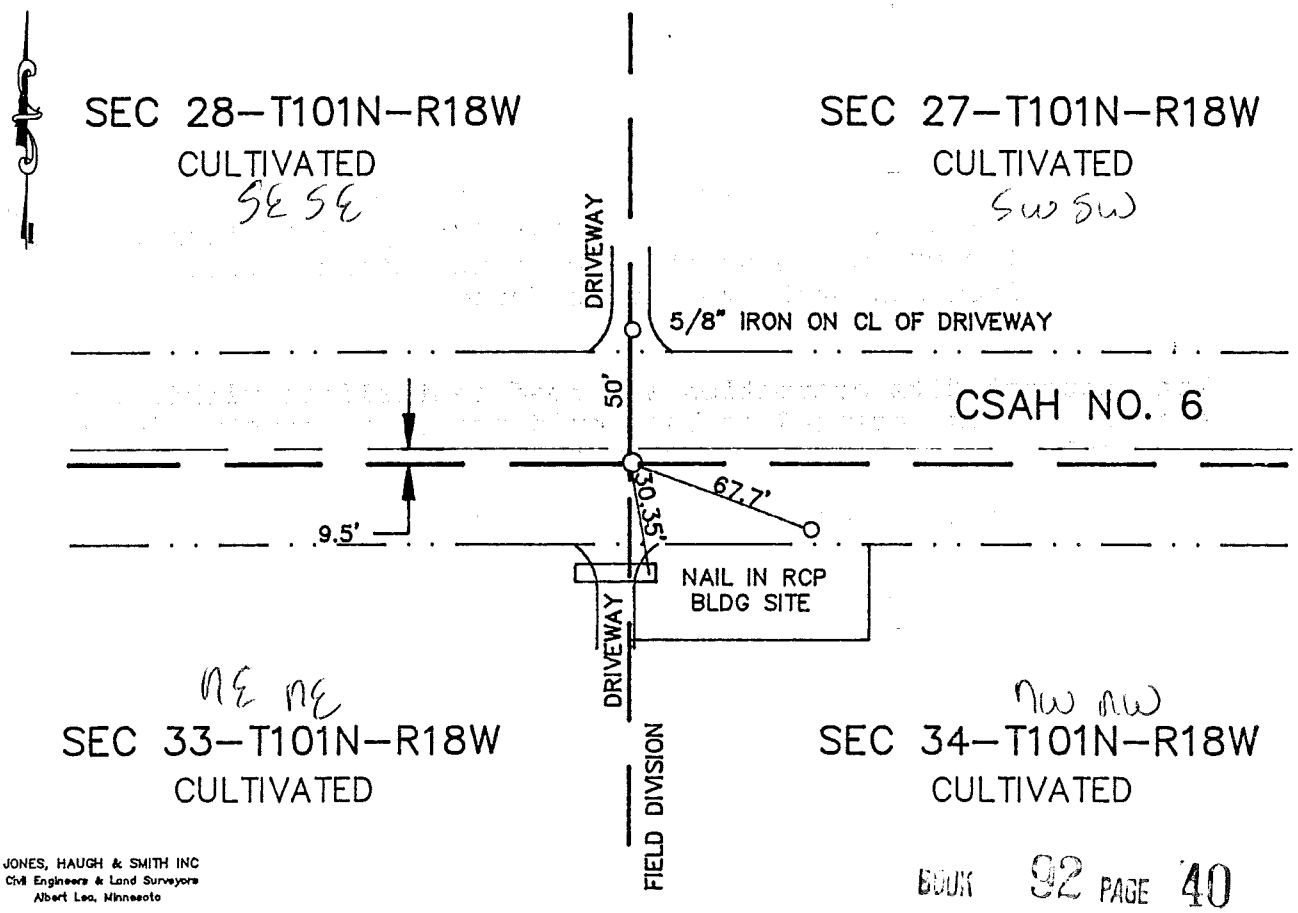

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 40

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE 7-25-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER 446682

County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Winfield Taylor, Deputy

DOCUMENT NO 446682

M.H.D. FORM NO. 2105

Book 92 Page 40 Misc

SE Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Mower County R/W plans for CSAH 6 show corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a cast iron monument 9.5' south of CL on CSAH No. 6 which was in agreement with Mower County R/W plans and past surveys. Accepted this monument as a perpetuation of the original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.