TIE BOOK P. 92

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 34, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 8-30-85 (DATE) found a 2½" x 1½" x 30" iron bar

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

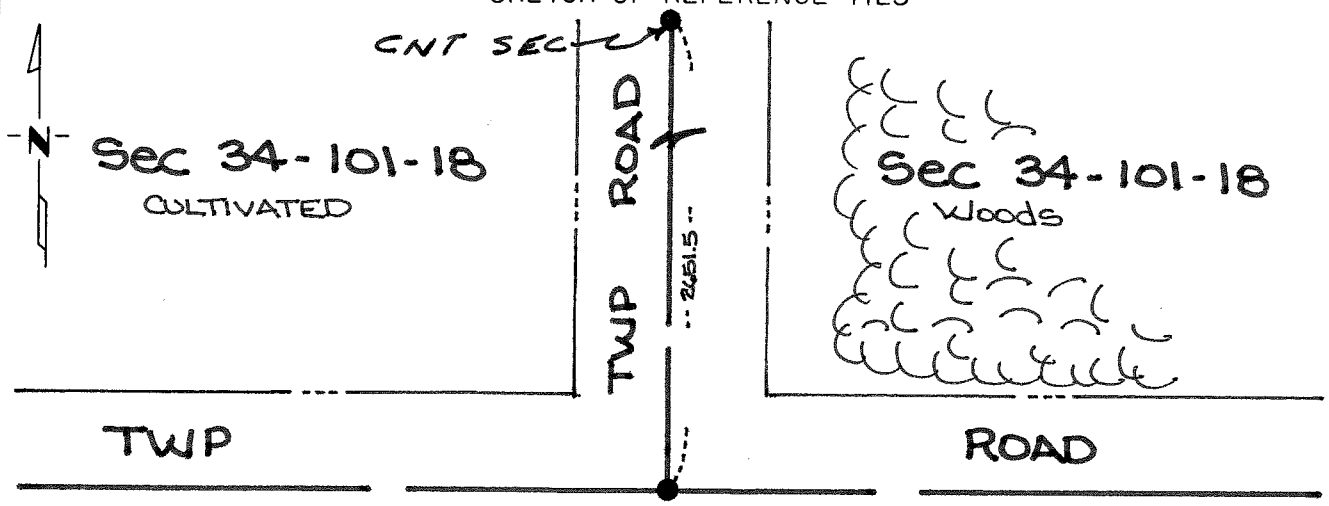

STATE OF IOWA

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-85 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$S\frac{1}{4}$ cor Sec 34-101-18

1852 Andrew Talcot, Deputy Surveyor, set wood post during public land survey.

1895 Clausen, Mower County Surveyor, found wood post and set a $2\frac{1}{2}$" x $1\frac{1}{2}$" x 30" iron bar.

1985 Jones, Haugh & Smith Inc crew dug on centerline centerline of township roads north - east - west and found a $2\frac{1}{2}$" x $1\frac{1}{2}$" x 30" iron bar. Accepted bar as corner set by Clausen.

Corner found fits occupation and road centerlines within the section and records by previous surveyors and is accepted as a perpetuation of the original public land survey corner.