Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 36, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

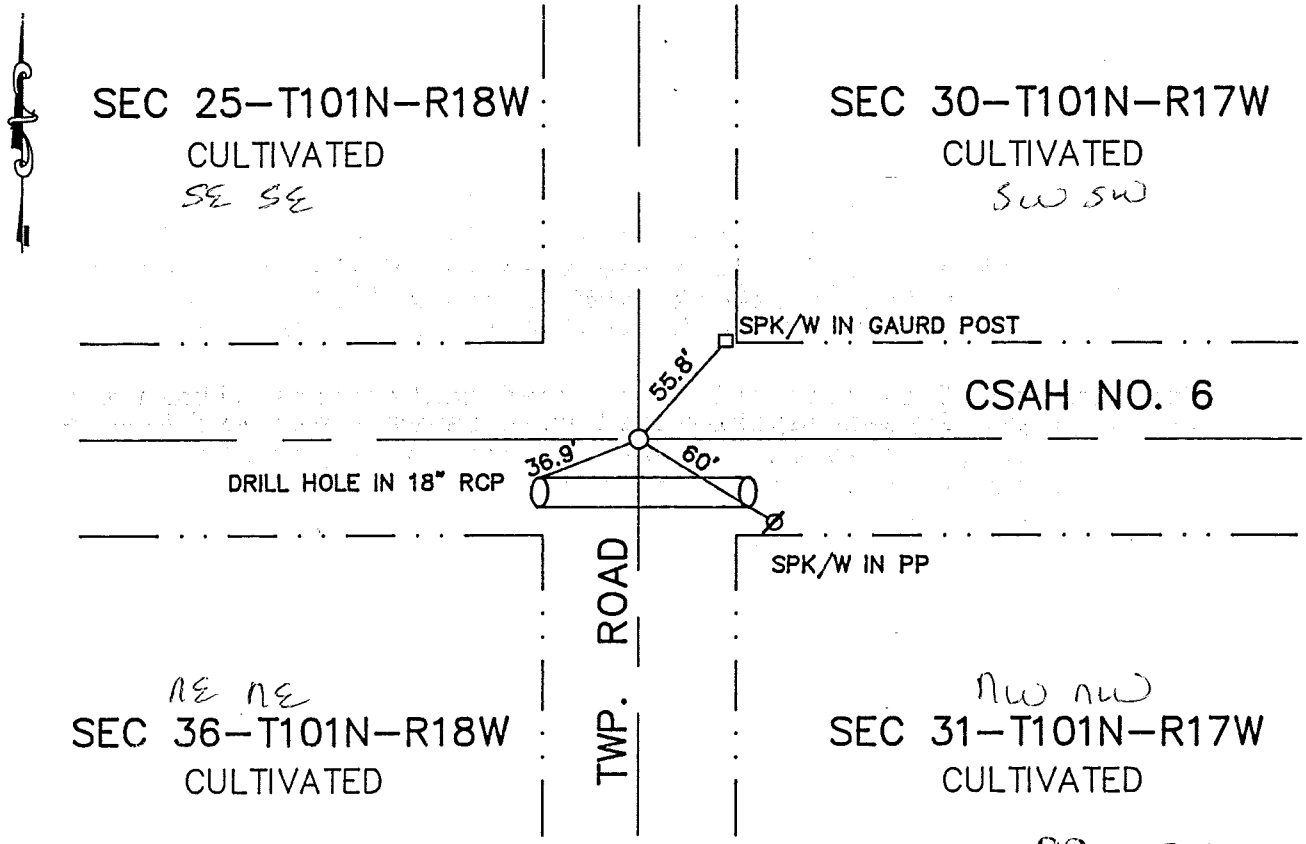

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 214

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-16-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Singer

By Susan M. Davis, Deputy

DOCUMENT NO. 447266

M.H.D. FORM NO. 2105

Book 92 Misc Page 214

NE Cor SEC 36-101-18

This corner was originally established by Deputy William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County R/W plans show a concrete monument at this location.

Jones Haugh and Smith records show a concrete monument at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a cast iron monument which agrees with location shown on CSAH NO.6 R/W plans and past survey records. Accepted this position as perpetuation of PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

P 42 "B"

NORTHWEST Corner of Section 31, Township 101 N, Range 17 W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


the corner location shown on the sketch:

On _____ found A 7"N-S X 4" E-W X 8" HIGH CHIPPED LIMESTONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 9-28-89 placed CTY. MON. OVER LIMESTONE

SKETCH OF REFERENCE TIES

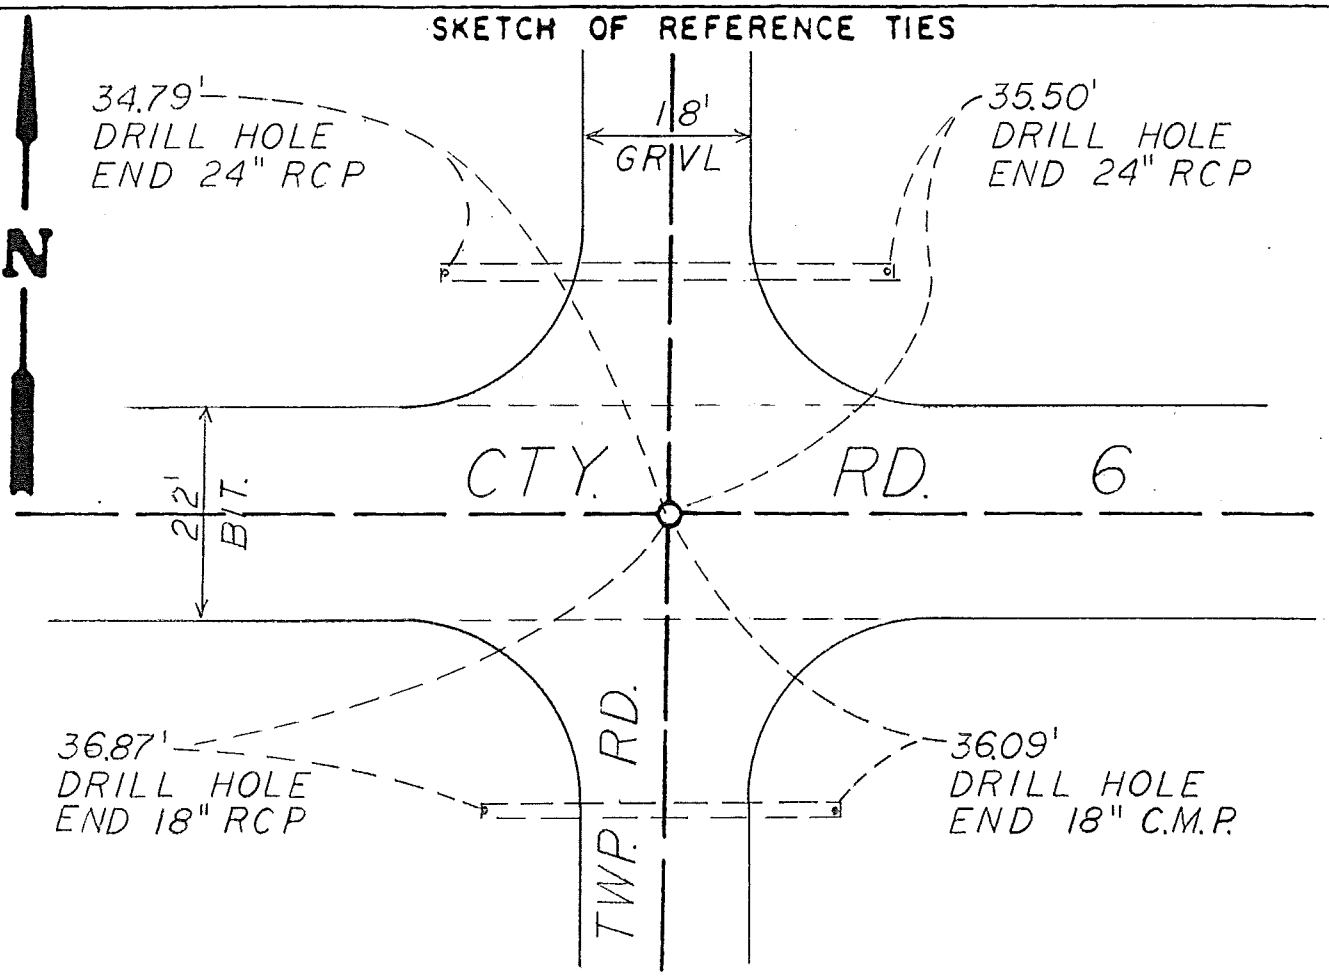

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
1-30-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof. Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the _____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

NORTHWEST CORNER SECTION 31, TOWNSHIP 101 NORTH, RANGE 17 WEST, 5TH P.M.

August, 1853 — Elisha Norris, Deputy Surveyor, set post for corner and built a mound with trench per instructions. Drove a charred stake in center and planted Osage Orange seed in SE corner, during the original Public Land Survey.

1930 — Mower County Engineer's Plans for County Aid Job C3 show ties to the Sec. cor. No monument was shown.

1950 — Mower County Engineer's Plans for the County Road show new ties to the Sec. Cor. No Monument was shown.

Sept. 28, 1989 — Ronald J. Olson, RLS 11009, excavated with a backhoe 6 feet E-W by 4 feet N-S by 4 feet deep to natural ground centered at the intersection of the roads and found a 7inch N-S by 4inch E-W by 8 inch high chipped Limestone 3.5 feet below the surface in blue clay surrounded by black mottled soil. The stone was found 1 foot south of the center of the intersection. A 2 inch by 9 inch high wood stake and a 1/2 inch rod with a hub were found over the limestone. A spike & washer was found at the surface 0.6 foot easterly of the limestone. A 1 inch by 12 inch rebar was placed on the east side of the Limestone before back filling.

An analysis of the record data gives no indication of the origin of the stone. The limestone was used by early surveyors to mark other corners in the area and it agrees with the lines of occupation. The location of the stone has also been maintained by the County since 1930. The stone is accepted as marking the location of the original Public Land Survey Corner.

For details of the analysis contact Zenk Read Trygstad Inc., Albert Lea, Minnesota.