Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 1, Township T101N Range R18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/21/1993 (DATE) found a IRON BAR

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/21/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

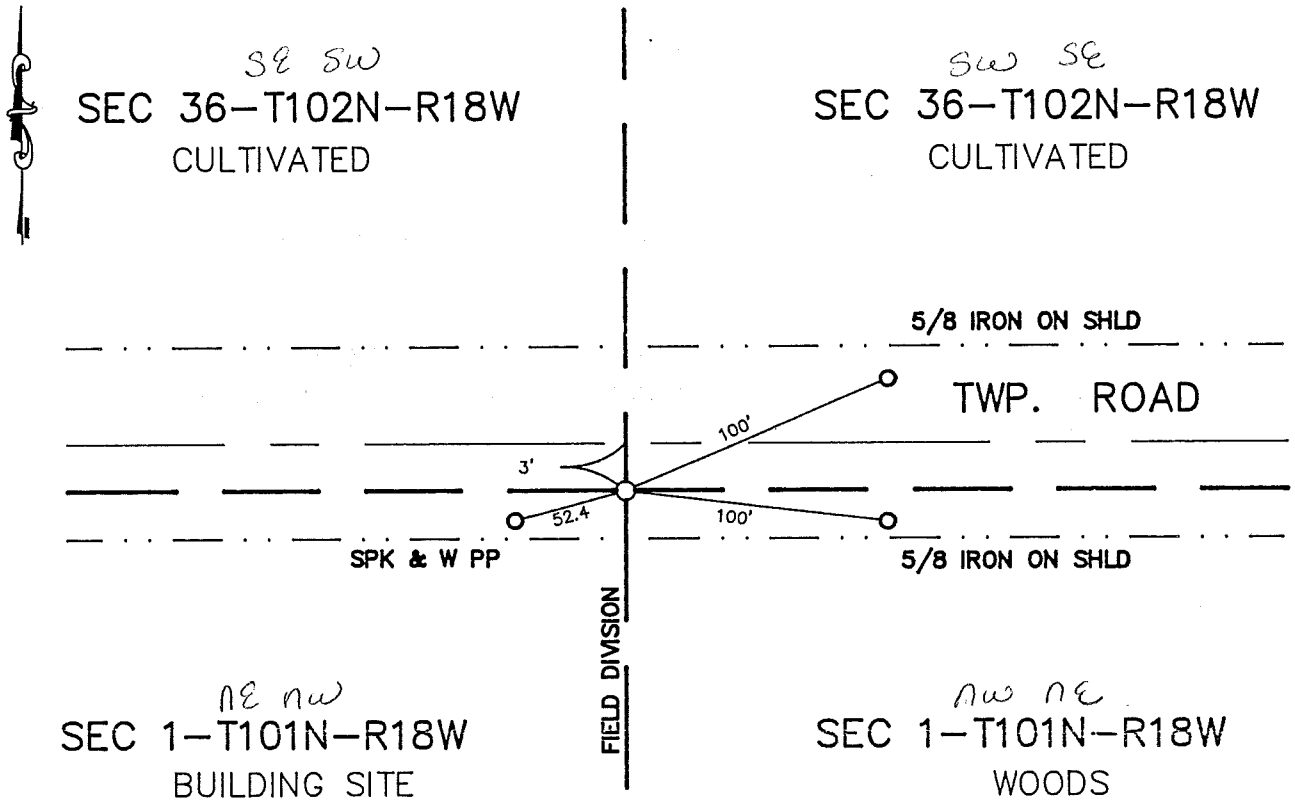

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 140739

M.H.D. FORM NO. 2105

BOOK 89 PAGE 212 Book 89 Misc Page 212

N 1/4 Cor SEC 1-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1885 Clausen field notes state that he placed a fence post at the North 1/4 of section 1.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 3 feet South of the CL of township road E-W and found a 1"x2" iron bar and placed a cast iron monument over it.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 213

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 1, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/21/1993 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/21/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

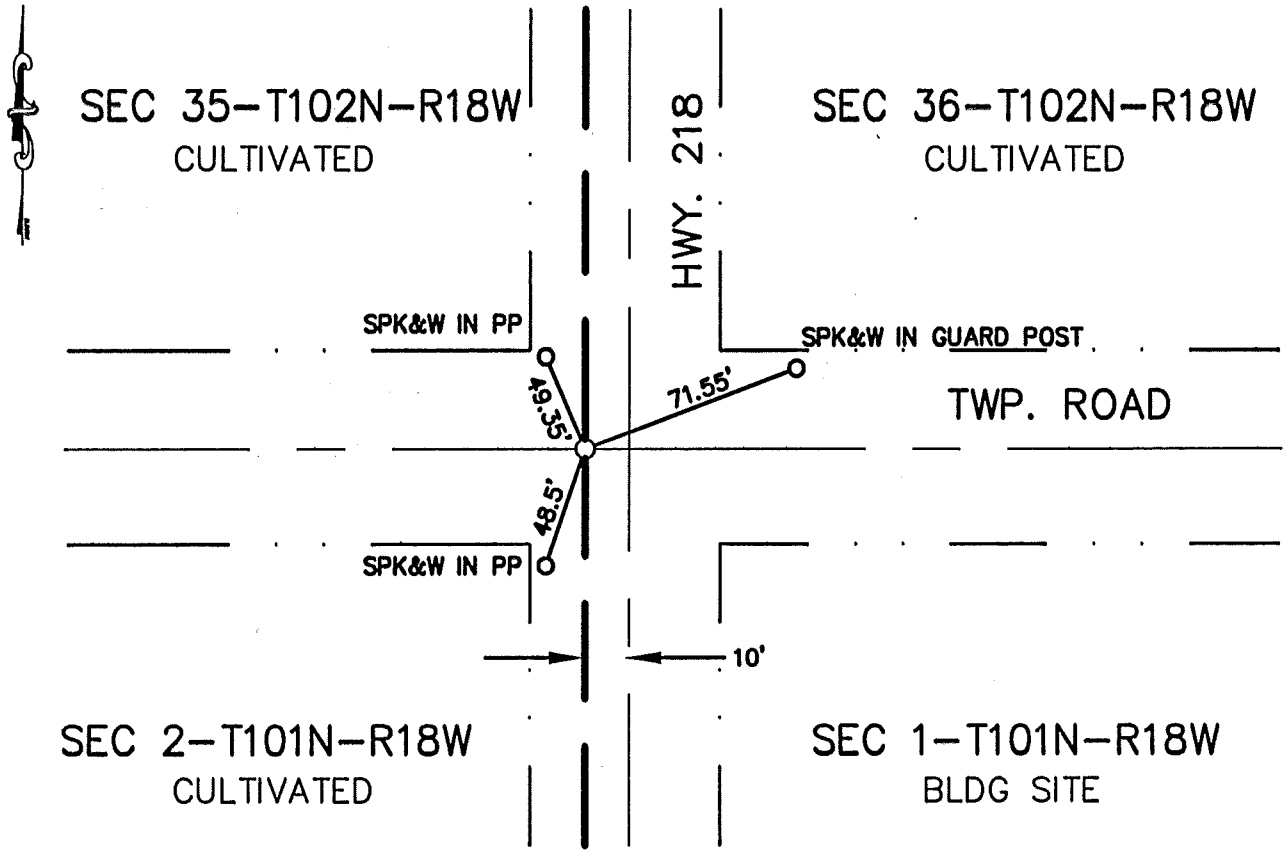

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-19-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor SEC 1-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe 10' east of CL TH. 218 and CL twp. road. Found concrete monument below road surface and set a cast iron monument over, at the road surface. This location is in agreement with TH #218 R/W plan and location used in past surveys.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 2, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 2-13-90 (DATE) found a 1 3/4" sq. iron 2.5' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 2-13-90 (DATE) placed a 5/8"Ø iron over 1 3/4" iron.

SKETCH OF REFERENCE TIES

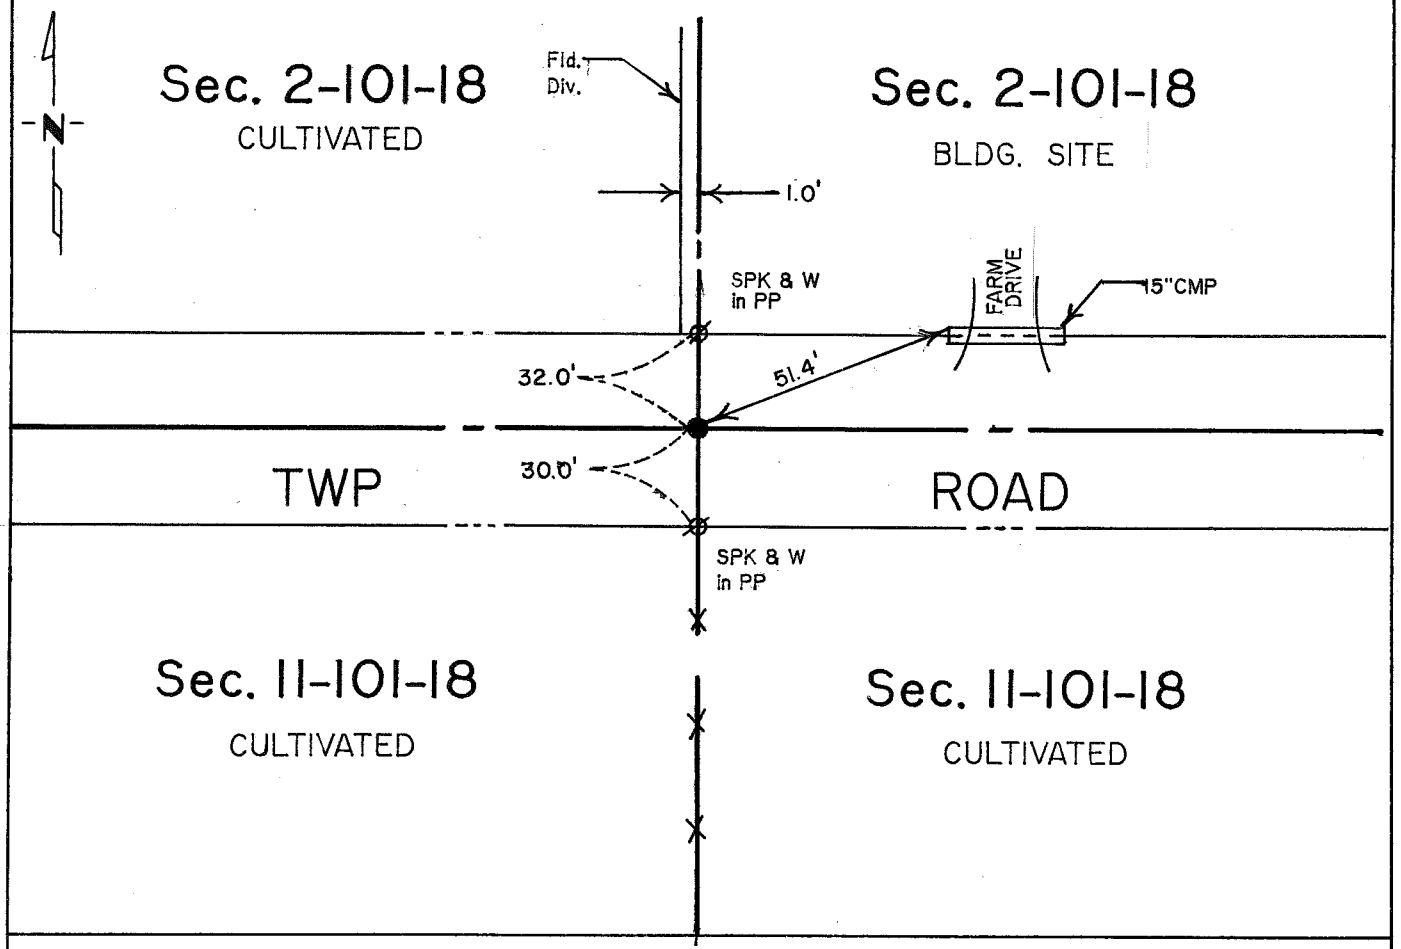

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-19-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/2 corner Sec 2-101-18

1854 This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and a trench.

1990 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Highway Department
Mower County Recorder's Office

1990 Jones, Haugh & Smith Inc crew dug with a jackhammer on centerline of east-west road with fence line south and 1.0 feet west of a field division north. Found a 1 3/4" square iron 2.5 feet below road surface. Placed a 5/8" diameter iron capped RLS 13807 over 1 3/4" iron.

The monument found fits occupation and road centerline within the section and is accepted as the best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh & Smith Inc.

"H" TIE BOOK P 86

Form 349 CHAPTER 389 LAWS OF 1921

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

(SEC TWP)

Corner to Sec. 2, 1, T. 101 N. R. 18 W.

Page 86

State of Minnesota
County of Mower } ss.

I hereby certify that on the first day of June 19 29

I found the Quarter Corner between Sec. 2 and 1, T. 101 N., R 18 W.

which was evidenced by Iron stake


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established

reference or witness monuments consisting of 24 inch cottonwood tree with hubs

which reference or witness monuments are located in the manner following:

Metal Cupola of Barn NW. Diagram of reference points shown below.

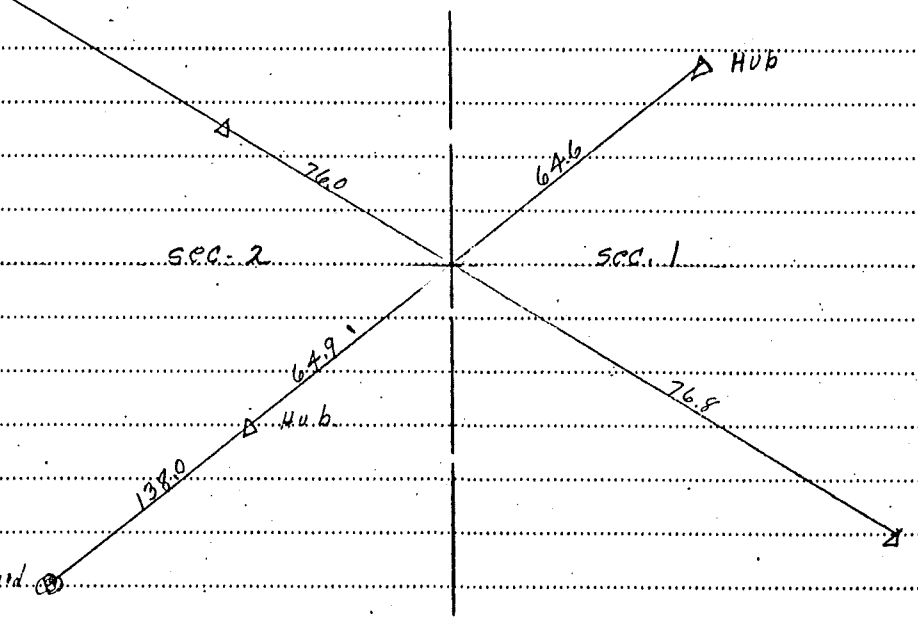

Dated at Austin Minn., this 29th day of December 19 29

Resident Engineer

OFFICE OF REGISTER OF DEEDS
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the

day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

H

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Corner to Sec. 1, 2, 11, 12. T. 101 N. R. 18 W.


State of Minnesota
County of Mower } ss.

Page (See P. 9)

I hereby certify that on Second day of June 19 29
I found the Section Corner Referred to above
which was evidenced by Iron bar
and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established
reference or witness monuments consisting of Cottonwood tree and hubs
which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

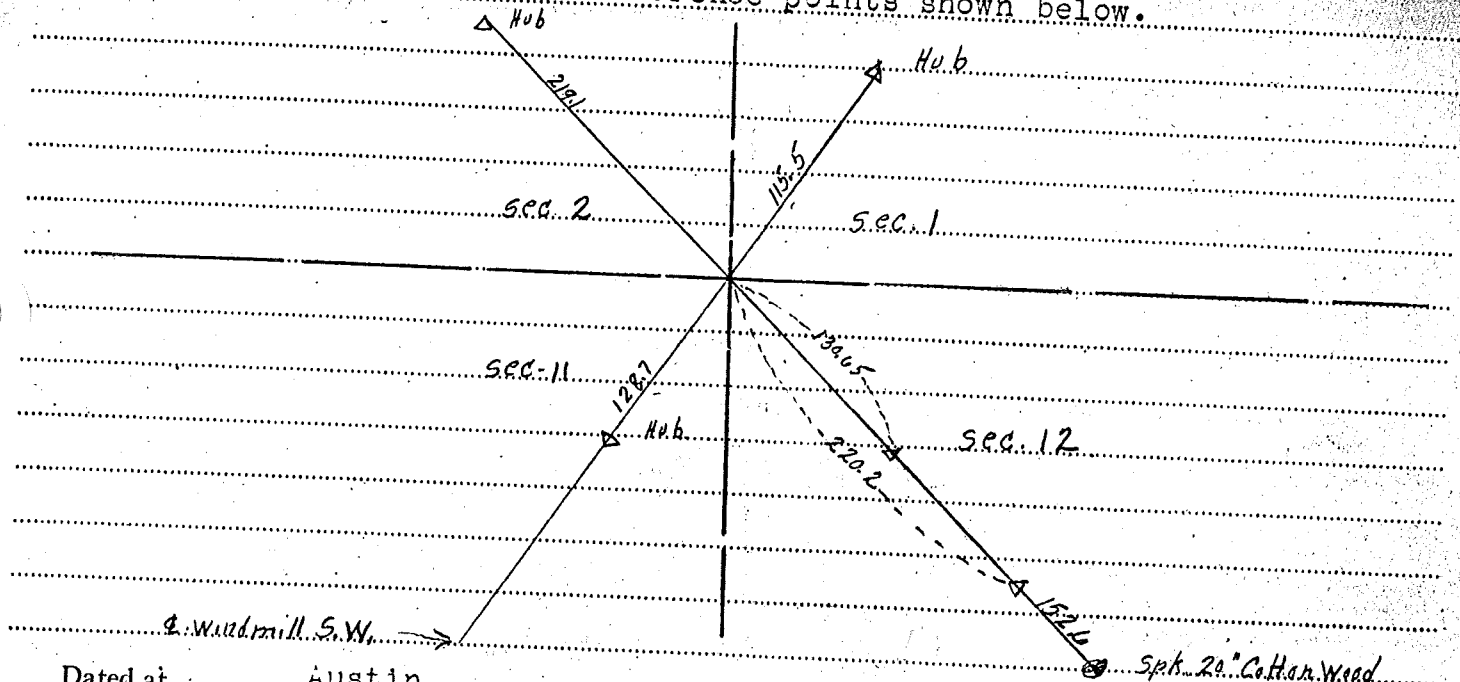

Dated at Austin Minn., this 3rd day of January 19 30

Resident Engineer

OFFICE OF REGISTER OF DEEDS
County of } ss.

I hereby certify that the within instrument was filed in this office for record on the
day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

E

F

G

"N" TIC BOOK. P49 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 4, Township 101 N, Range 18 W, 5 th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 1-25-77 (DATE) found a 1½ inch x 2½ inch iron bar up 0.7 foot

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

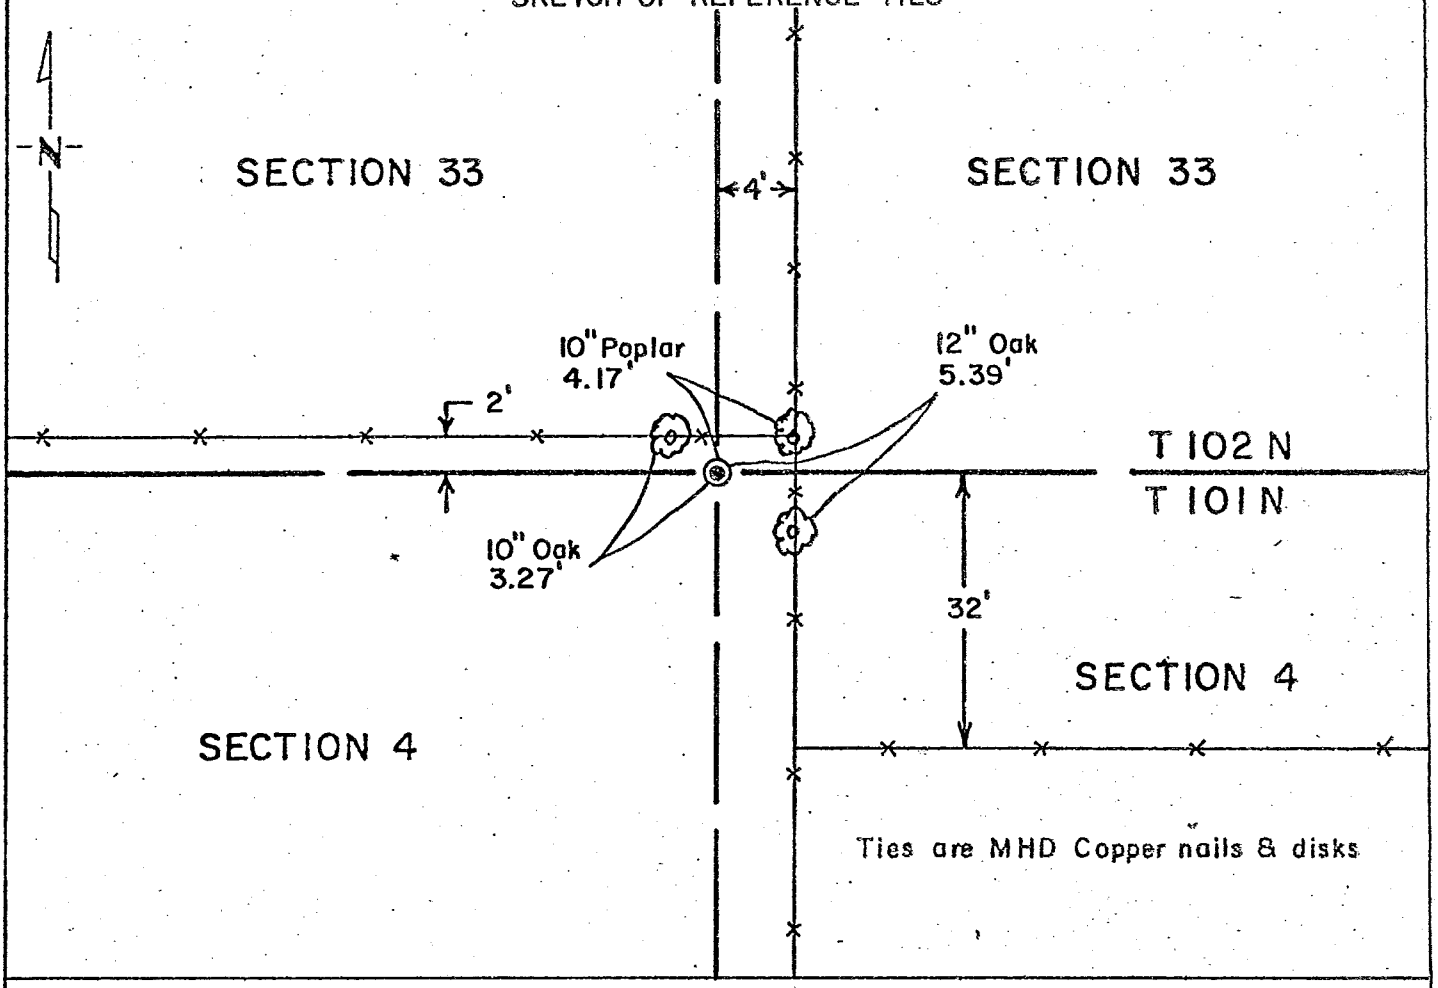

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 1-30-78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER ~~REGISTER OF DEEDS~~

County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 10:00 A.M. on the 28th day of February A.D., 19 78

County Recorder ~~Register of Deeds~~ _____

By _____, Deputy

DOCUMENT NO. 332584

M.H.D. FORM NO. 2105

Statement of Evidence:

$N\frac{1}{4}$ Section 4 T101N R18W 5th. P.M.

July 1854 J.B. Reyman, Deputy Surveyor, set quarter section post, deposited charcoal raised mound with trench and pits.

Jan. 1977 Minnesota Department of Transportation recovered an $1\frac{1}{2}$" x $2\frac{1}{2}$" iron stake at the corner.

Mr. Myron Aultfather, local landowner, related the following history as told to him by his father. "The $1\frac{1}{2}$" x $2\frac{1}{2}$" iron stake was set about 1900 to replace a deteriorated engraved wood post.

An analysis of the survey and record data indicates that the iron stake is identical to other monuments set about 1900 and on the testimony of Mr. Aultfather is accepted as perpetuating the original Public Land Survey Corner.

For details of the 1977 survey data contact the Surveying and Mapping Section, Minnesota Department of Transportation's Rochester District Office.

"E" TIE BOOK P 49. Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East Quarter Corner of Section 5, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 7-30-76 (DATE) found a 1½ inch x 2½ inch iron bar down 0.6 foot

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

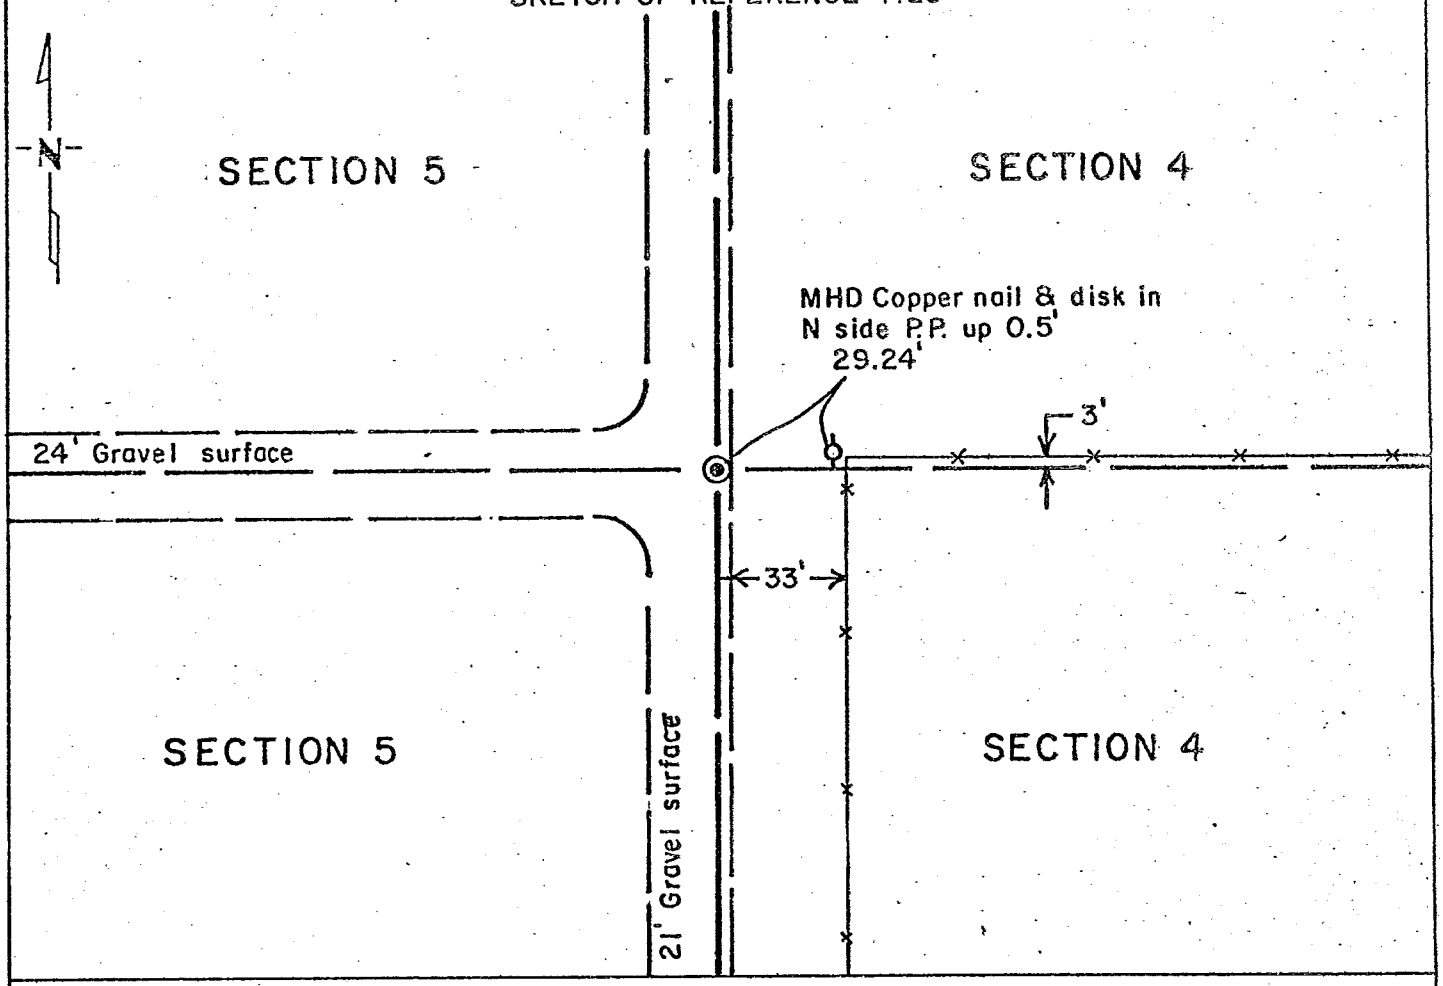

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan 1-30-78
SIGNATURE DATE

Registration No. 11527

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

COUNTY RECORDER
OFFICE OF THE ~~REGISTER OF DEEDS~~
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 10:00 A .M. on the 28th day of February A.D., 19 78

County Recorder
~~Register of Deeds~~ _____

By _____, Deputy

DOCUMENT NO. 332583

M.H.D. FORM NO. 2105

Statement of Evidence:

E½ Section 5 T101N R18W 5th P.M.

July 1854 William I. Anderson, Deputy Surveyor, set a quarter section post, deposited charcoal, raised mound of earth with trench and pits during the original Public Land Survey.

March 1, 1921 M.N. Clausen, Civil Engineer and Surveyor, in a recorded plat shows an iron stake 1½" x 2½" x 30" long at the corner.

Oct. 1973 Mower County Highway Department found an iron inplace.

July 1976 Minnesota Department of Transportation recovered an 1½" x 2½" iron bar.

An analysis of the record and survey data indicates that the origin of the 1½" x 2½" iron stake is not of record, however, it is identical to other monuments placed circa 1900, the iron stake is, therefore, accepted as marking the Public Land Survey corner.

For details of the survey data contact the Surveying and Mapping section of the Department of Transportation's District Office, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 5, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☒ On 11-5-93 (DATE) found a 1 1/2" x 2" iron bar

☐ left monument as found, ☒ lowered monument, ☐ removed monument (explain)

☒ On 11-5-93 (DATE) placed a Cast iron monument over iron bar

SKETCH OF REFERENCE TIES

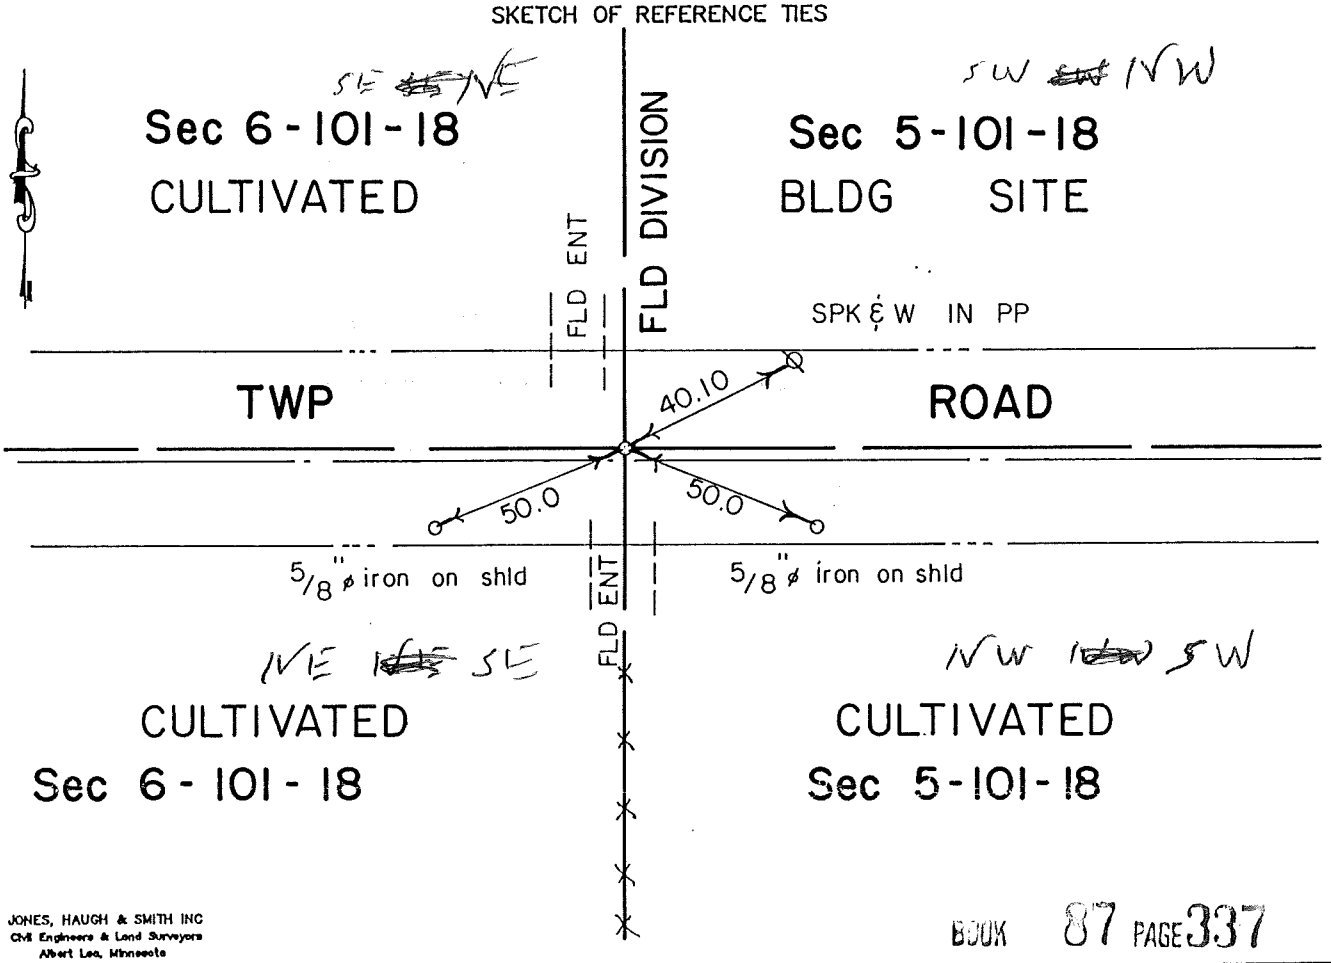

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 87 PAGE 337

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-12-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 19 day of June A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 437346

Book 87 Misc Page 337

M.H.D. FORM NO. 2105

W 1/4 Cor SEC 5-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones, Haugh and Smith crew, under direction of John Schulte, Mower Co. Surveyor RLS 13807, dug with the county backhoe on the CL of a E-W Twp. road and in line with a fence to the south and a field division to the north. Excavated a 1.5' X 2' X 28' long hole and uncovered an iron bar 1' below the road surface. Continued digging and uncovered no further evidence of a perpetuation of the original corner. Accepted iron bar as best evidence and reset monument at same location. A CIM was set over the bar at the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

"E" TIE BOOK p 49 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 5, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 7-30-76 (DATE) found a Cast iron monument down 0.6 foot

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

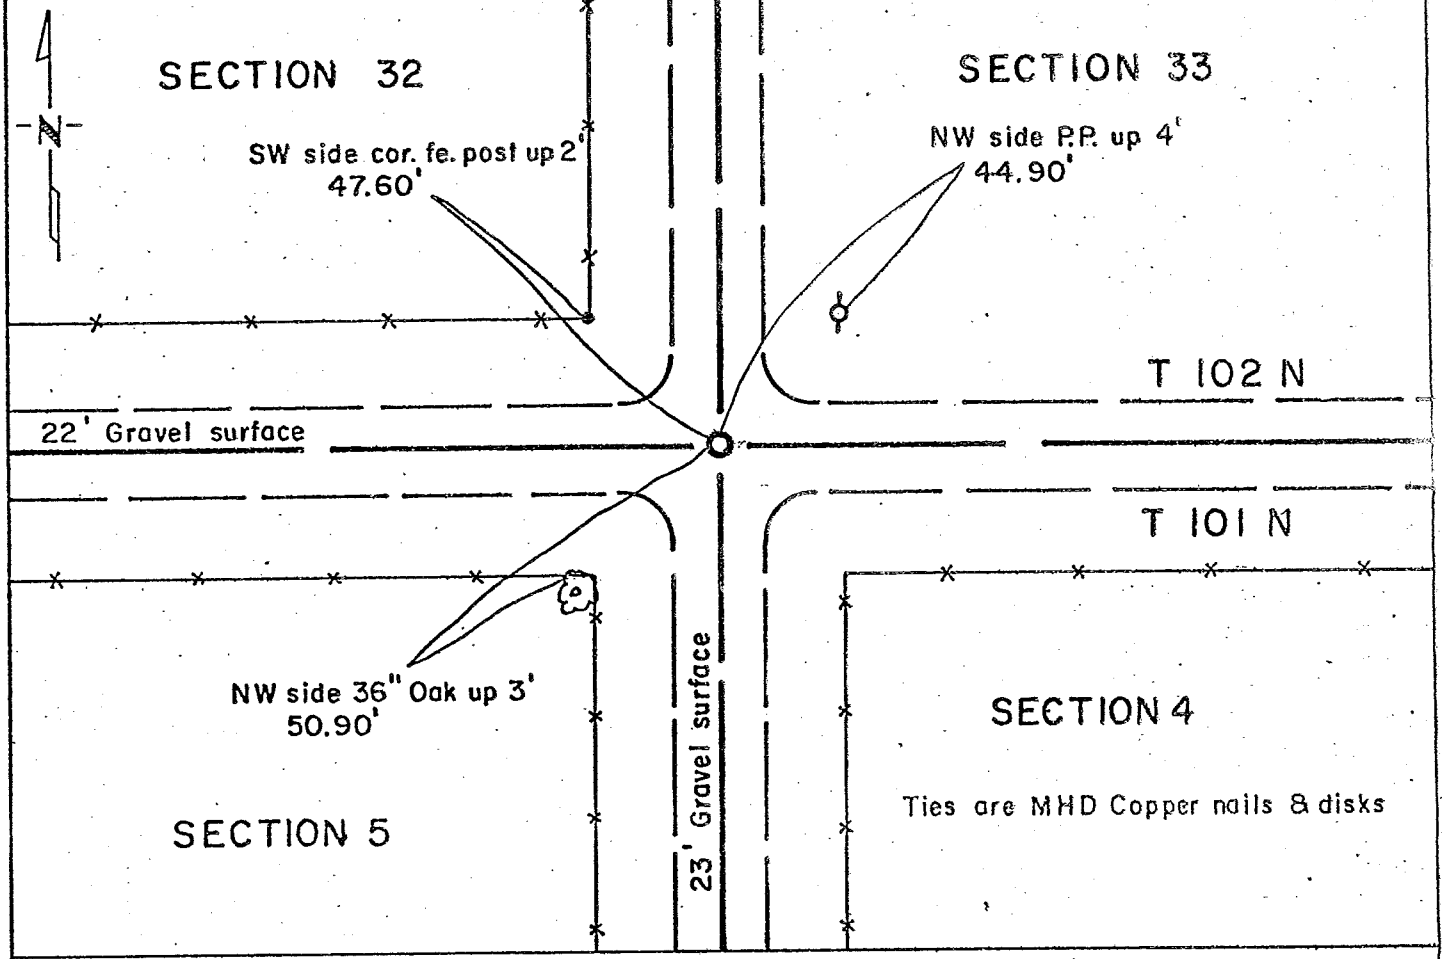

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 1-30-78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE ~~REGISTER OF DEEDS~~ COUNTY RECORDER

County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 10:00 A.M. on the 28th day of February A.D., 1978

~~Register of Deeds~~ County Recorder _____

By _____, Deputy

DOCUMENT NO. 332586

M.H.D. FORM NO. 2105

Statement of Evidence:

NE Corner Section 5 T101N R18W 5th P.M.

July 1854 J.B. Reyman, Deputy Surveyor, set post for corner during the orginial Public Land Survey.

July 9, 1896 M.N.Clausen, Surveyor and Civil Engineer, found remains of original stake and set an iron stake.

March 1, 1921 M.N.Clausen, Civil Engineer and Surveyor, in a recorded plat shows an iron stake $2\frac{1}{2}$" x $2\frac{1}{2}$" x 30" long at the corner.

1952 County Engineer records show an $1\frac{1}{2}$" x $1\frac{1}{2}$" iron stake inplace.

Oct. 1973 Mower County Highway Department found a $\frac{1}{2}$" bar at the corner and placed a standard cast iron secion corner monument.

An analysis of the record and survey data indicates the cast iron perpetuates the original Public Land Survey corner.

For details of the survey data contact the Surveying and Mapping Section of the Department of Transportation's District Office, Rochester.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 5, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1994 (DATE) found a 2 1/2" X 30" SQAURE IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

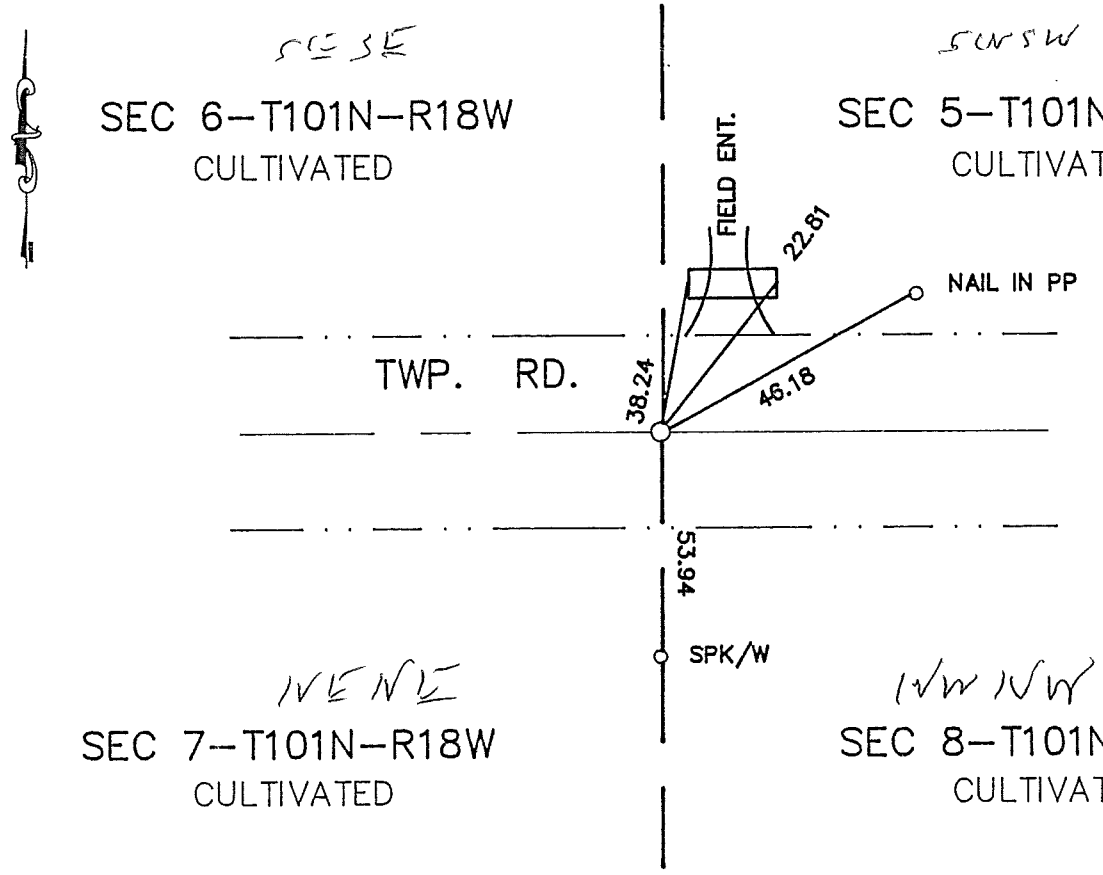

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446230

I hereby certify that this document was filed in the County Rec. office at 1 P .M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engel

By Winifred Taylor, Deputy

DOCUMENT NO. 446230

M.H.D. FORM NO. 2105

Book 91 Page 482

BOOK 91 PAGE 482

SW Cor SEC 5-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1988 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp. road E-W and in line with fence lines N-S. A 2.5" x 30" square iron monument was found 1.8' deep. A CIM set in place of the square iron.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

TIE BOOK P. 49 Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 8, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 7-30-75 (DATE) found a Cast Iron Monument down 0.5 foot

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

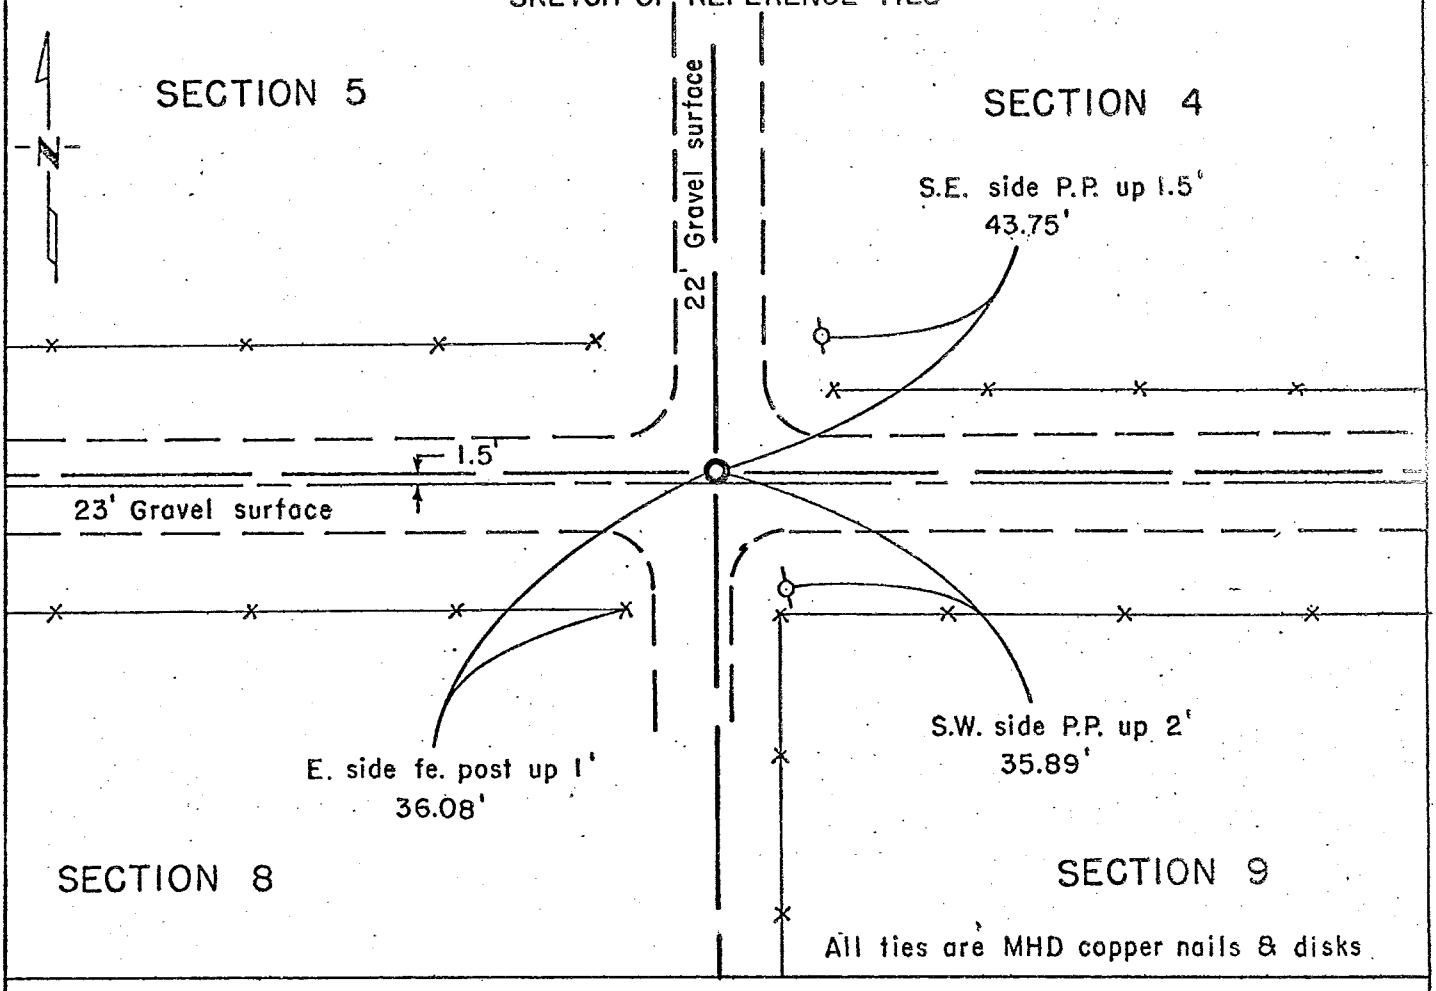

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Marlow R. McGowan (SIGNATURE) 1-30-78 (DATE)

Registration No. 11527

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

COUNTY RECORDER
OFFICE OF THE ~~REGISTER OF DEEDS~~
County of Mower

I hereby certify that this document was filed in the Reg. of Deeds office at 10:00 A .M. on the 28th day of February A.D., 19 78

County Recorder
~~Register of Deeds~~ _____

By _____, Deputy

DOCUMENT NO. 332585

M.H.D. FORM NO. 2105

Statement of Evidence:

NE Corner Section 8 T101N R18W 5th P.M.

July 1854 William I. Anderson, Deputy Surveyor, set post at the corner, deposited charcoal, raised mound of earth with trench and pits during the original Public Land Survey.

July 9, 1896 M.N.Clausen, Surveyor and Civil Engineer, in a recorded survey shows an iron stake at the corner.

Oct. 1973 Mower County Highway Department recovered an 1½" x 1½" iron stake at the corner and placed a cast iron monument over it.

An analysis of the survey and record data indicates that the iron stake has marked the corner since 1896 and is, therefore, accepted as marking the Public Land Survey corner.

For details of the survey data, contact the Surveying and Mapping Section of the Minnesota Department of Transportation's Rochester District Office.

Index No. P. 94-99 / "R"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 9, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

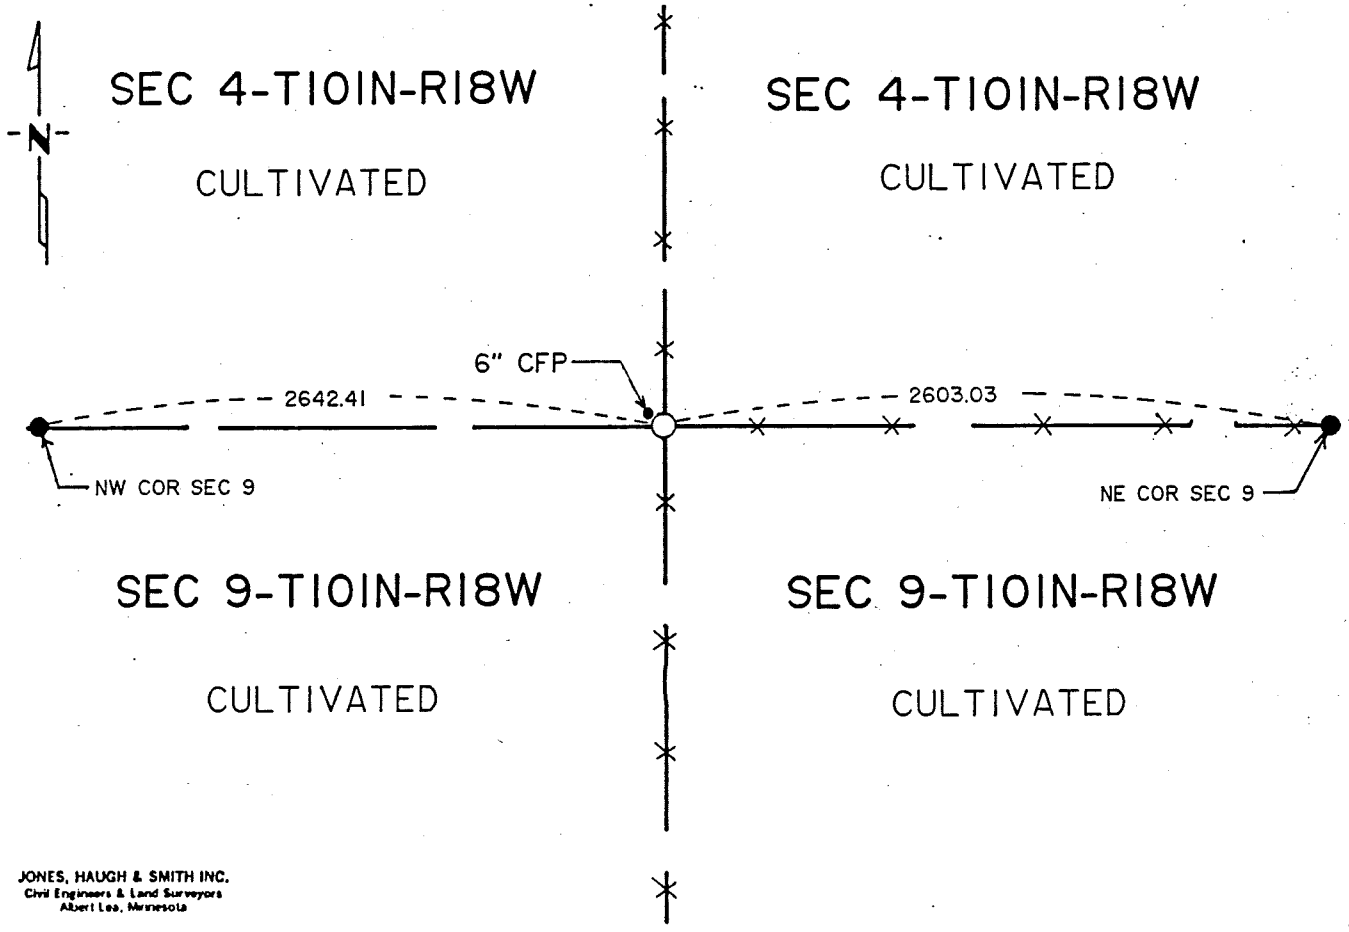

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 9-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench. The following ties were taken:

18" Burr Oak	N 74 3/4° E	310 links (194.60 ft)
10" Burr Oak	S 59 3/4° E	425 links (280.50 ft)

The following were contacted for section corner information:

Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1884 Clausen field notes indicates a government post.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, accepted the three-way fence intersection at the N 1/4 as best evidence of a perpetuation thereof. Set cast iron monument on south side of 6" corner fence post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. p49 "L"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 9, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a MN DOT CIM CONTINUED DIGGING AND FOUND 1"x4" IRON BAR UNDER CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

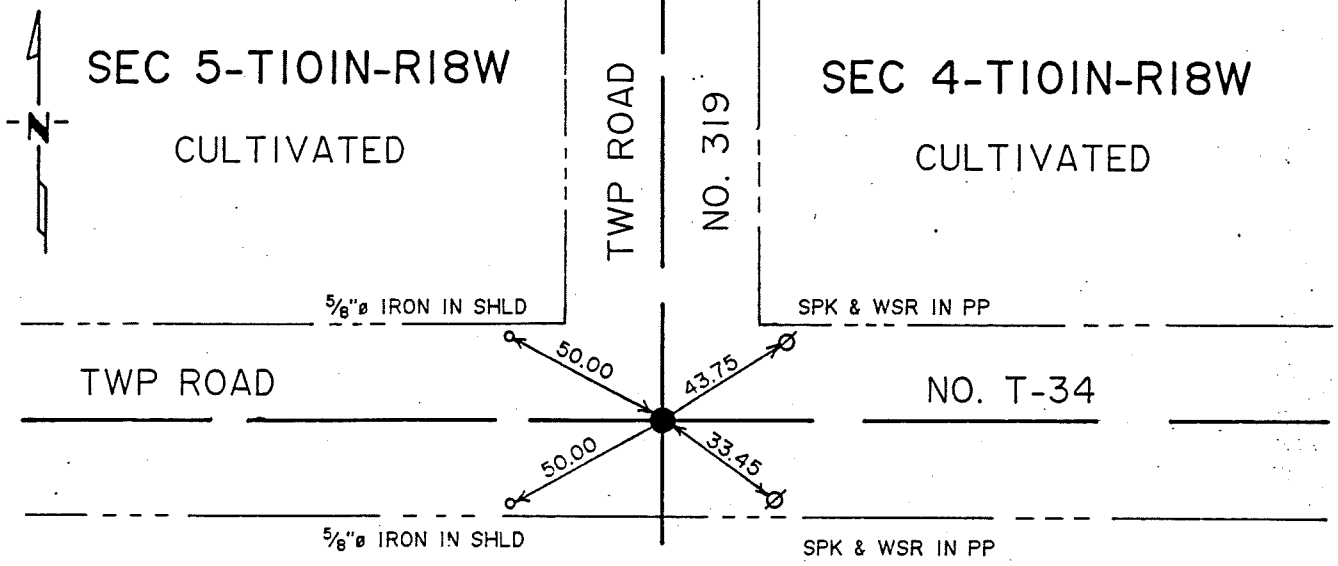

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 9-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

Book A in the Office of the Mower County Highway Department indicates a cast iron monument down 5" at the corners of Sections 4, 5, 8 & 9.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe on centerline centerline and uncovered a MN DOT cast iron monument 1" deep. Continued digging and found a 1"x4" iron bar under cast iron monument four feet deep in virgin soil. Left monuments as found and reset cast iron monument over iron bar.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. p49. "5"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 9, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

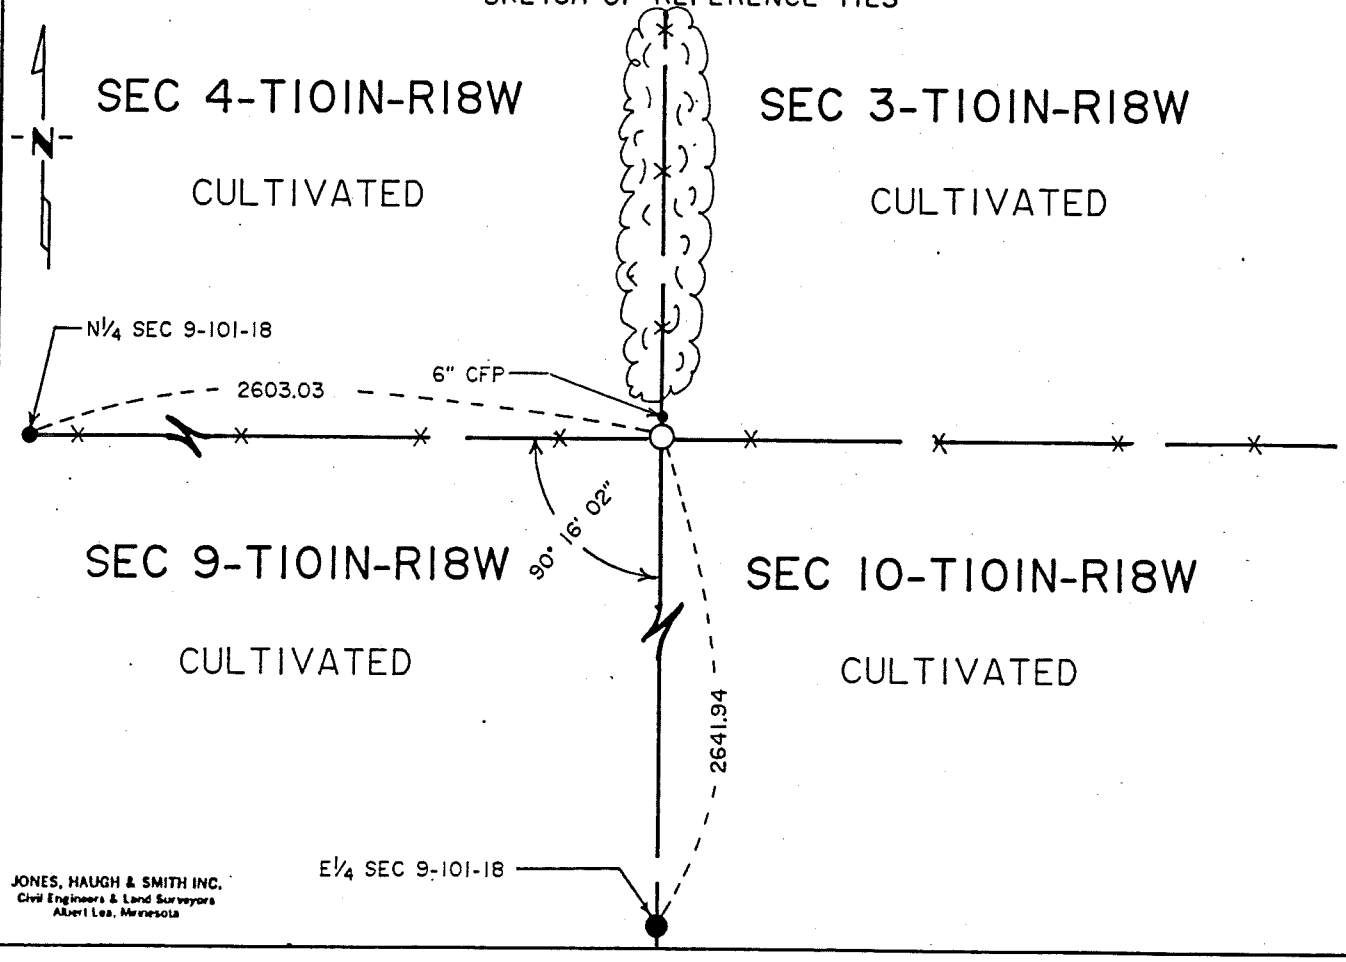

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 12-15-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 9-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was offset 750 links (495 feet) to the east of the true corner. Set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1884 Clausen field notes indicates a government post.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, found a 6" diameter corner fence post in a three-way fence intersection. Accepted as best evidence of a perpetuation of the original public land survey corner and set a cast iron monument on the south side of corner fence post.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 11, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-18-91 (DATE) found a cast iron monument 0.7' below road surface over a 6"Ø conc. monument with 3/4"Ø iron cast in center.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

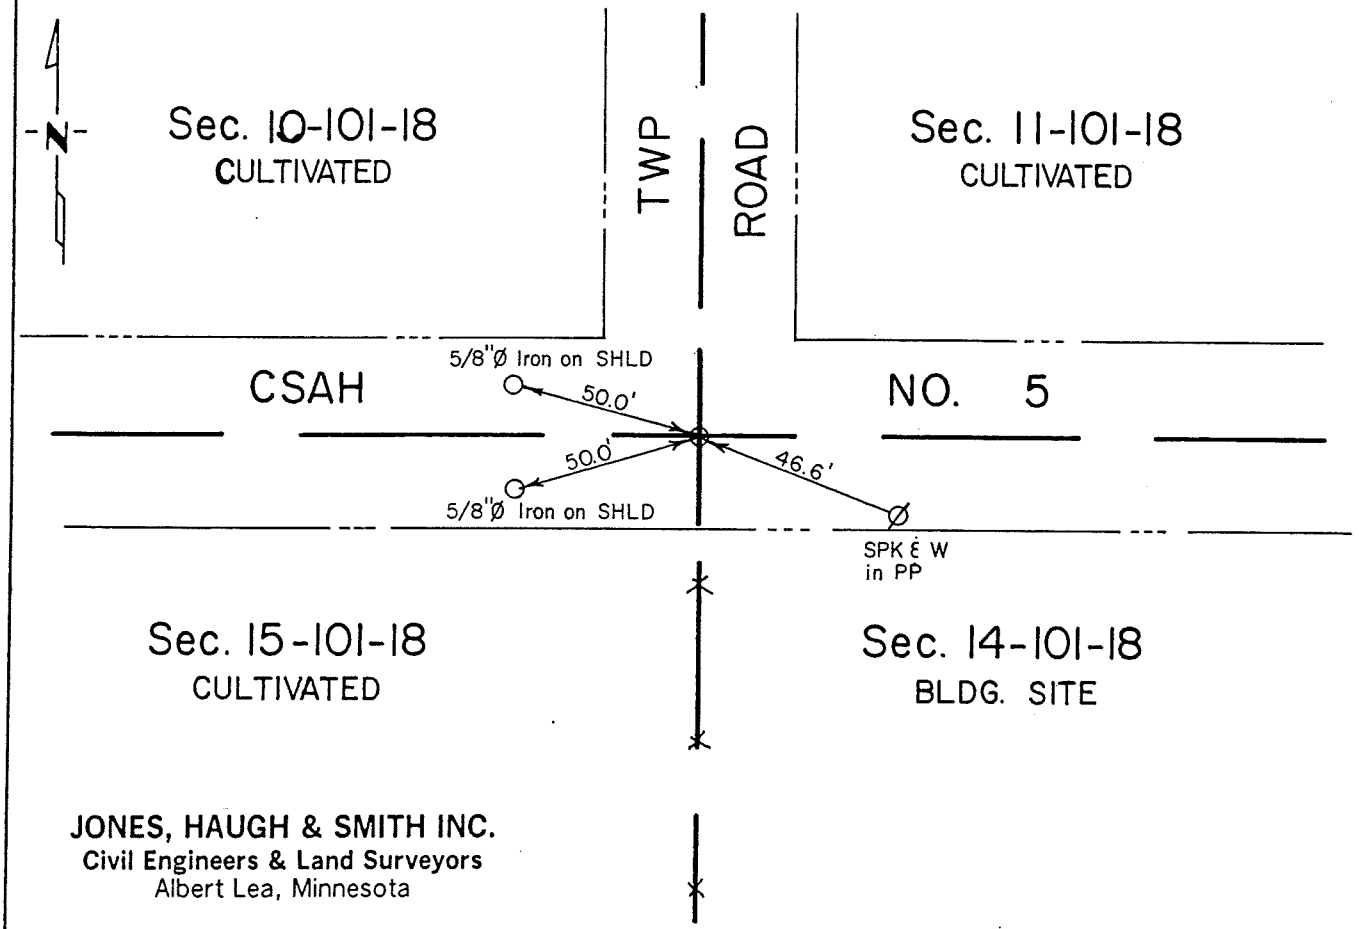

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-9-91 (DATE)

Registration No. 13907

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 11-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1987 Jones, Haugh & Smith Inc. crew dug with the Mower County backhoe on centerline centerline of north-east-west road and in line with fence south. Uncovered a 6" diameter concrete monument with a 3/4" diameter iron cast in center 3.5 feet below road surface. Placed a cast iron monument at road surface over concrete monument found.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte uncovered a cast iron monument 0.7' below road surface for Mower County Highway Department Grading Project County State Aid Highway #5 SAP #50-605-10. Left monument as found and new ties were recorded.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 11, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-18-1991 (DATE) found a CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

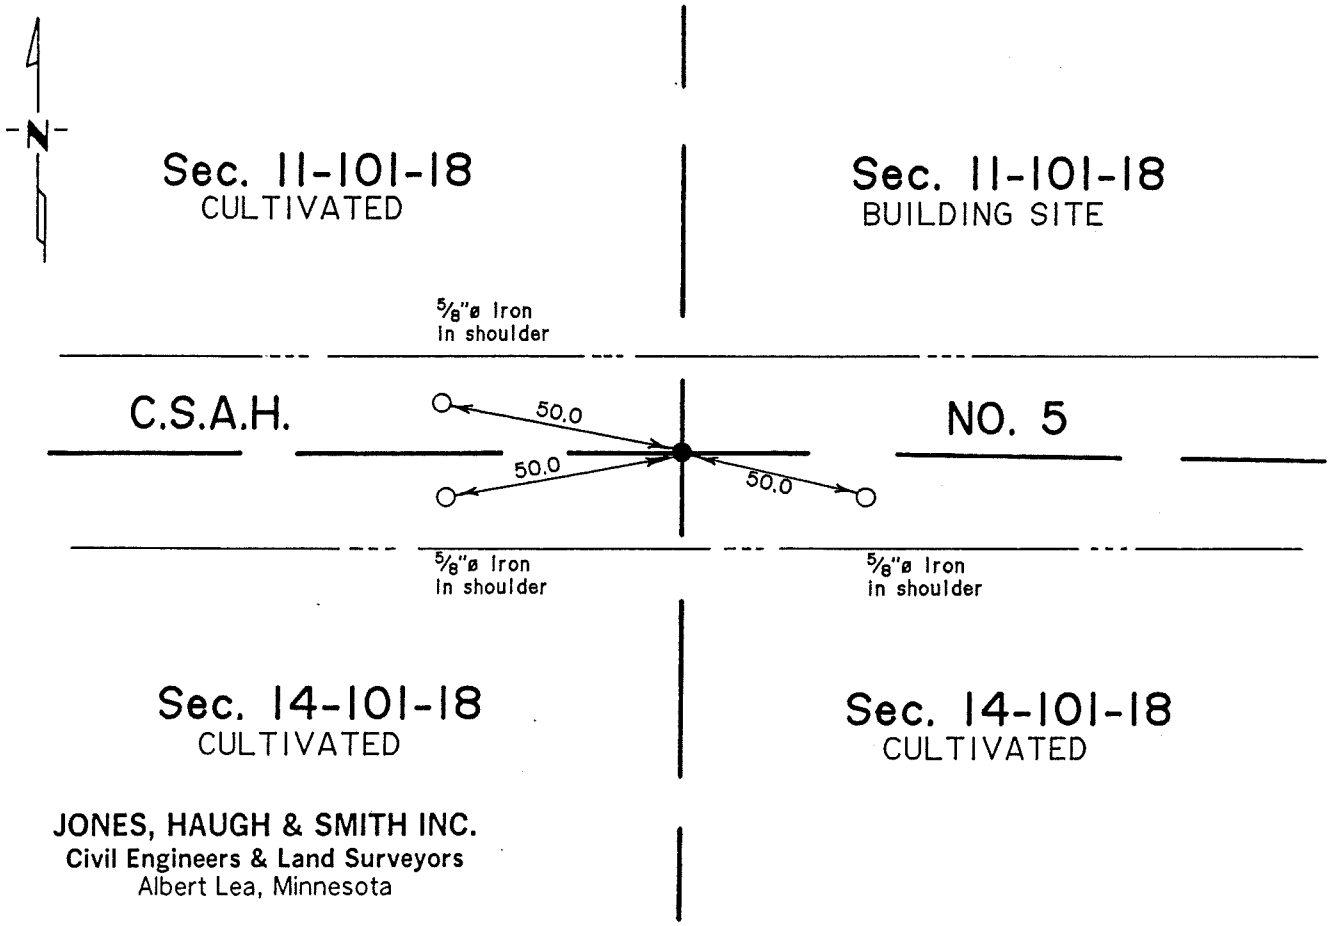

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 11-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1926 Grading plan shows corner was destroyed by a core cut in the location during grading project.

1987 Jones, Haugh & Smith Inc. crew placed a cast iron monument at midpoint on a straight line between section corners.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte uncovered a cast iron monument 0.5' below road surface for Mower County Highway Department Grading Project County State Aid Highway #5 SAP #50-605-10. Left monument as found and new ties were recorded.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 11, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-18-91 (DATE) found a 5/8"Ø iron 0.8' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-18-91 (DATE) placed a cast iron monument over 5/8"Ø iron found.

SKETCH OF REFERENCE TIES

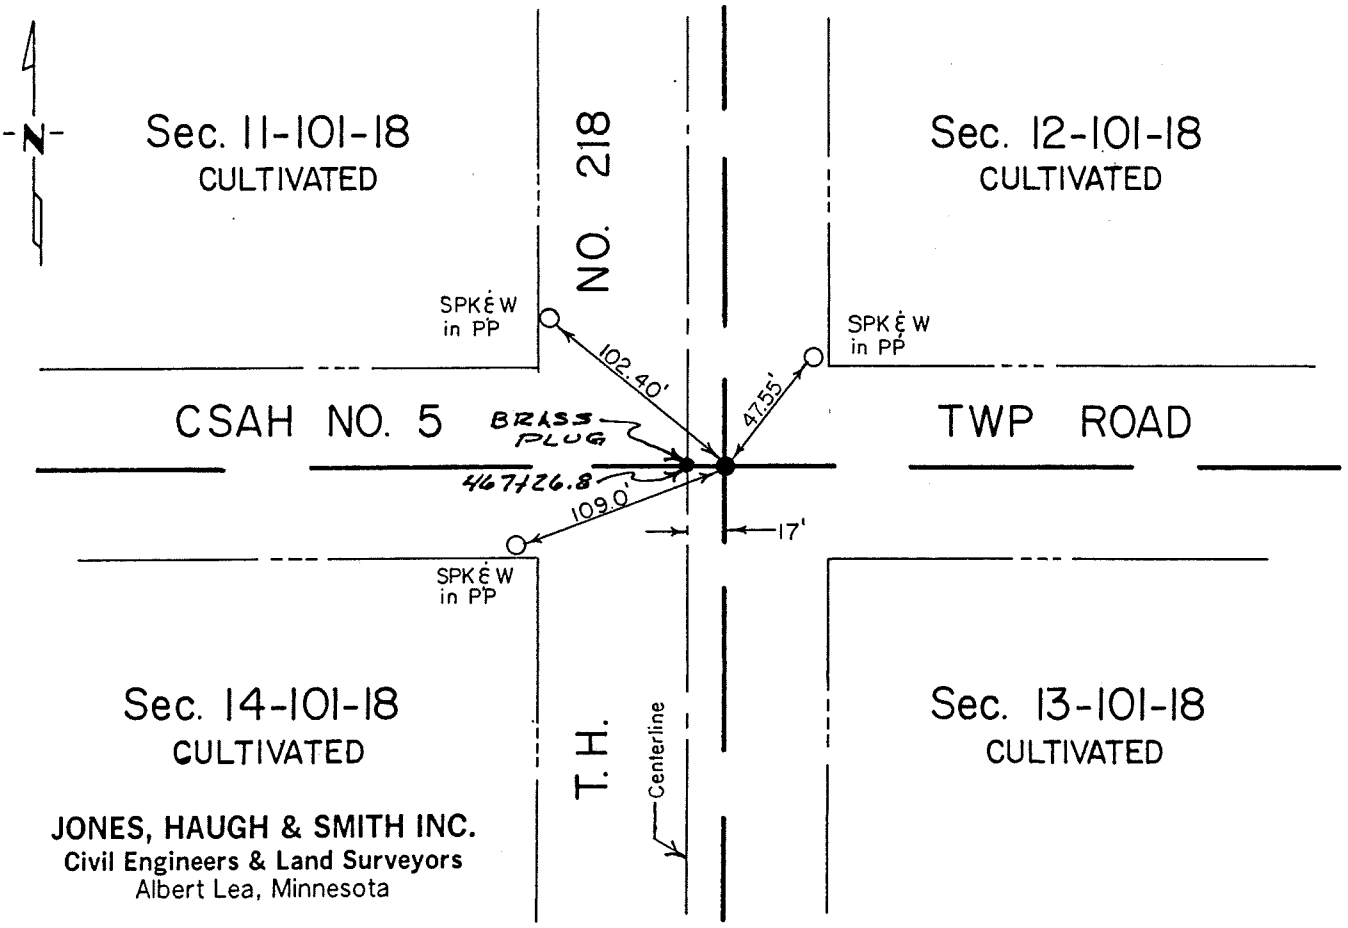

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 11-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1972 Jones, Haugh & Smith Inc. crew placed a 5/8" diameter iron using Highway Sta. from T.H. #218 R/W map which shows corner at Sta. 467 + 26.8 and 17.0'E of centerline PI (brass plug) which was located at time of survey in NE 1/4 SE 1/4 Sec. 11-101-18. The following ties were taken:

Spk & W PP NE 47.4'
Spk & W CFP SE 50.2'
Brass plug W 17.0'

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte uncovered a 5/8" diameter iron 0.8' below road surface for Mower County Highway Department. Grading project on County State Aid Highway #5 SAP #50-605-10. Placed a cast iron monument over iron found and new ties were recorded.

The monument fits occupation and road centerlines within the section and agrees with past records as best evidence of a perpetuation of the original public land survey corner.

Form 349 CHAPTER 359 LAWS ON 1921

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

G Lyle Twp.

Corner to Sec. 11, 12 T. 101N. R. 18W.

Tie Book Page 86

State of Minnesota } ss.
County of Mower }

I hereby certify that on Second day of June 19 29

I found the Quarter Corner between Sec. 11 and 12, T.101N., R.18W.

which was evidenced by Iron bar


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established

reference or witness monuments consisting of reference hubs

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

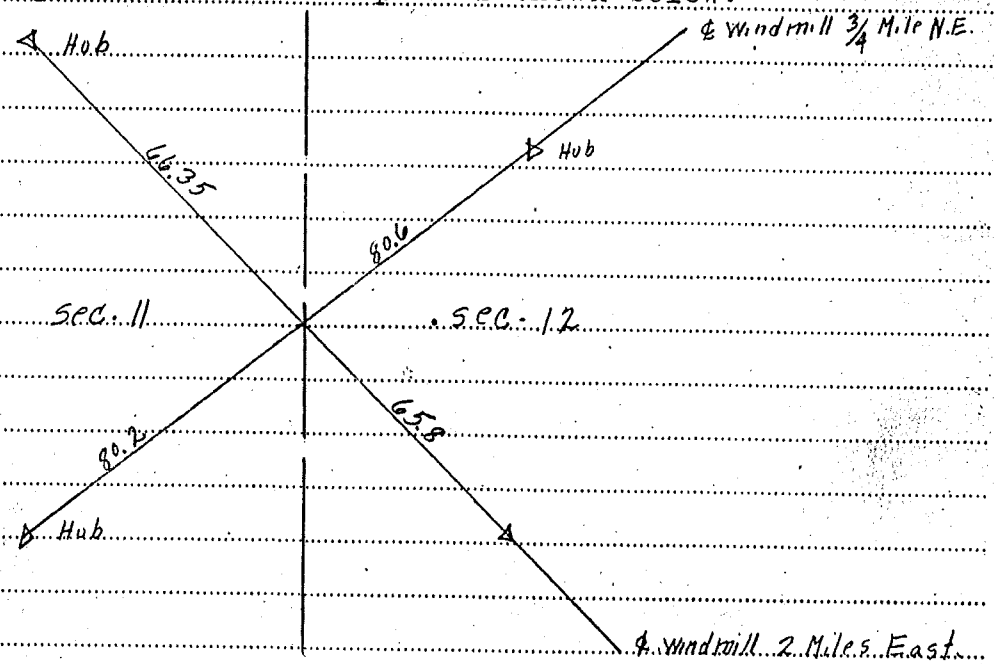

Dated at Austin Minn., this 3rd day of January 19 30

Resident Engineer

OFFICE OF REGISTER OF DEEDS } ss.
County of }

I hereby certify that the within instrument was filed in this office for record on the

day of A. D. 19 at o'clock M.

Register of Deeds

By Deputy

G

H

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 13, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/09/2001 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

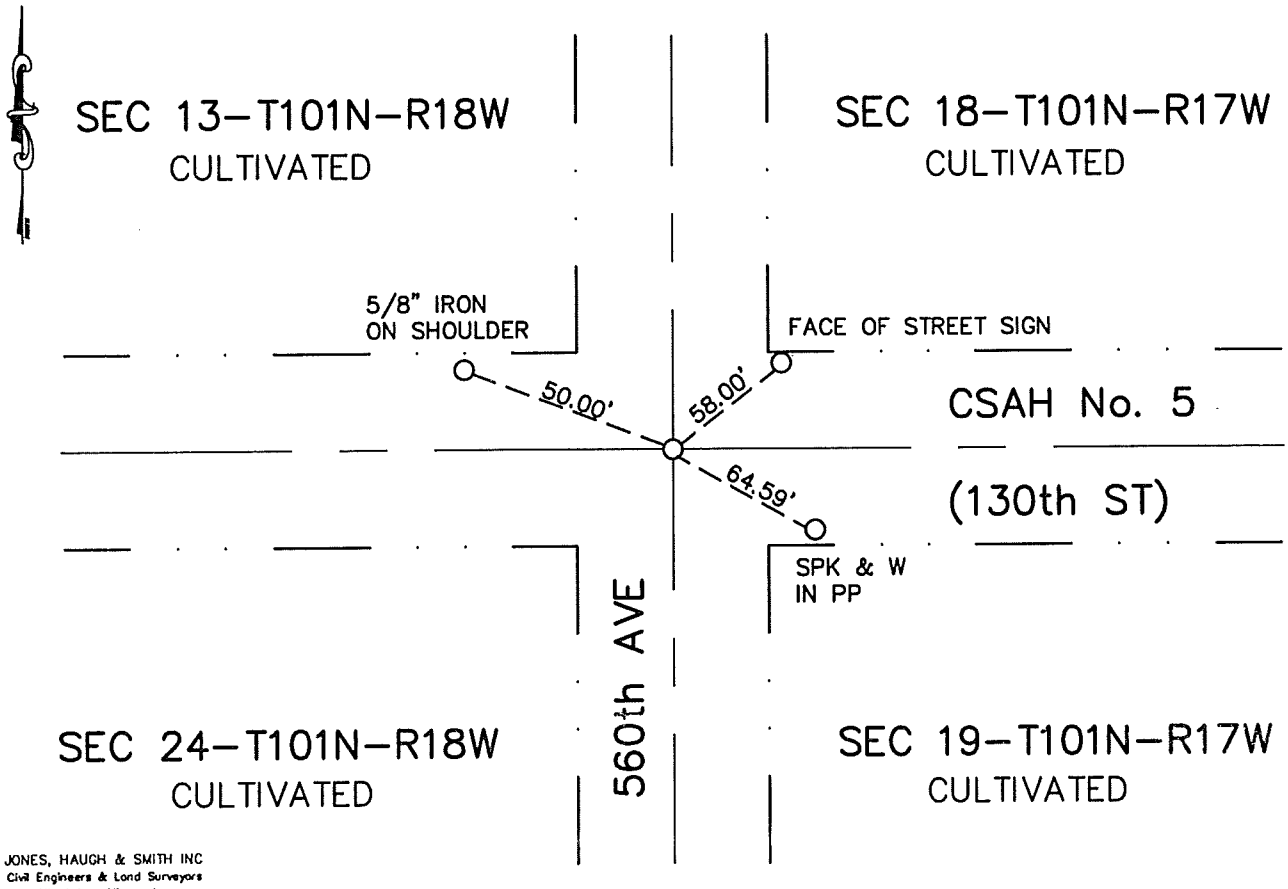

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-21-01
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 13-101-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1922 Mower County records show a stone inplace.

1967 Mower County records show a concrete monument over stone inplace.

2001 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of centerlines of CSAH No. 5 and Twp. Road. Uncovered a CIM, 0.60' below road surface. This location agrees with the 1922 and 1967 records. Accepted monument as a true perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 13, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/09/2001 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

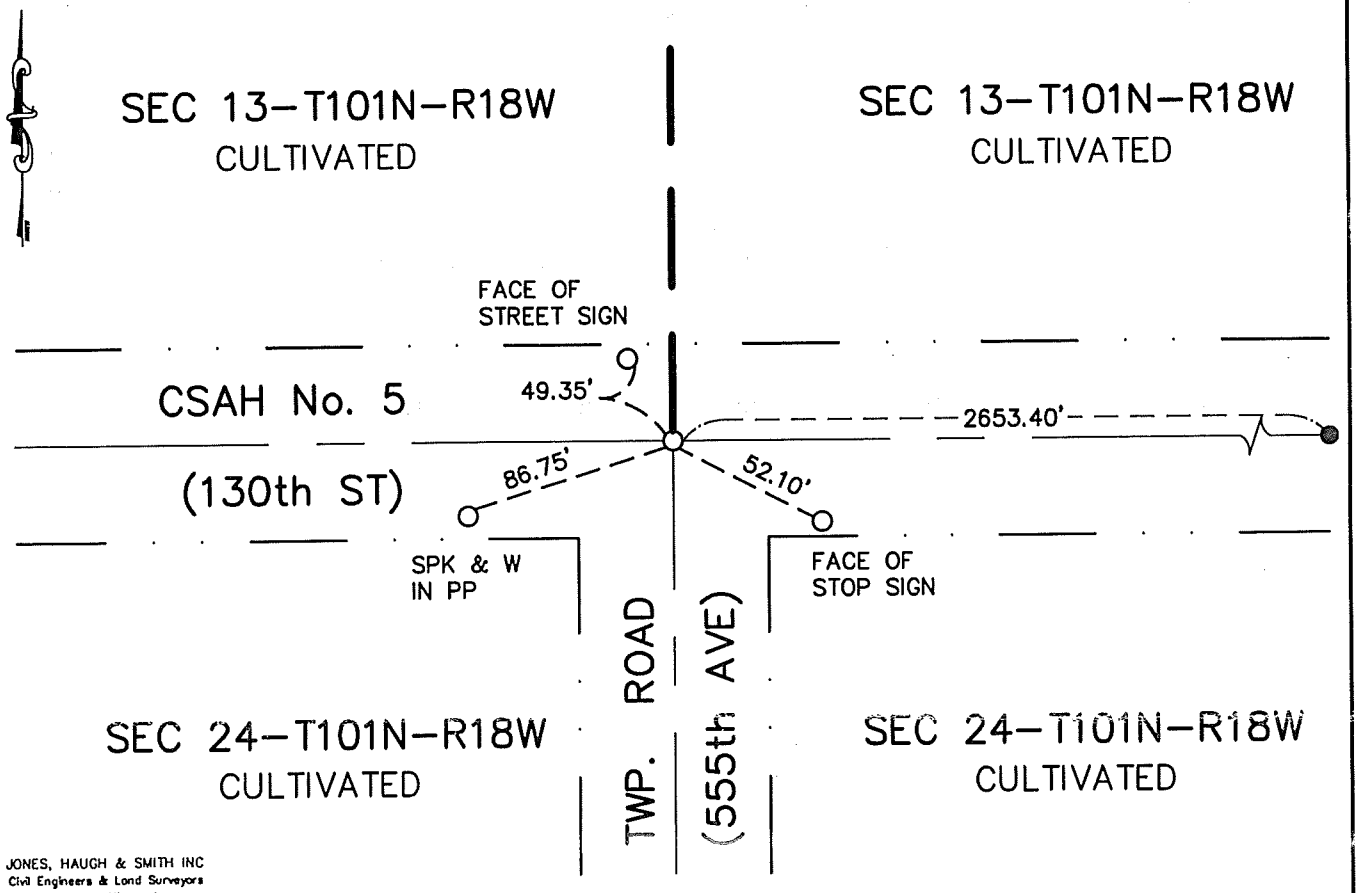

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 11-21-01 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S ¼ Cor Sec 13-101-18

Deputy Surveyor William I. Anderson of the U.S. General Land Office originally established this corner in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1969 Mower County Highway Dept. records shows a corner at this location. Corner was destroyed during road construction project, and not reset.

2001 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe, at the intersection of centerlines of CSAH No. 5 and Twp. Road south. Found no evidence of a perpetuation of the original PLS corner. Set corner using the county road plan distance of 2653.40' from the SE cor sec 13-101-18.Set a 5/8" iron with a CIM over it at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 14, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-17-91 (DATE) found a 5"sq. x 18" long pointed stone 3.5' deep in virgin soil.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-17-91 (DATE) placed a 5/8"Ø iron on South side of stone and set cast iron monument over stone on road surface.

SKETCH OF REFERENCE TIES

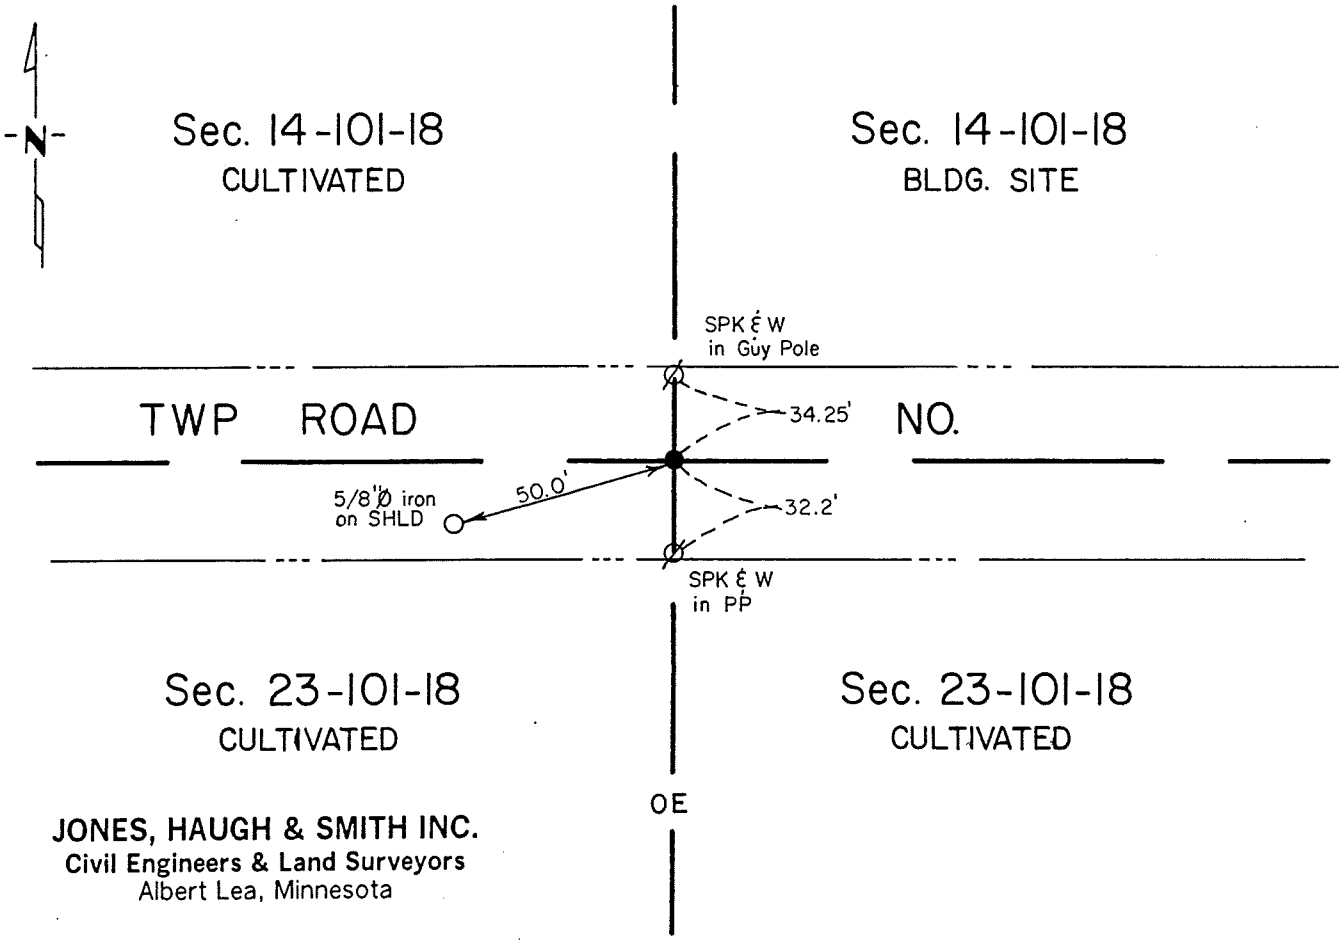

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Section 14-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No evidence was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the Mower County backhoe for the grading project County State Aid Highway #5 SAP #50-605-10. Dug on centerline of E-W road and field division/powerline south and uncovered a 5" sq. x 18" long pointed stone 3.5 below road surface in virgin soil. Placed a 5/8" diameter iron on south side of stone and set a cast iron monument at road surface over stone found.

The monument fits occupation and road centerlines within the section and agrees with past records as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 15, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-17-91 (DATE) placed a cast iron monument on ℄ of E-W roads in line with fences N-S.

SKETCH OF REFERENCE TIES

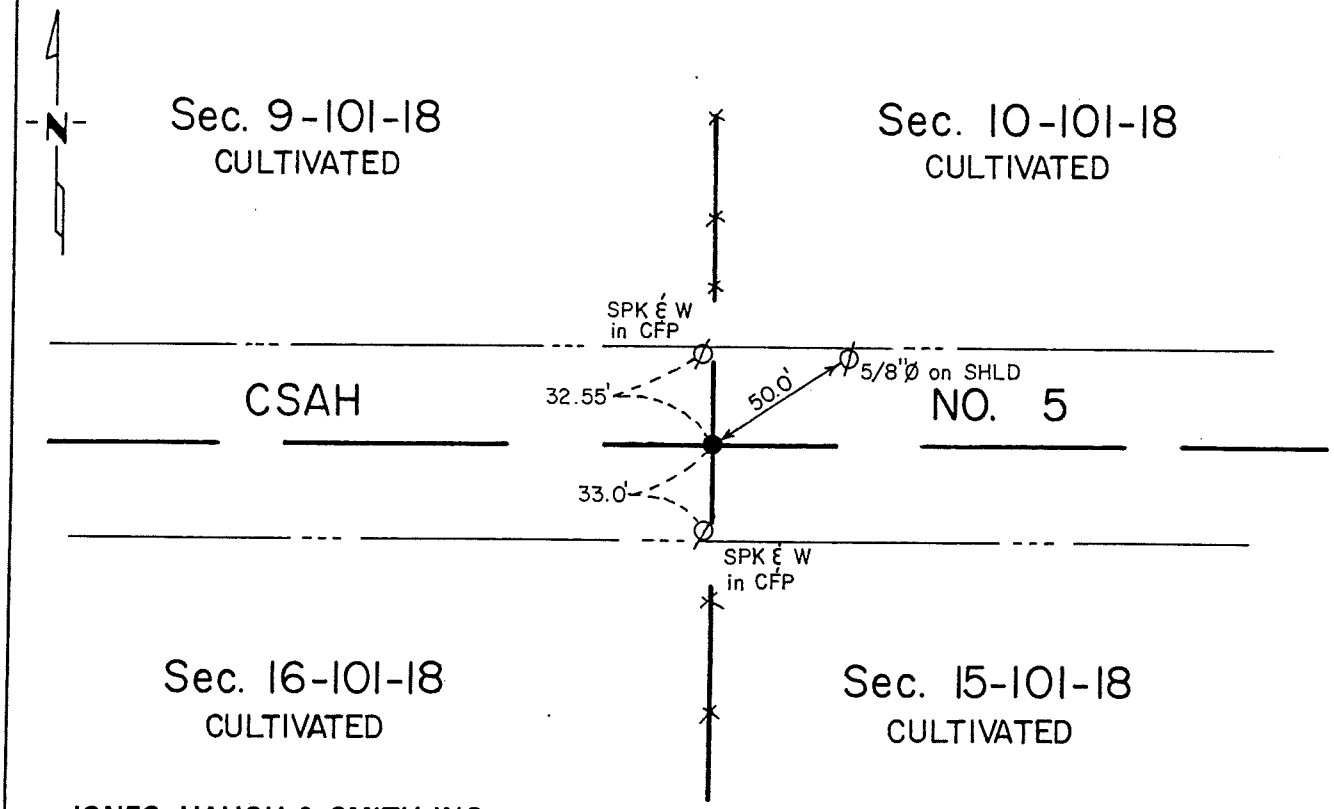

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-9-91 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 15-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	S 7°E	185 links (122.10 ft)
6" Burr Oak	N 85 1/2 °E	55 links (36.30 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support evidence of a perpetuation of the original public land survey corner.

1941 Book "A" in the office of Mower County Engineers indicates a corner was in place at Sta. 158 + 71.8 PI on centerline road in line with fence N-S. The following ties were taken:

50.5' N55°30'W to F.P.
35.9' S22°30'E to Oak tree
90.0' S76°00'E to Oak tree
46.9' N3°00'W to Oak tree

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the County backhoe for 1991 Grading Project on County State Aid Highway #5 SAP #50-605-10. Dug a 4'x12'x5' deep hole on centerline of E-W road in line with fences North and South and found no evidence of the public land survey corner. Placed a cast iron monument on centerline of E-W road in line with fence lines N-S using the obliterated method.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 15, Township 101N, Range 18 W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-7-91 (DATE) found a 3/4"Ø x 24" capped pipe

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-7-91 (DATE) placed a cast iron monument at location of 3/4"Ø pipe

SKETCH OF REFERENCE TIES

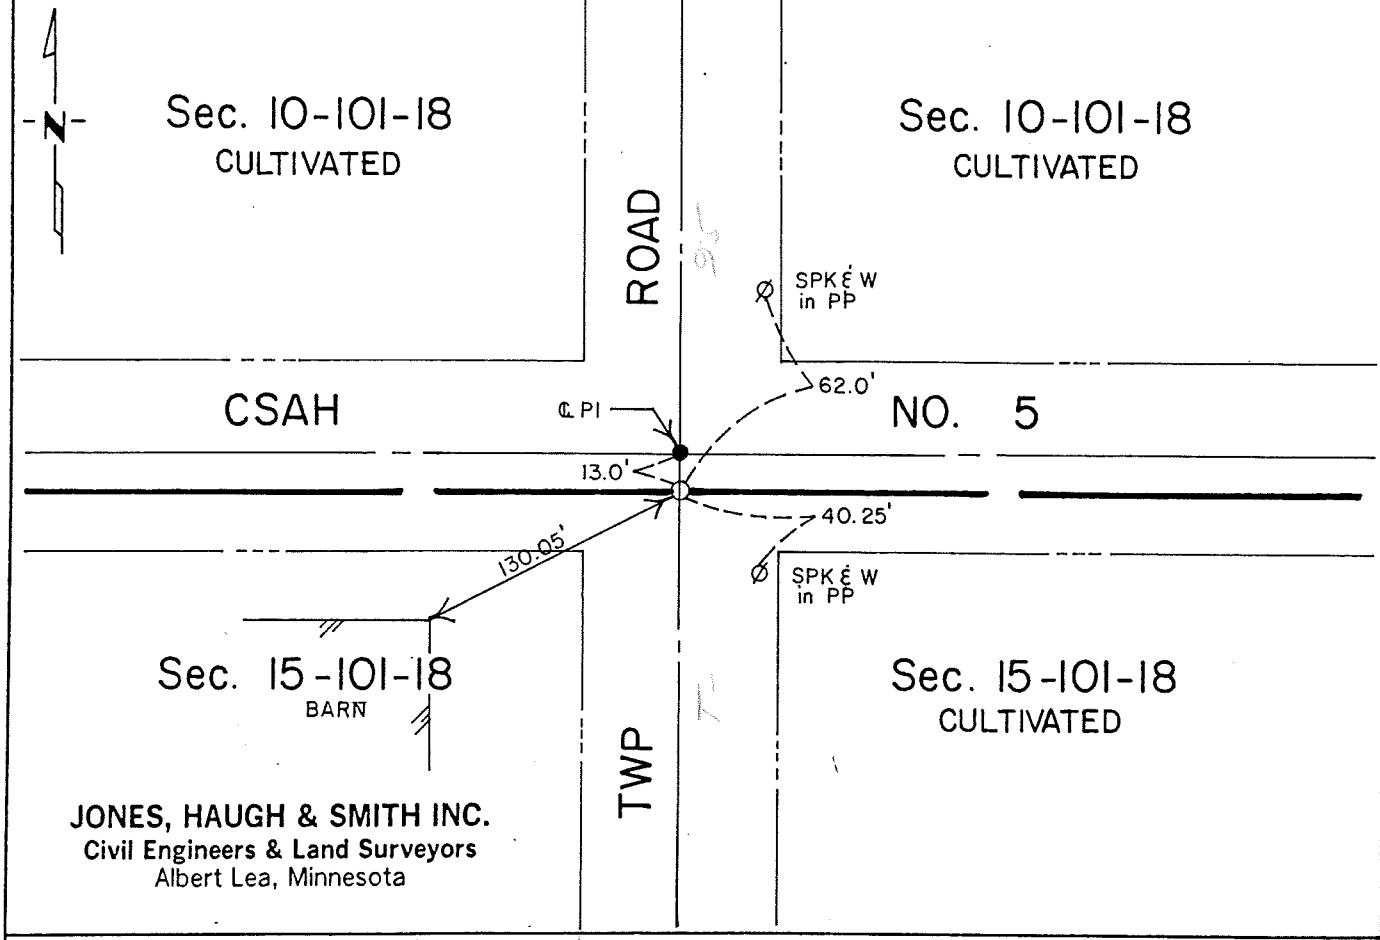

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-23-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 15-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

6" Burr Oak	N 43°W	130 links (85.80 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1922 Recorded in Book "A" in the office of the Mower County Engineer shows a corner inplace and the following ties were taken:

County Road centerline PI	13.0' North
FP 55.2 N 45°E	
FP 52.2 N 48 1/2°W	
TP 49.5 S 23°W	
Concrete FP 40.8 S 53°E	

1926 Grading Plan on County State Aid Highway #5 shows monument 13.0 feet south of the centerline PI.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the Mower County backhoe on centerline centerline of N-S-E-W roads in line for centerline PI and uncovered a 1/2" diameter iron over a 6" diameter concrete monument with a 1/2" diameter iron cast in center. Left monument as found and placed a 5/8" diameter x 18" iron capped over monument. We then excavated 13 feet south of this monument and uncovered a 3/4" diameter pipe capped RJO 11009. Removed pipe and continued digging. No further evidence was found of the public land survey corner.

The monument agrees with past records and fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 15, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-17-1991 (DATE) found a ½"ø IRON

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-17-1991 (DATE) placed a CAST IRON MONUMENT OVER ½"ø IRON ON ROAD SURFACE.

SKETCH OF REFERENCE TIES

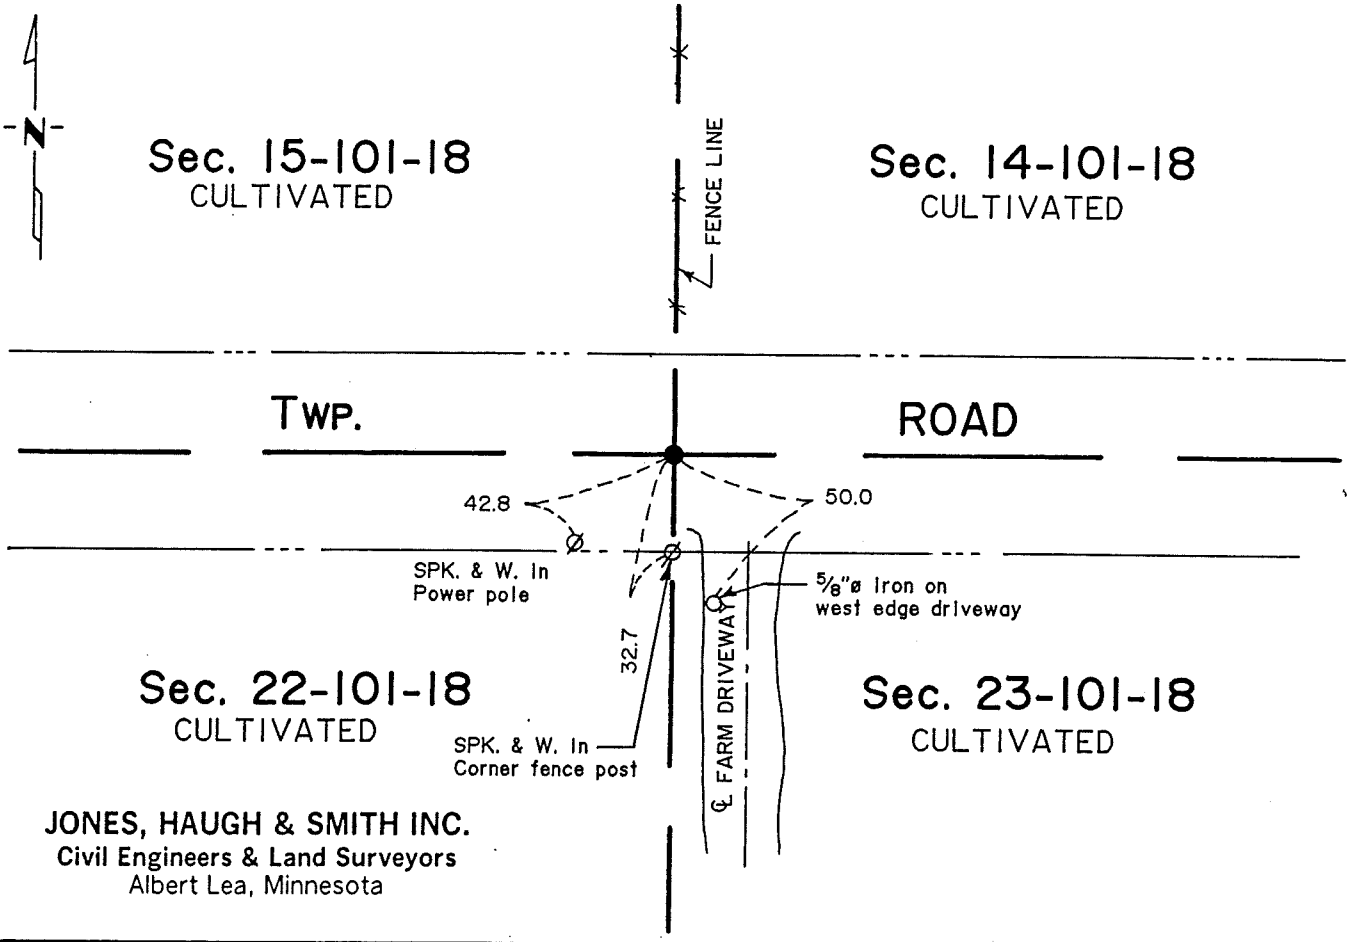

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 5-9-91 DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Section 15-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No evidence was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the County backhoe for 1991 Grading Project on County State Aid Highway #5 SAP #50-605-10. Dug a 4'x10'x5' deep hole and uncovered a 1/2" diameter x 3' iron two feet below road surface. Continued digging and found no further evidence of the public land survey corner. Placed a cast iron monument at location of 1/2" diameter iron 0.5 feet below road surface.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 16, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 4-17-91 (DATE) found a cast iron monument 0.8' deep in new bituminous grade.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4-17-91 (DATE) placed a cast iron monument flush with road surface over monument found.

SKETCH OF REFERENCE TIES

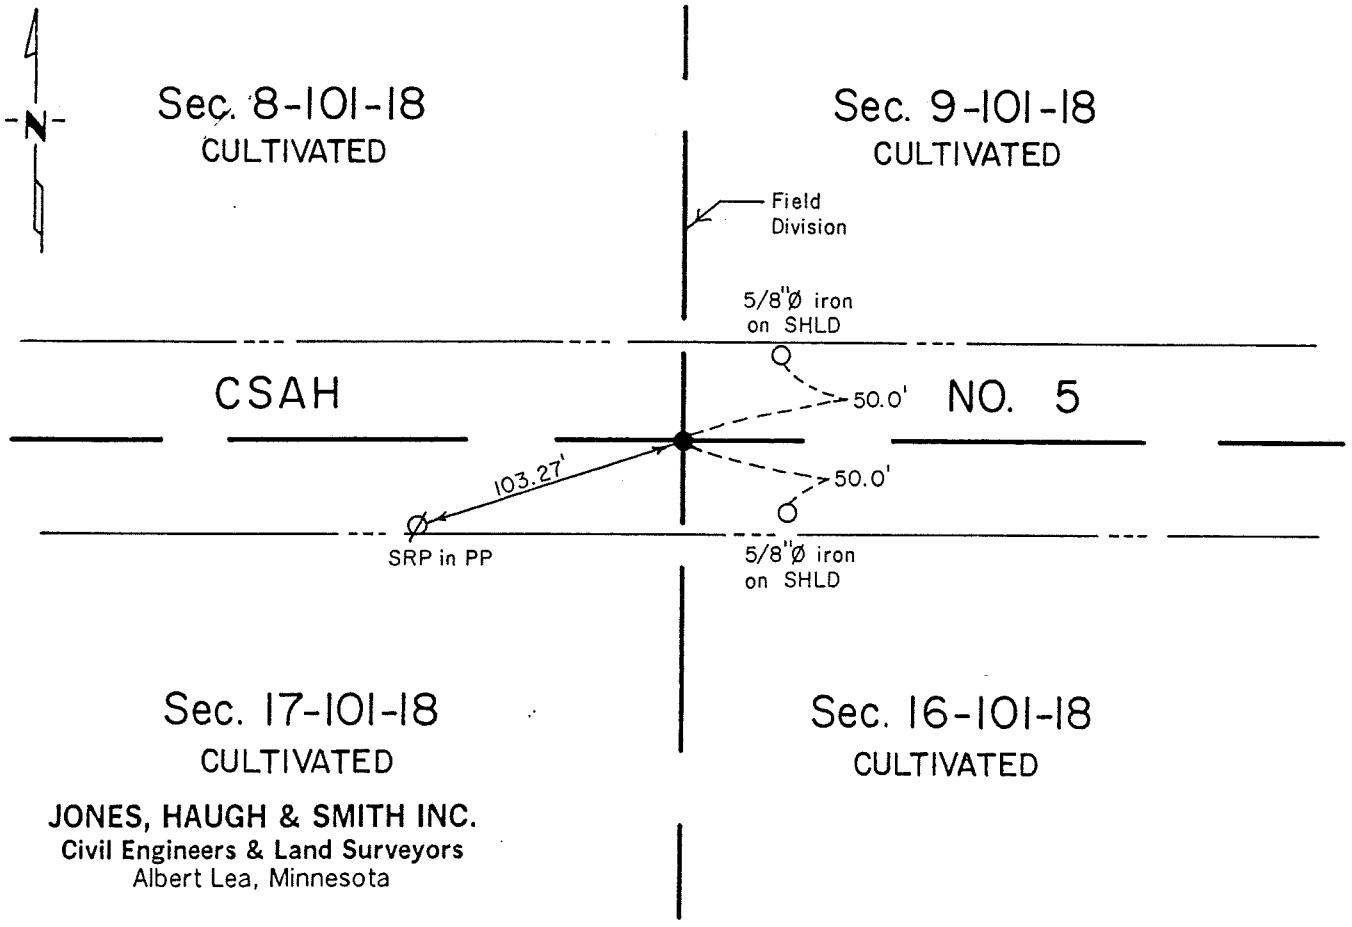

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 16-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the County backhoe for 1991 Grading Project Mower County Highway Department Grading Project County State Aid Highway #5 SAP #50-605-10. Excavation uncovered a cast iron monument 0.8' below a new bituminous grade. Placed a cast iron monument flush with road surface over monument found.

The monument found was placed by MHD during a survey project on TH #105 1/4 mile more or less, east of corner. In 1976 a corner certificate was filed by Marlow McGowan RLS 11527 in Mower County Recorder's Office on this corner.

The monument fit occupation and road centerlines within the section and agrees with the 1976 corner certificate and is accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 16, Township 101N, Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-17-91 (DATE) found a harrison cast iron monument 1.5' below road surface over a 1"Ø iron and wood stake 3' deep in virgin soil.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

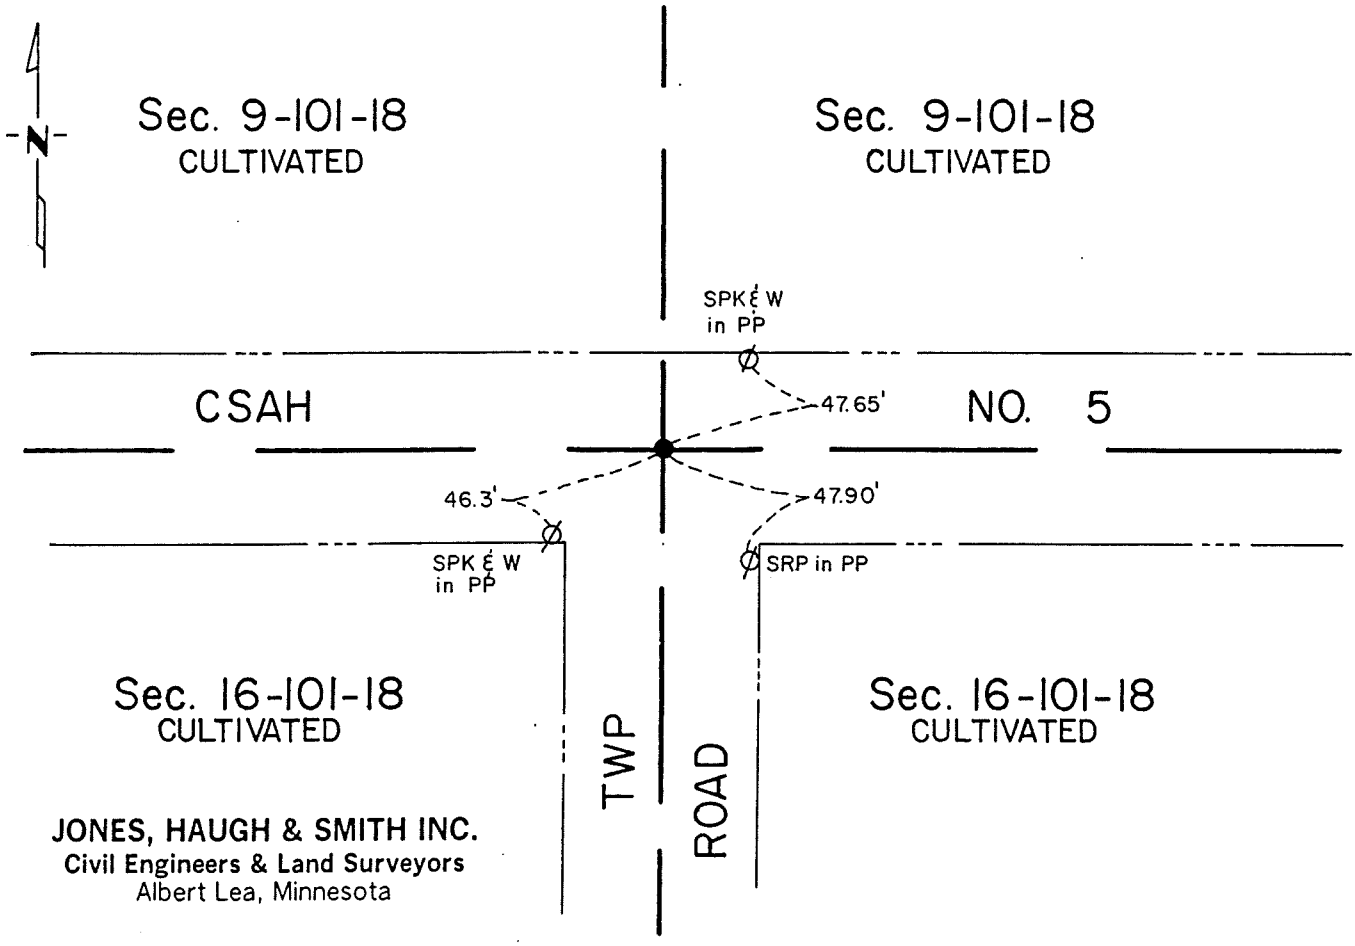

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-9-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 16-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1853. The government notes show a wood post and a charred stake were set with a mound of earth and trench. The following ties were taken:

14" Burr Oak S 84 1/4°E 273 links (180.18 ft)

The following were contacted for section corner information:

Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc. crew under the direction of John Schulte dug with the County backhoe for 1991 Mower County Highway Department Grading Project County State Aid Highway #5 SAP #50-605-10. A harrison cast iron monument was found 1.5' below road surface. Continued digging and uncovered a 7/8" diameter iron and wood stake 3' deep in virgin soil. Reset cast iron monument as found.

The cast iron monument found was set by MHD in 1976 and a certificate by Marlow McGowan RLS #11527 was filed in Mower County Recorder's Office.

The monument found fits occupation and road centerlines within the section and agrees with the 1976 corner certificate and is accepted as a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 17, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/29/1992 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/29/1992 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

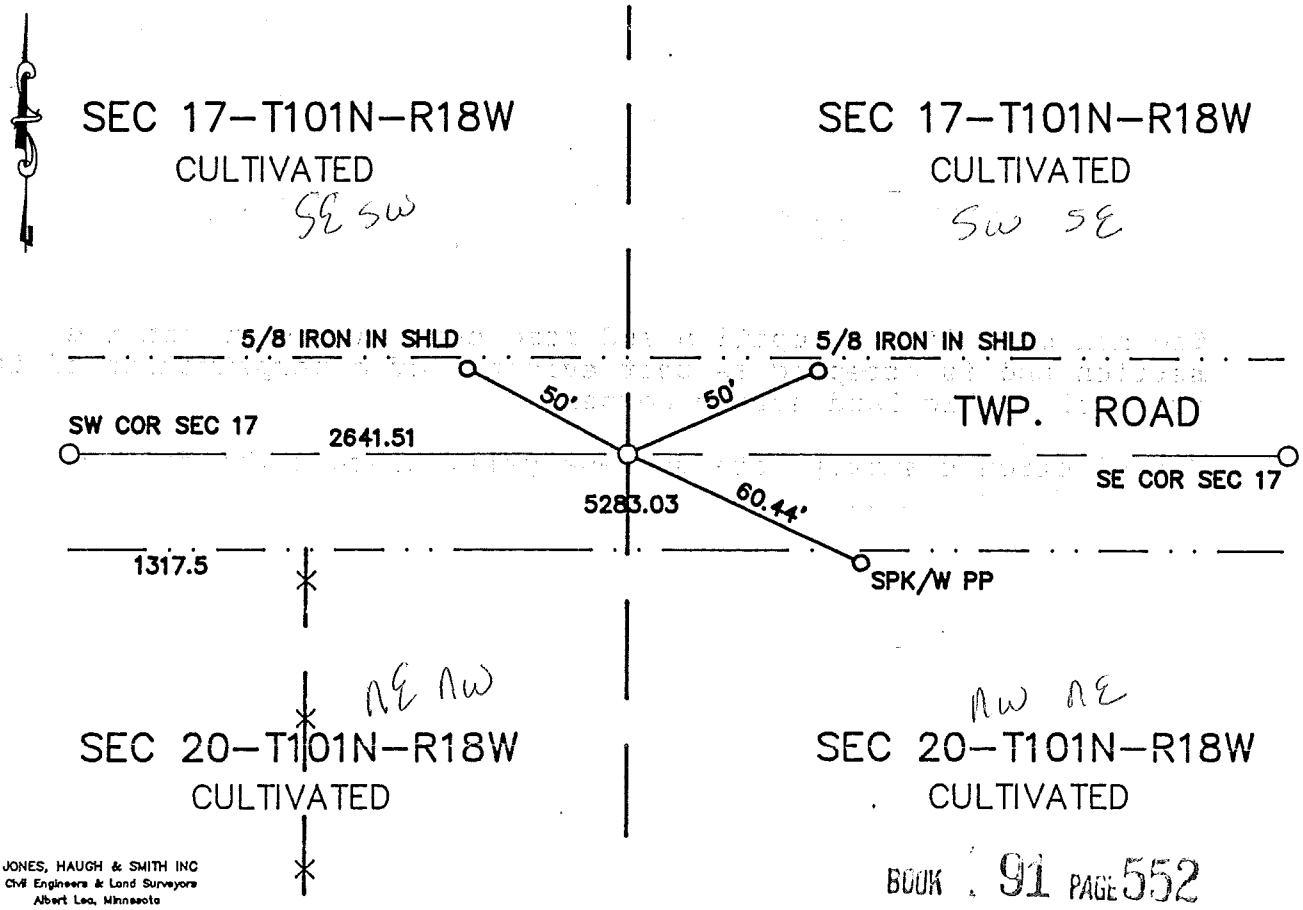

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 552

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-19-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 446545

M.H.D. FORM NO. 2105

Book 91 Misc Page 552

S 1/4 Cor SEC 17-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1992 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL twp. road at midpoint of the south line of the section. No evidence of the corner was found. Set a cast iron monument on CL of the road at the midpoint of south line of said section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 18, Township T101N, Range R18W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-31-94 (DATE) found a CON. MON. 1.5' BELOW ROAD SURFACE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-31-94 (DATE) placed a CAST IRON MON. OVER CON. MON. FLUSH WITH ROAD SURFACE.

SKETCH OF REFERENCE TIES

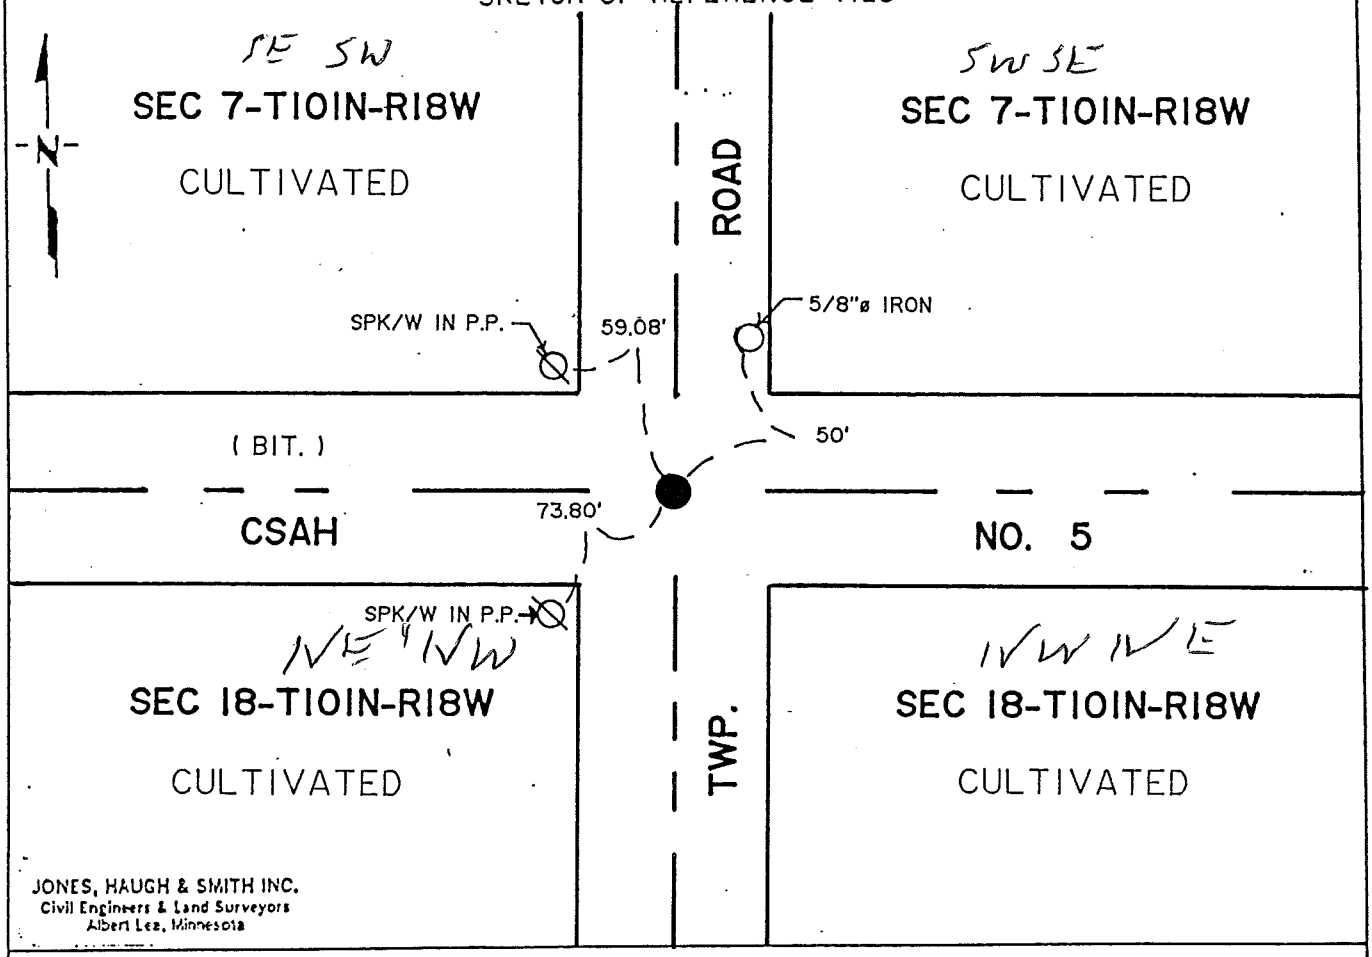

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 9-09-94
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 13 day of Sept A.D., 1994

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431916

Bk 84 Mrg. 431

M.H.D. FORM NO. 2105

BOOK 84 PAGE 431

STATEMENT OF EVIDENCE

N 1/4 corner Section 18-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.

Mower County Highway Department grading plans show a concrete monument at the corner.

1994 Jones, Haugh & Smith crew dug a trench in the area of the corner with a backhoe. A concrete monument was found 1.5 feet beneath the road surface. The concrete monument has been used to mark the corner position for over 40 years and has been perpetuated by other surveyors.

The concrete monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 84 PAGE 432

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 18, Township T10IN, Range R18W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-31-94 (DATE) found a CON. MON. WITH A 5/8"ø IRON STICKING UP 1". 2' BELOW ROAD SURFACE.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-31-94 (DATE) placed a CAST IRON MON. OVER CON. MON. FLUSH WITH ROAD SURFACE.

SKETCH OF REFERENCE TIES

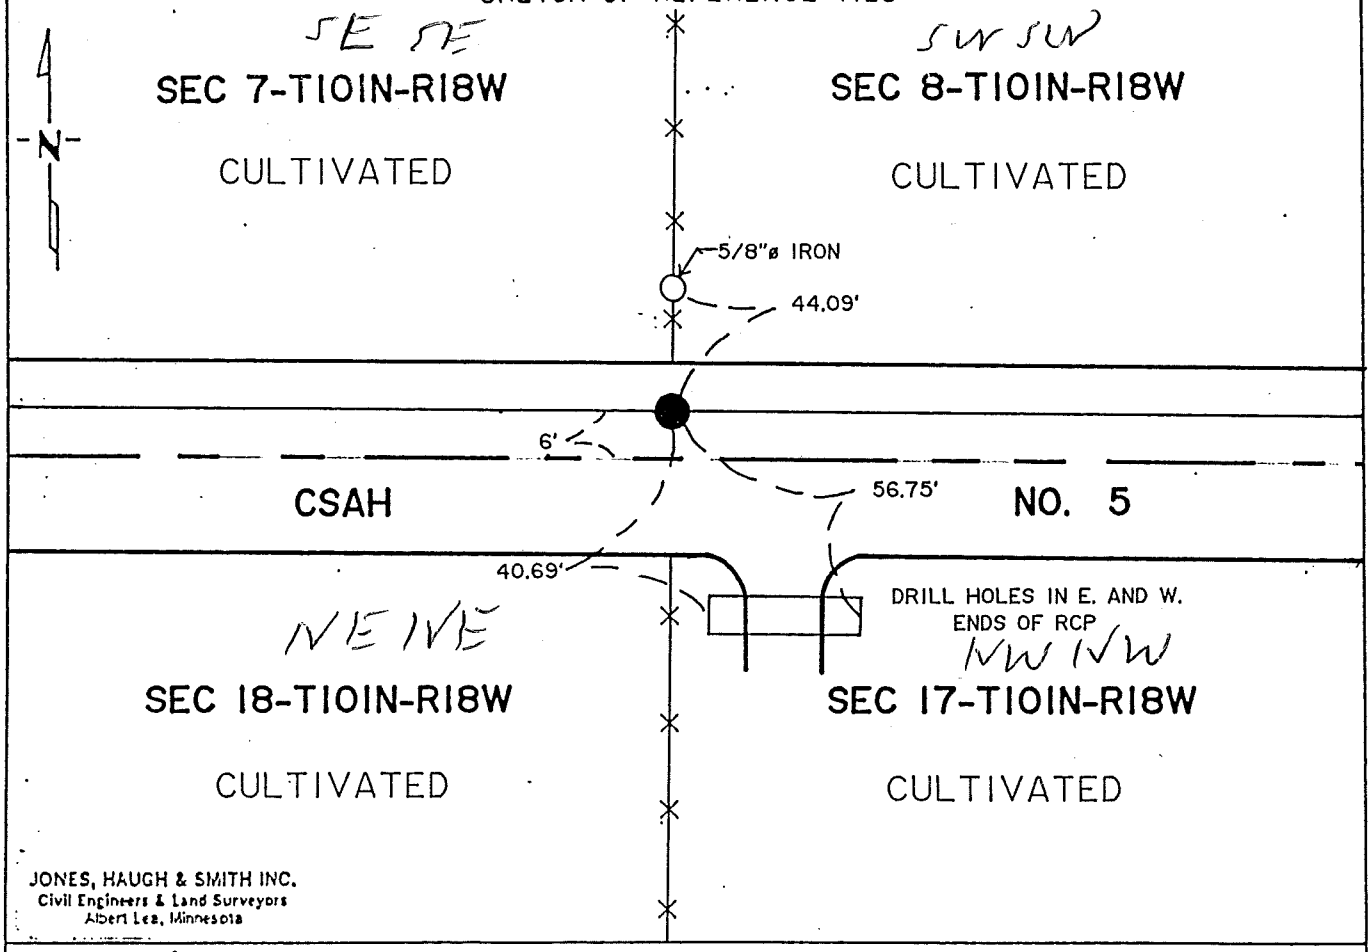

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] (SIGNATURE) 9-8-94 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 13 day of Sept A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431918

Bk 84 Misc Pg. 435

M.H.D. FORM NO. 2105

BOOK 84 PAGE 435

STATEMENT OF EVIDENCE

NE corner Section 18-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.

Mower County Highway Department grading plans show a concrete monument at the corner six feet north of centerline of CSAH No. 5.

1994 Jones, Haugh & Smith crew dug a trench at the corner location with a backhoe. A concrete monument was found 2 feet below the road surface. The concrete monument has been used to mark the corner location for over 40 years and has been perpetuated by other surveyors.

The concrete monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 84 PAGE 436

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 18, Township T101N, Range R18W, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 8-31-94 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 8-31-94 (DATE) placed a CAST IRON MON. AT CENTER LINE, CENTER LINE OF THE TWO TWP. ROADS.

SKETCH OF REFERENCE TIES

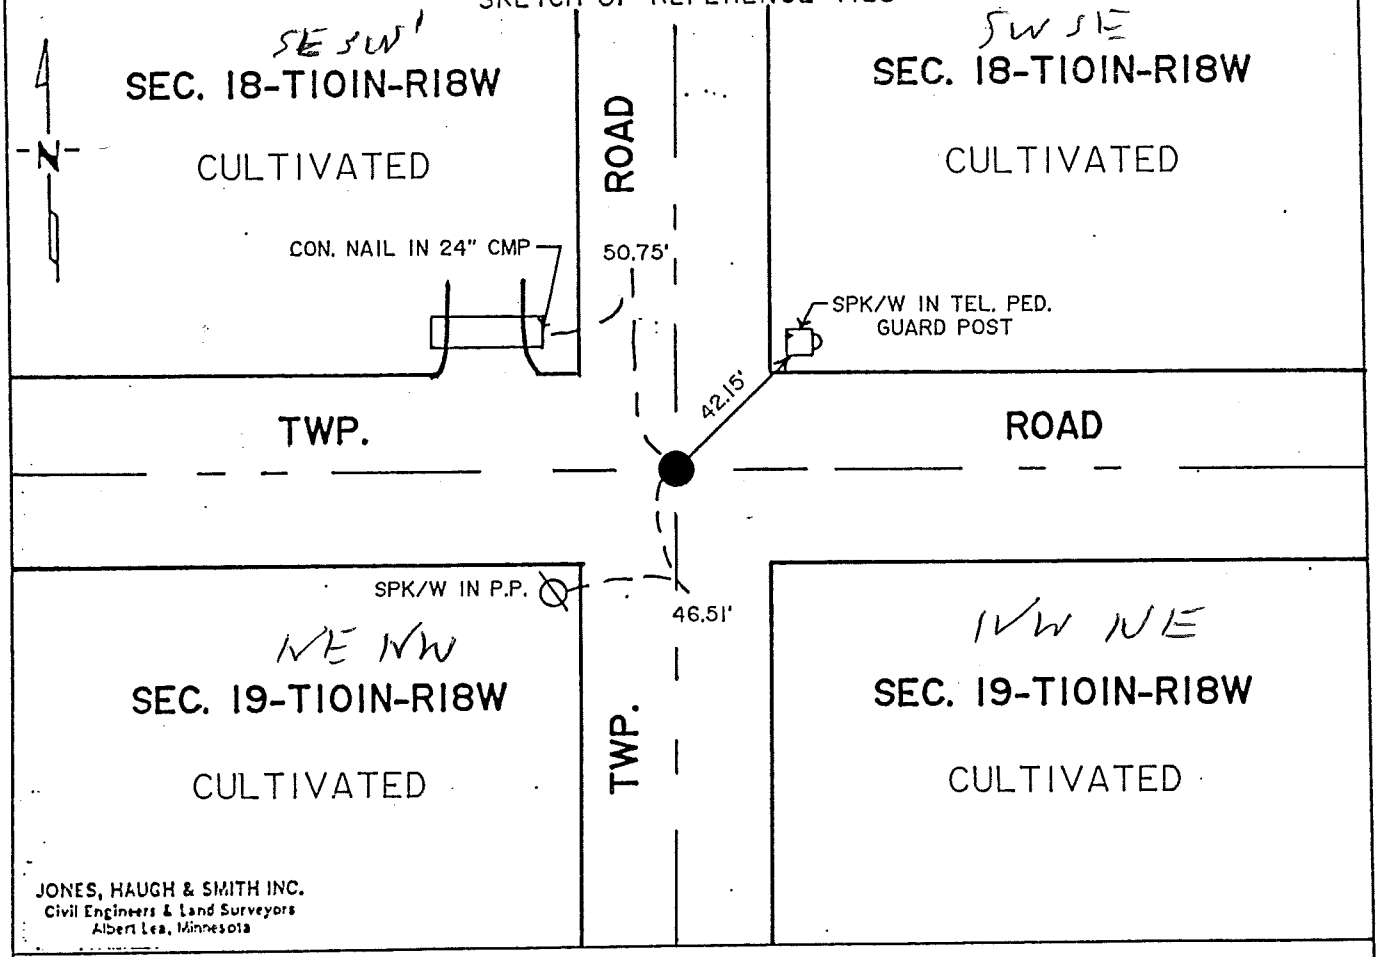

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-8-94

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P.M. on the 12 day of Sept A.D., 1994

COUNTY RECORDER Charles Enger

By Marlene Martin, Deputy

DOCUMENT NO. 431917

Bk 84 Misc, Pg. 433

M.H.D. FORM NO. 2105

BOOK 84 PAGE 433

STATEMENT OF EVIDENCE

S 1/4 corner Section 18-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.

1994 Jones, Haugh & Smith crew dug a trench at the corner location with a backhoe. No evidence of monumentation of the original public land survey corner was recovered. The intersection of centerlines of the township roads were accepted as the best remaining evidence of the location of the corner.

The centerline intersection fits occupation and other road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

BOOK 84 PAGE 124

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 18, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/15/95 (DATE) found a MN DNR MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/15/95 (DATE) placed a –

SKETCH OF REFERENCE TIES

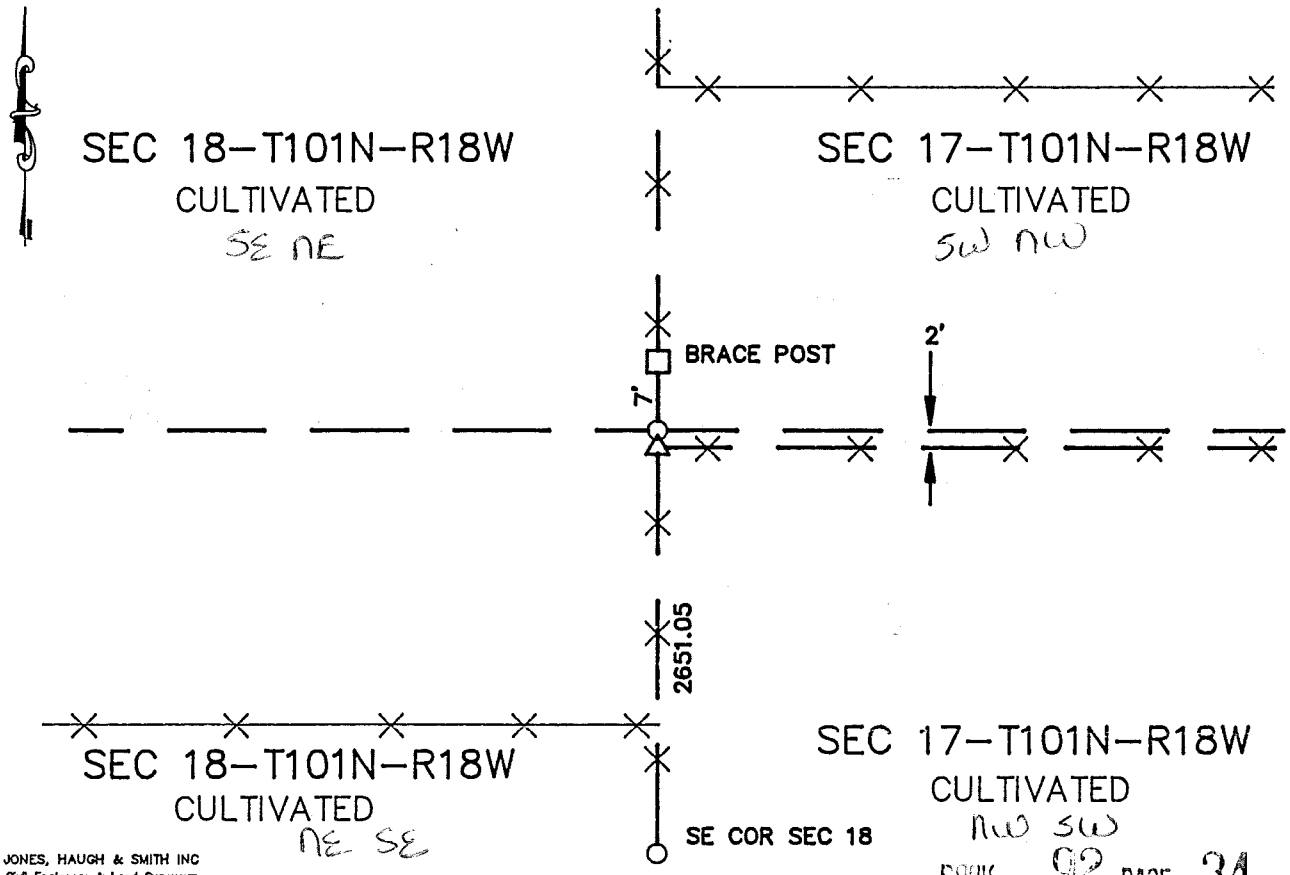

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 34

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446679

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger
By _____, Deputy
DOCUMENT NO. 446679

M.H.D. FORM NO. 2105

Book 92 Page 34 Misc

E 1/4 Cor SEC 18-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found Minnesota Department of Natural Resources monument 2' north of corner fence post. Accepted monument as a perpetuation of the original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 26, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/11/1999 (DATE) found a C I M 10' NORTH OF ROAD CENTERLINE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

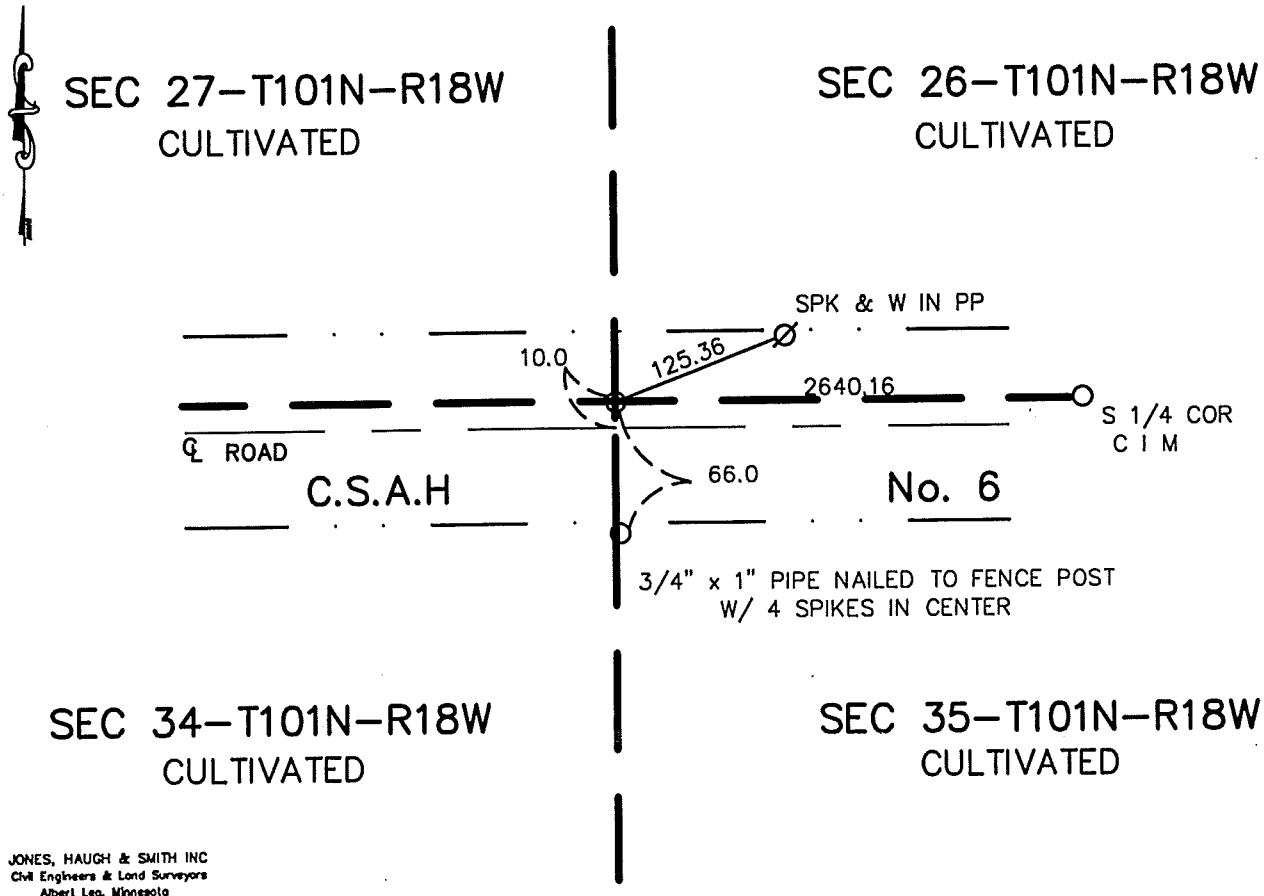

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-8-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SW Cor Sec 26-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1974	Mower County records state R.R. spike was placed.
1983	Corner was dug for with backhoe by Mower County personnel prior to road grading project. The corner was located and ties taken. After road-grading project was completed a Cast Iron Monument was set 10'+/- north of centerline of C.S.A.H. #6 using ties taken in 1983.
1999	Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, and uncovered C I M 10'+/- north of centerline of road. Took new ties. This position is in agreement with current road grading plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 26, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 11/11/1999 (DATE) found a C I M on centerline of road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

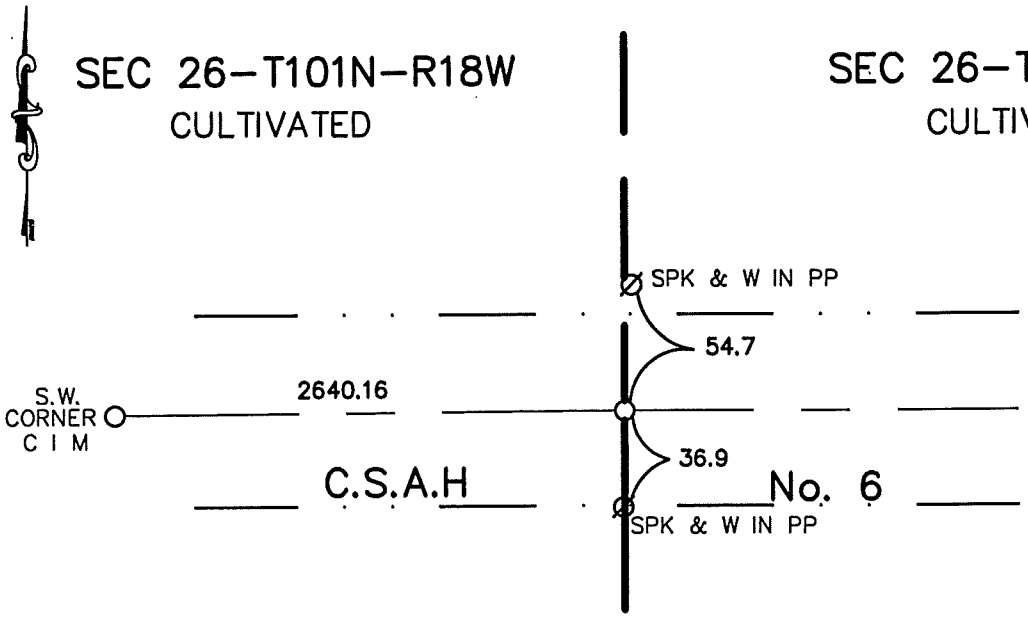

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-8-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 26-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1983 Corner was dug for with backhoe by Mower County personnel prior to road grading project the corner was located and ties taken. After the road-grading project was completed a Cast Iron Monument was set using ties taken in 1983.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, and uncovered C I M on centerline of road. Took new ties. This position is in agreement with the current road-grading plan.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a NO EVIDENCE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 7-29-92 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

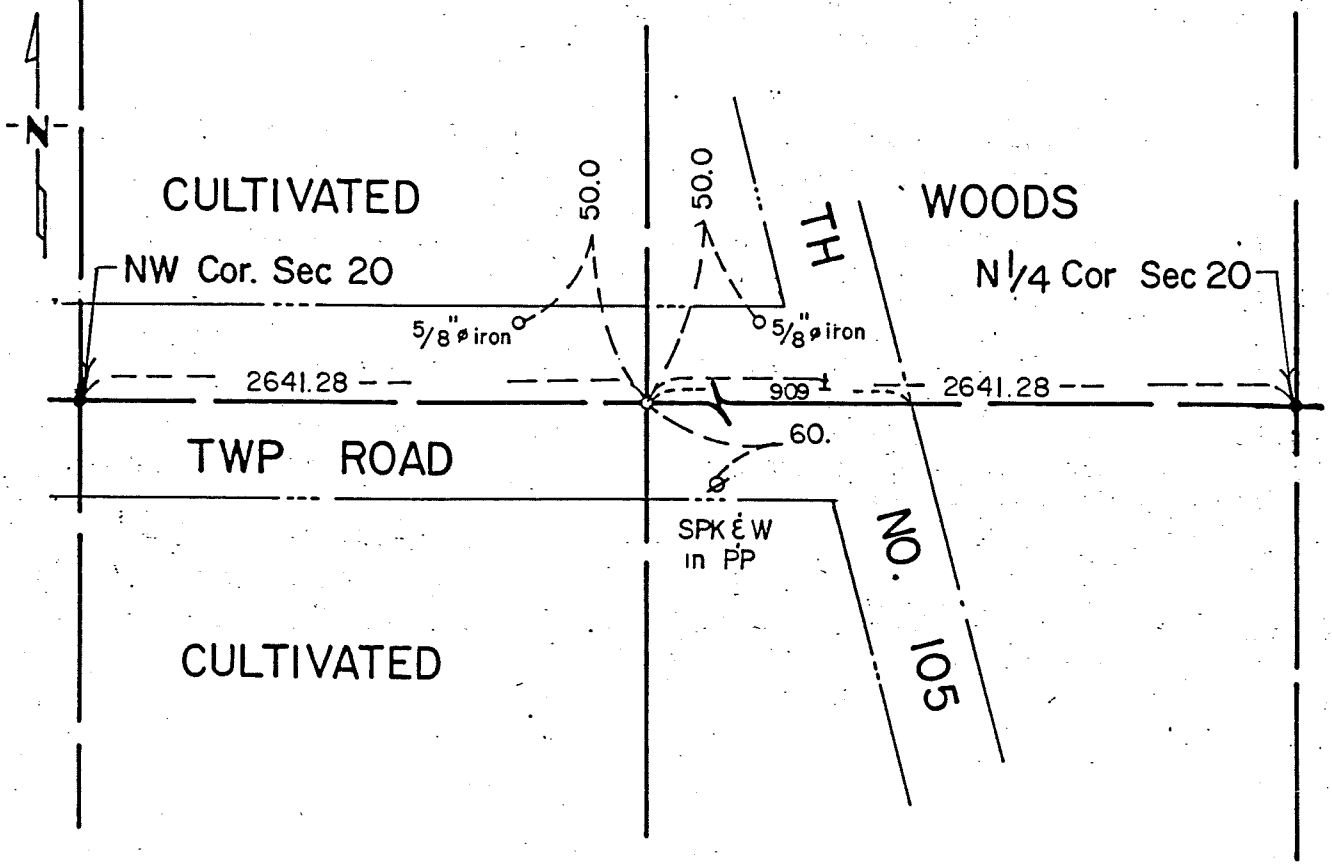

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-23-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Sec 20-101-18

This corner was original established by Deputy Surveyor Wm. I. Anderson of the US General Land Office in 1854. The government notes show a wood post was set and a mound of earth was raised.

The following were contacted for section corner information:
Mower County Engineering Dept
Mower County Recorder's Office
Minnesota Department of Natural Resources
Minnesota Department of Transportation
Yaggy, Colby & Associates

1964 Minnesota Department of Natural Resources used centerline of road and fence intersection for this position.

1992 Jones, Haugh & Smith Inc personnel under the direction of John Schulte IV, dug with the Mower County backhoe on centerline of existing township road at a temporary position at the mid-point between the northwest and northeast corner of Section 20 using chaining notes obtained from Minnesota Department of Natural Resources. A 6'x20'x4' deep hole was dug and no evidence was found. Therefore we established position of corner at the midpoint between section corners on the centerline of east-west road and set a cast iron monument.

This position fits existing occupation lines within the section and is the best evidence of the original location.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 7-29-92 (DATE) found a 2½" cast head over a ¾" pipe set by MN. CONS. DEPT.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

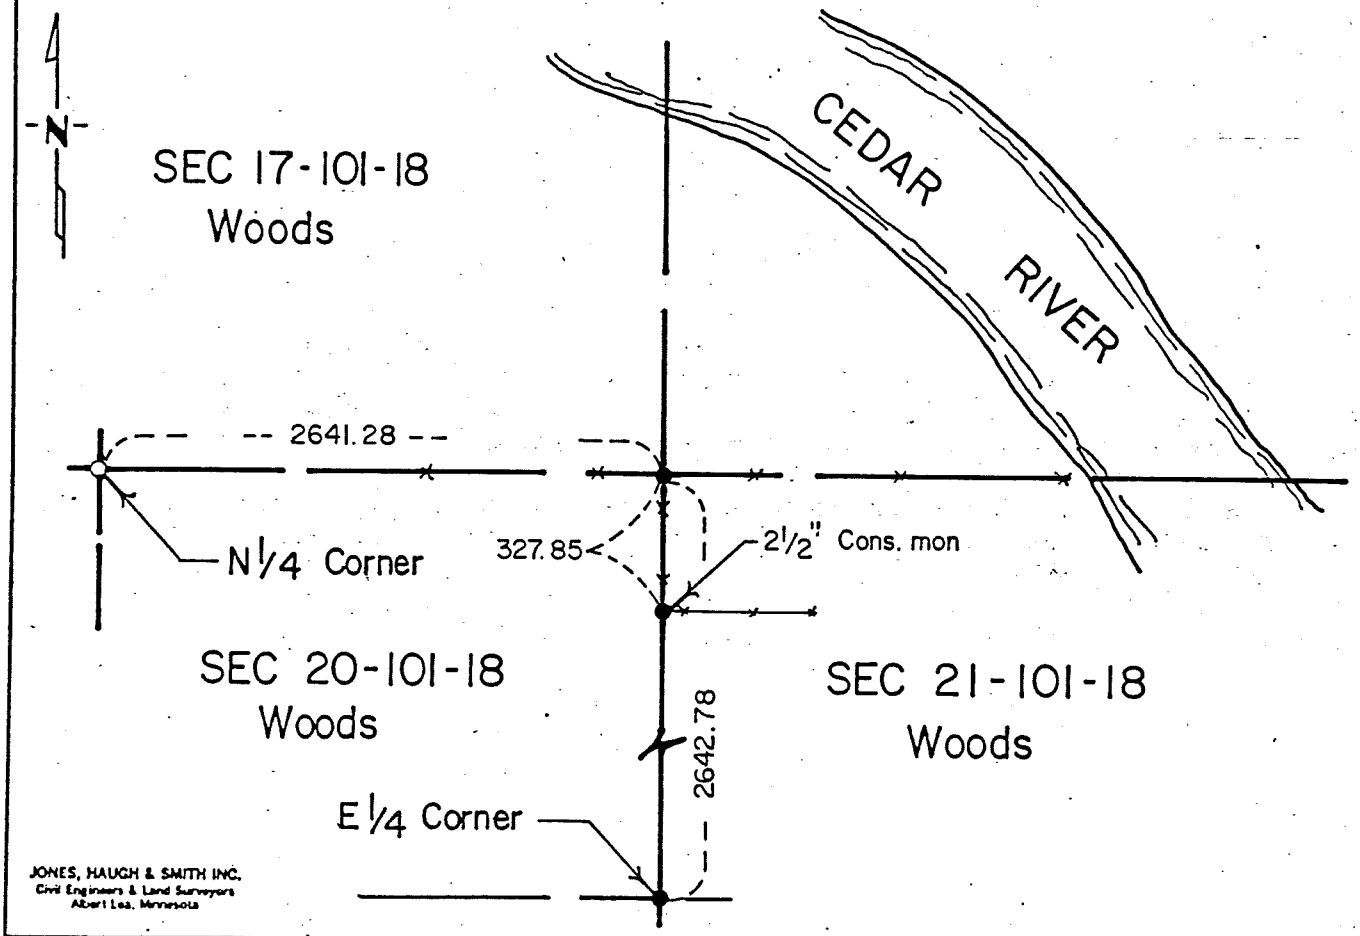

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-22-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NE corner Sec 20-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Survey Office in 1854. The government notes show this corner was marked with a post and the following ties were taken:

9" Elm	S 20°W	35 links (23.1 ft)
10" Elm	N 75 1/2°	47 links (31.02 ft)
12" Elm	N 71°E	19 links (12.54 ft)
12" Elm	S 8°E	60 links (39.60 ft)

The following were contacted for section corner information:
Mower County Engineering Department
Mower County Recorder's Office
Minnesota Dept of Natural Resources Engg Dept.

1884 Records of Clausen, County Surveyor from 1879-1892 shows a post in place and chaining notes are given.

1964 Minnesota Department of Natural Resources survey crew while surveying state property in Sections 16 & 17-101-18 made a thorough search of the area and found no evidence of public land survey corner or a perpetuation thereof at this location. The remains of a 3-way fence intersection was found but testimony of area residents said fence lines were just set meandering from tree-tree. Therefore the position of the corner was computed by double proportion and a cast iron monument was set. This position was found to be in agreement with the existing fence line intersection and was accepted as a perpetuation of the original public land survey corner. The following ties were taken:

Nail & bottle cap in 24" Elm	NW 35.62 ft
Nail & bottle cap in 15" Ash	NE 5.98 ft
Nail & bottle cap in 22" Elm	SSE 31.82 ft
Nail & bottle cap in 14" Ash	E 21.50 ft

1990 Jones, Haugh & Smith Inc crew found a 2 1/2" diameter cast head over a 3/4" diameter pipe set by Minnesota Conservation Department.

1992 Jones, Haugh & Smith Inc crew uncovered 2 1/2" diameter capped pipe set by Minnesota Conservation Department.

Corner found fits existing occupation lines, checks with DNR survey notes and records, and is accepted as best evidence of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a 3/4 ø x 28" pipe capped RLS 10162

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a Cast iron monument over pipe

SKETCH OF REFERENCE TIES

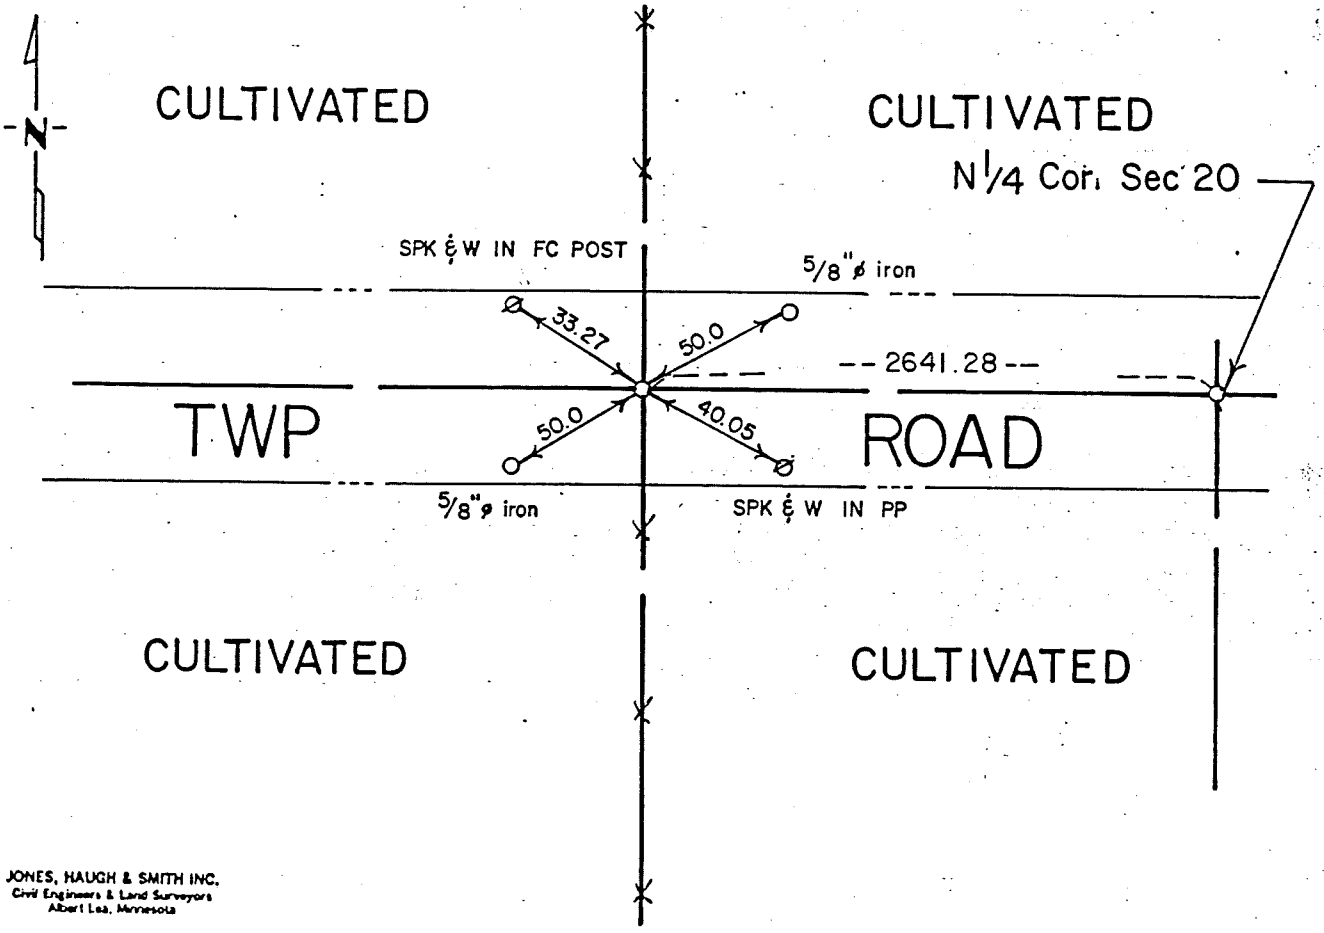

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 9-23-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 20-101-18

This corner was original established by Deputy Surveyor Wm. I. Anderson of the US General Land Office in 1854. The government notes show a wood post was set and a mound of earth was raised.

The following were contacted for section corner information:
Mower County Engineering Dept
Mower County Recorder's Office
Minnesota Department of Natural Resources
Minnesota Department of Transportation
Yaggy, Colby & Associates

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Yaggy, Colby & Associates found no evidence of public land survey corner. Therefore set a 3/4" x 24" long capped RLS 10162 pipe on centerline of east-west road in line with fence north and south.

1990 Jones, Haugh & Smith Inc personnel uncovered 3/4" capped pipe during survey in NE 1/4 of Section 20.

1992 Jones, Haugh & Smith Inc personnel under the direction of John Schulte IV, dug with the Mower County backhoe at the location of 3/4" capped pipe. A 5'x12'x4' deep hole and found no further evidence. Accepted 3/4" pipe as best evidence and set a cast iron monument over 3/4" pipe 0.5 feet below road surface.

The monument found fits occupation and road centerline and has been accepted by area surveyors as best evidence.

Index No. p. 55, "M"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 20, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 7-29-92 (DATE) found a 5/8"ø IRON x 3" LONG, CONTINUED DIGGING AND FOUND 6"x8"x10" POINTED STONE OVER 8"x15" POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-29-92 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

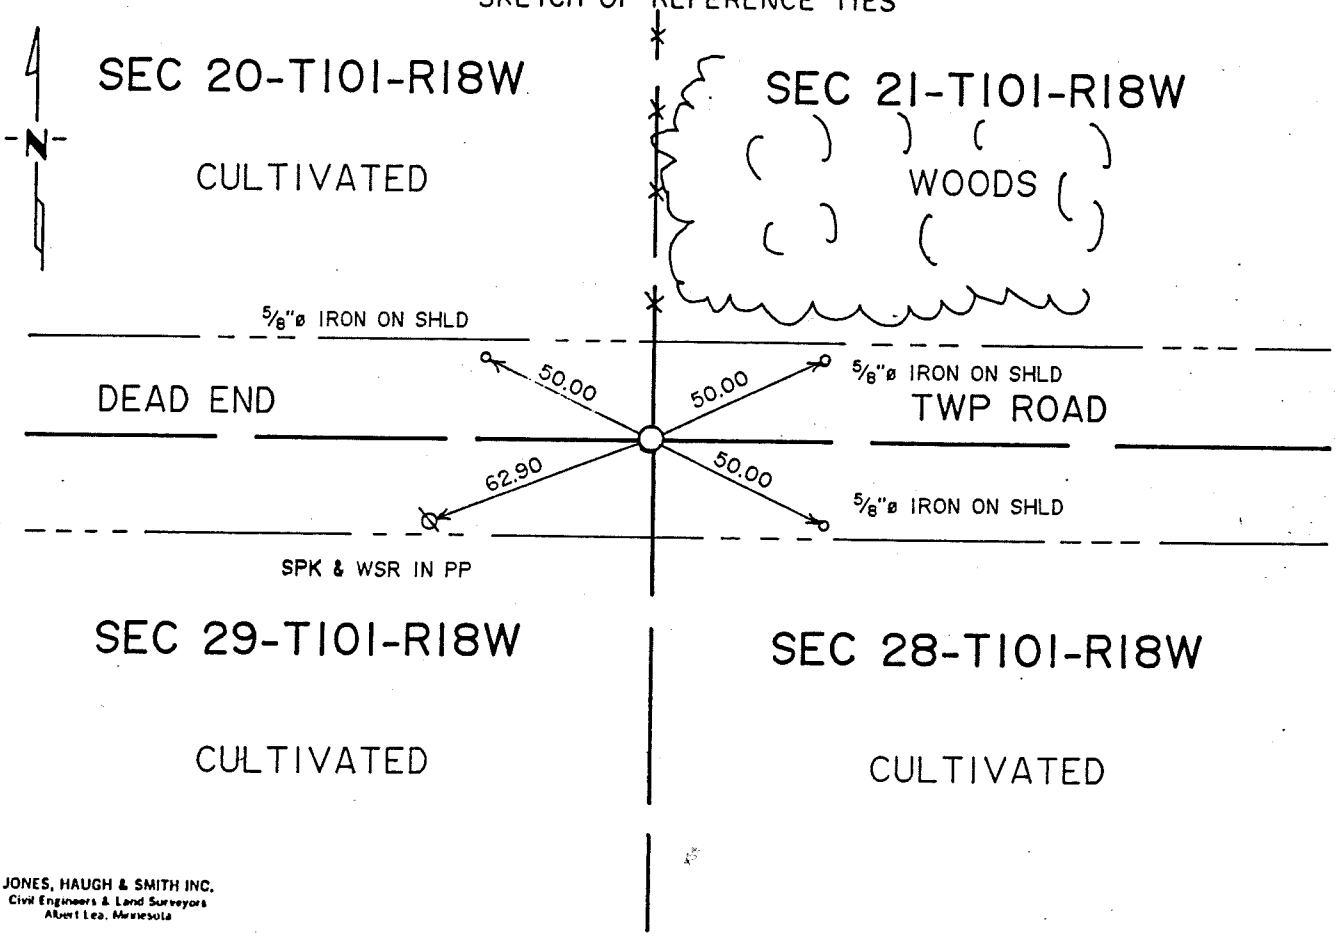

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 12-15-92 DATE

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SE corner Sec 20-101-18

This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following evidence was obtained to support a perpetuation of the original public land survey corner.

1891 Clausen notes indicate a stone monument inplace at the northwest corner of Section 28-101-18.

1992 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, dug with County backhoe and uncovered a 5/8" diameter iron x 3" long iron lying flat 2" deep. Continued digging and found a 6"x8"x10" pointed stone over a 8"x13" pointed field stone two feet deep in virgin soil. Set cast iron monument on east side of stones, 6" below road surface.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 25, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a 1'X1' POINTED ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

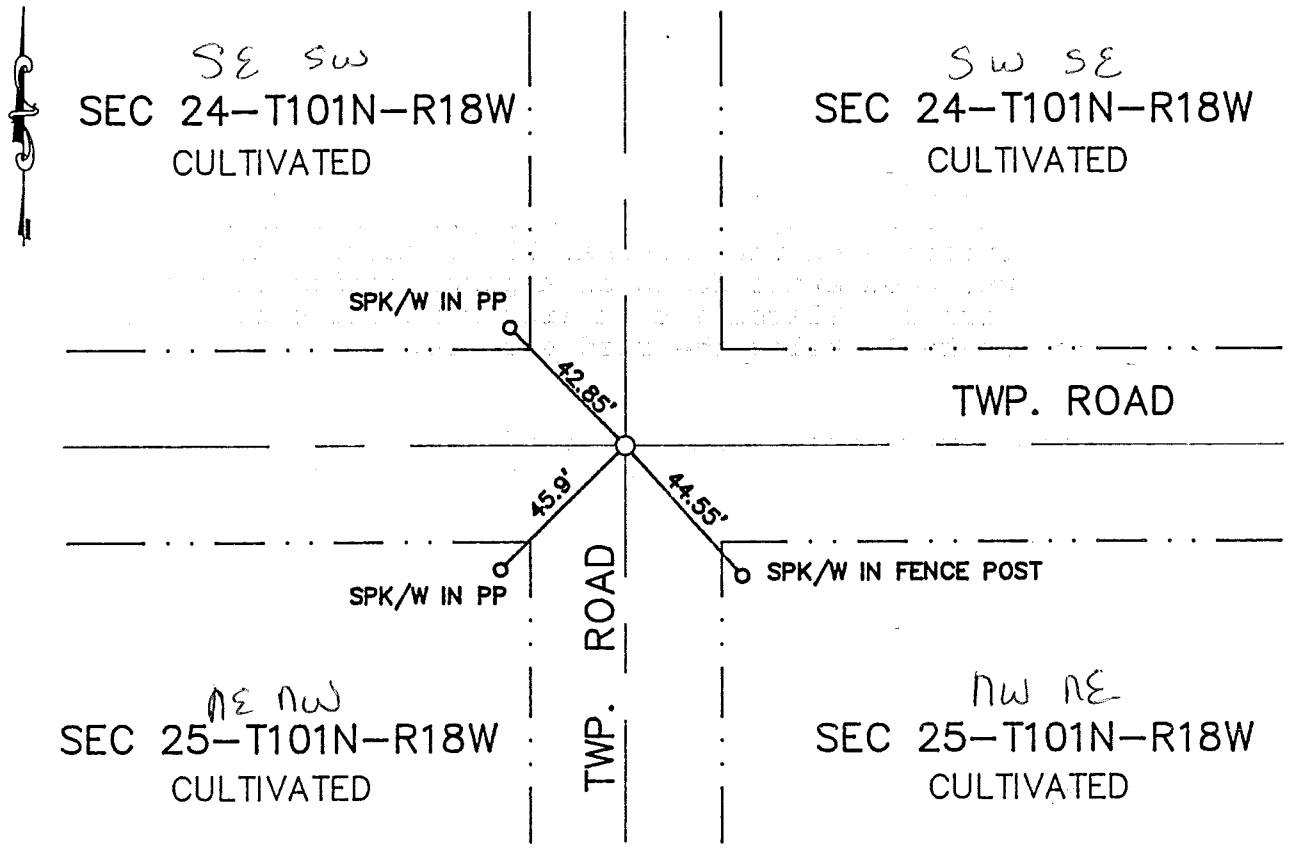

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 38

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446681

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a.M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Engen

By _____, Deputy

DOCUMENT NO. 446681

M.H.D. FORM NO. 2105

Book 92 Page 38 Misc

N 1/4 Cor SEC 25-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township roads N-S and E-W. Uncovered a 1'x1' pointed stone 3' deep. Found no other evidence of the original PLS corner. Accepted stone as true corner. Placed a 5/8"x16" iron capped #13807 on the north side of the stone. Placed a cast iron monument over stone found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 25, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

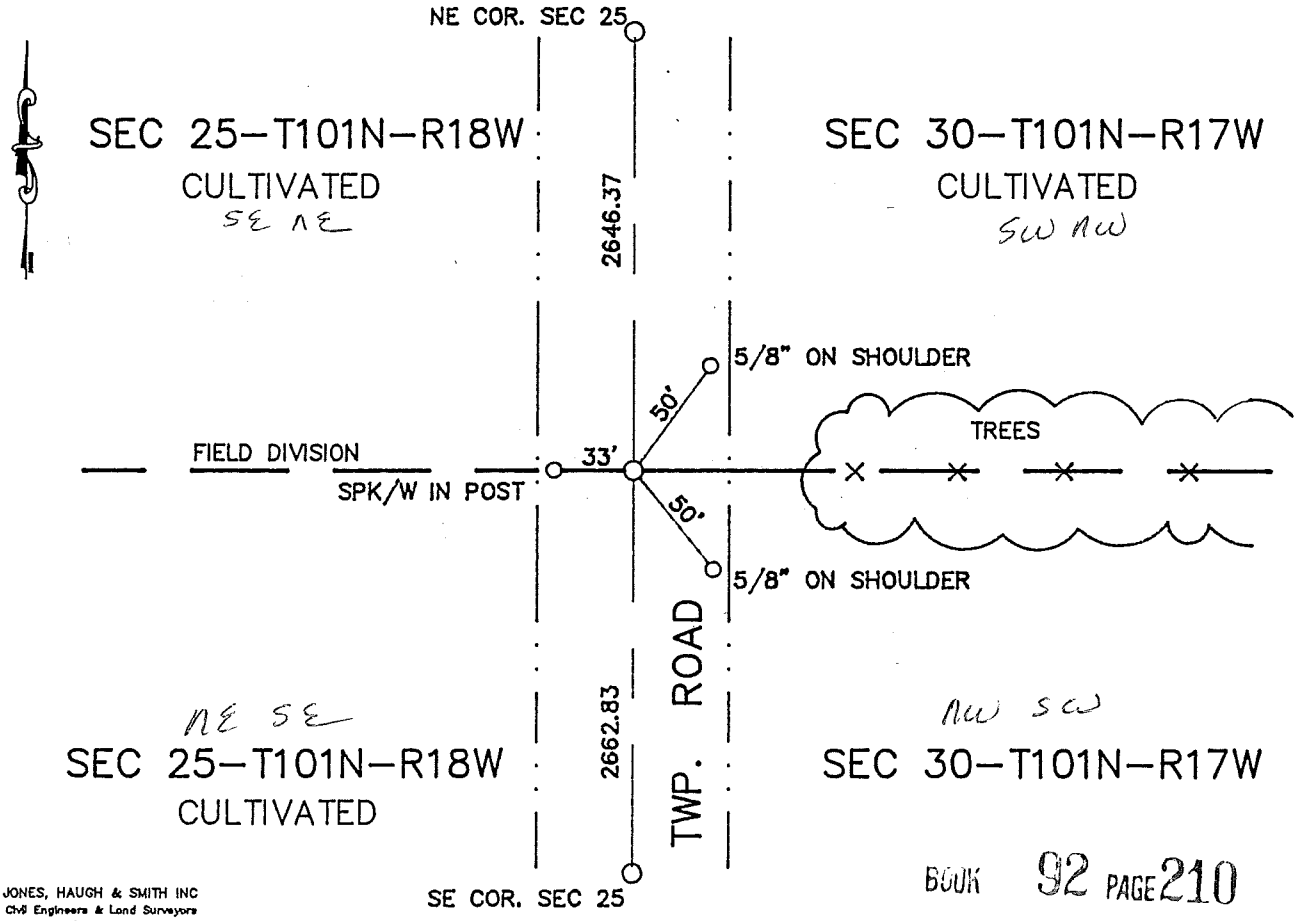

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 210

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-16-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 447264

M.H.D. FORM NO. 2105

Book 92 Misc Page 210

E 1/4 Cor SEC 25-101-18

This corner was originally established by Deputy William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe on centerline of north-south township road and in line with line fence east- field division west. Found no evidence of corner. Set corner on straight line between SE corner and NE corner. Corner fits centerline of twp road and inline with line fence east field division west. Set 5/8" x 16" iron with cast iron monument, .40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 25, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a ROTTED WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

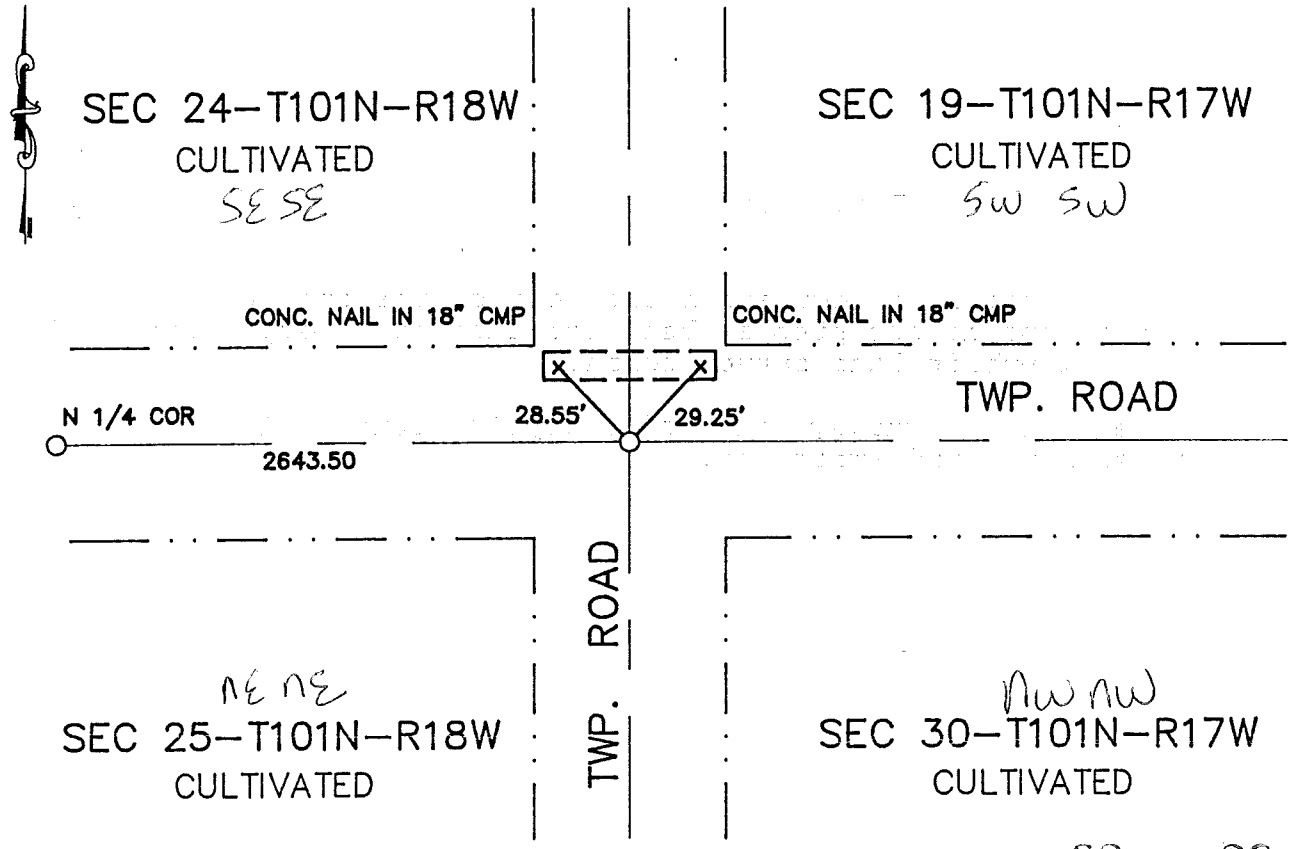

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 36

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-25-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

446680

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 A.M. on the 29th day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Sharyle Dayton, Deputy

DOCUMENT NO 446680

M.H.D. FORM NO. 2105

Book 92 Page 36 Misc

NE Cor SEC 25-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township road E-W and N-S and uncovered a 6" spike 1.5' deep in old road bed. Dug by hand below spike and uncovered a rotted wood stake 1' long. Continued digging and found no other evidence of the original PLS corner. Accepted spike and wood stake found as a perpetuation of original PLS corner. Placed a cast iron monument over spike and stake 4" below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 27, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a HARRISON CAST IRON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

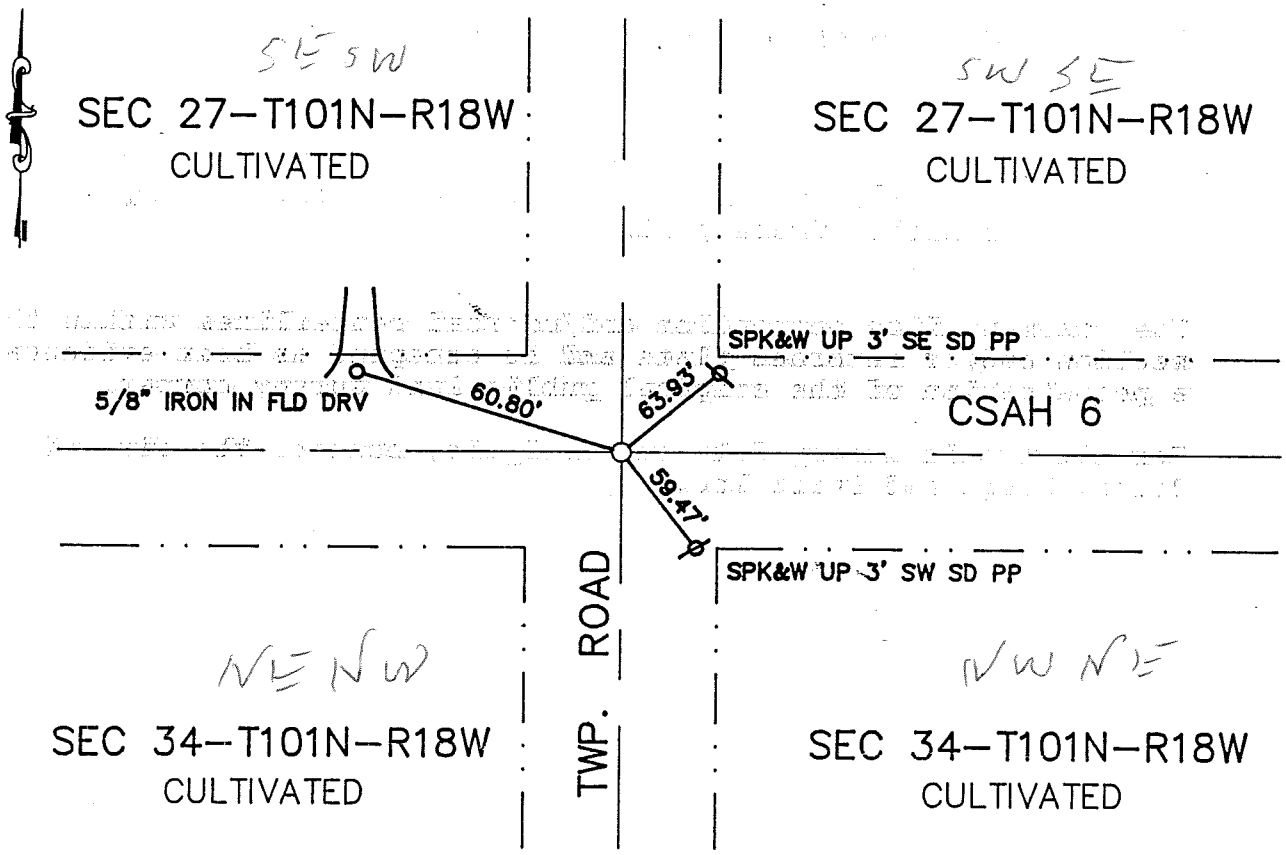

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-17-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 18 day of Mar A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 451745

M.H.D. FORM NO. 2105 BOOK 94 PAGE 372 Book 94 Misc Page 372

S 1/4 Cor SEC 27-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1974 Jones Haugh and Smith crew set a RR spike at this location.

Mower County Highway Department records show that they set a Harrison monument inplace of the RR spike.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located Harrison monument set by Mower County Highway Department at this location.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 27, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a POINTED STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

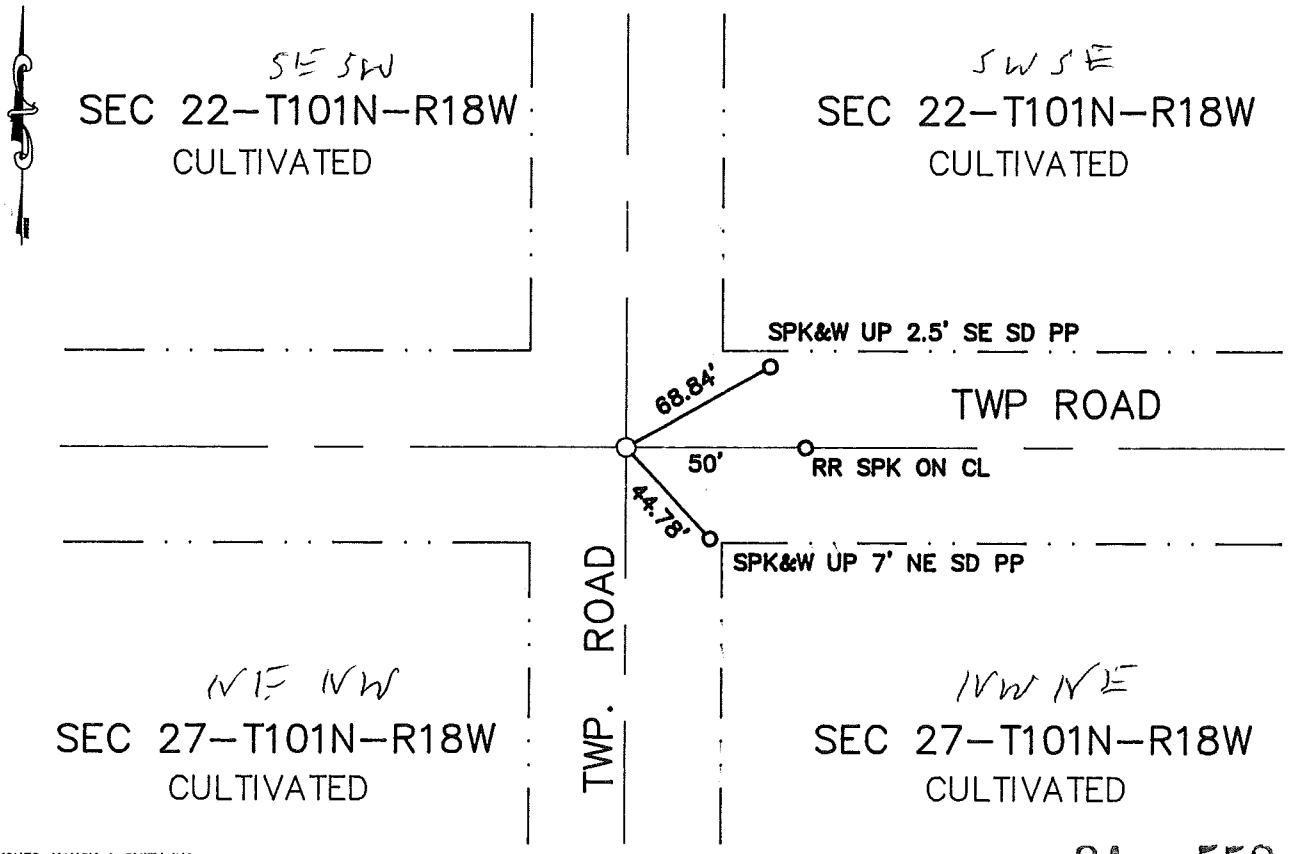

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 552

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452225

M.H.D. FORM NO. 2105

Book 94 Misc Page 552

N 1/4 Cor SEC 27-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1883 Clausen field notes show stone at corner.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL of township road N-S and township road E-W. Located pointed stone 3.5' below road surface. Accepted stone as perpetuation of original PLS corner. Placed a cast iron monument over stone found.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 27, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/20/1996 (DATE) found a 1/2" ROD AND CAP #15471 OVER STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/20/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

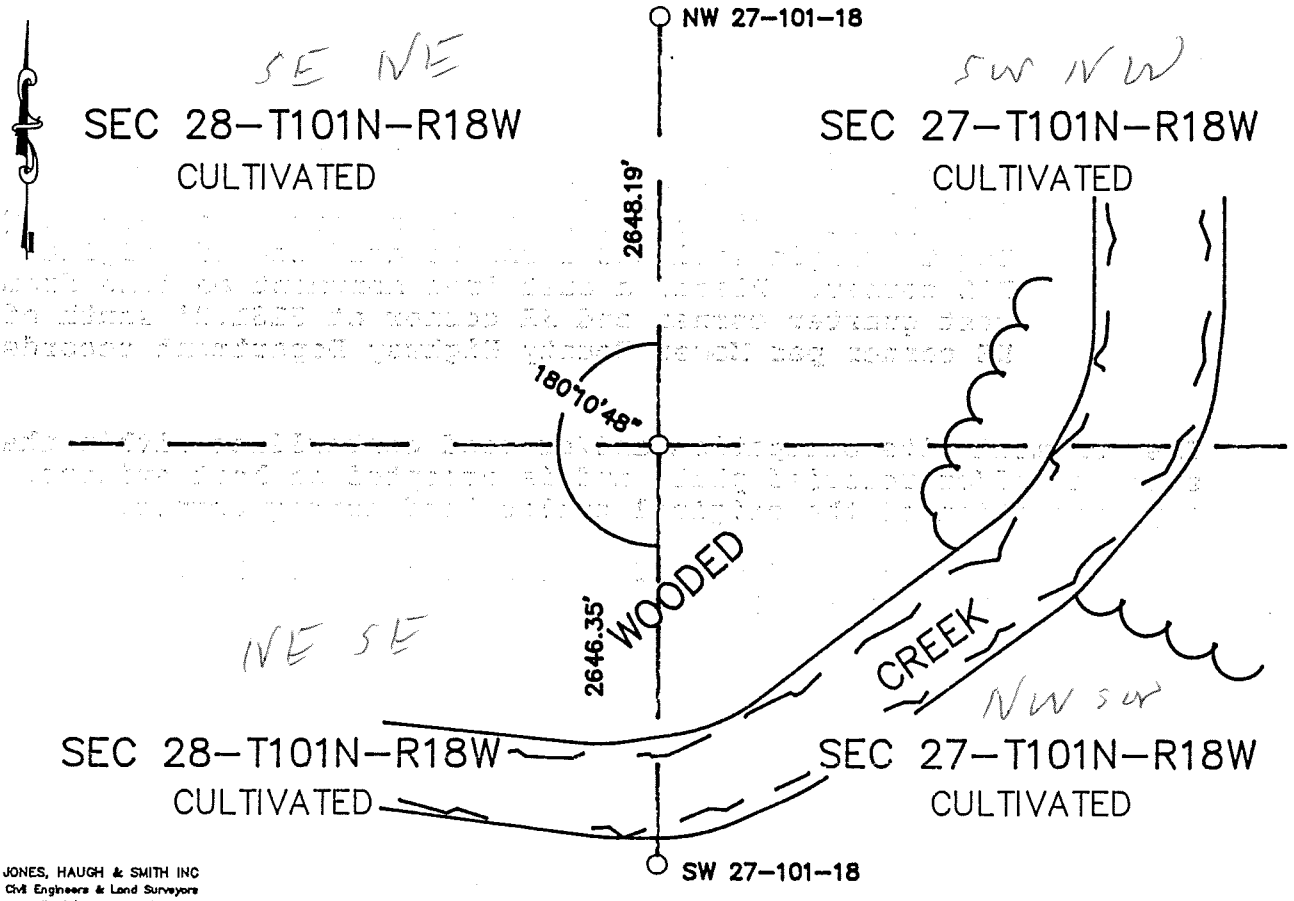

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 3-17-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 18 day of Mar A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 451744

M.H.D. FORM NO. 2105 BOOK 94 PAGE 370

Book 94 Misc Page 370

W 1/4 Cor SEC 27-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1883 Clausen field notes show a stone at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a 1/2" rod and cap #15471 over stone and on west side of a broken fence post.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 27, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a IRON PIN ON FENCE LINE WEST OF CORNER

SKETCH OF REFERENCE TIES

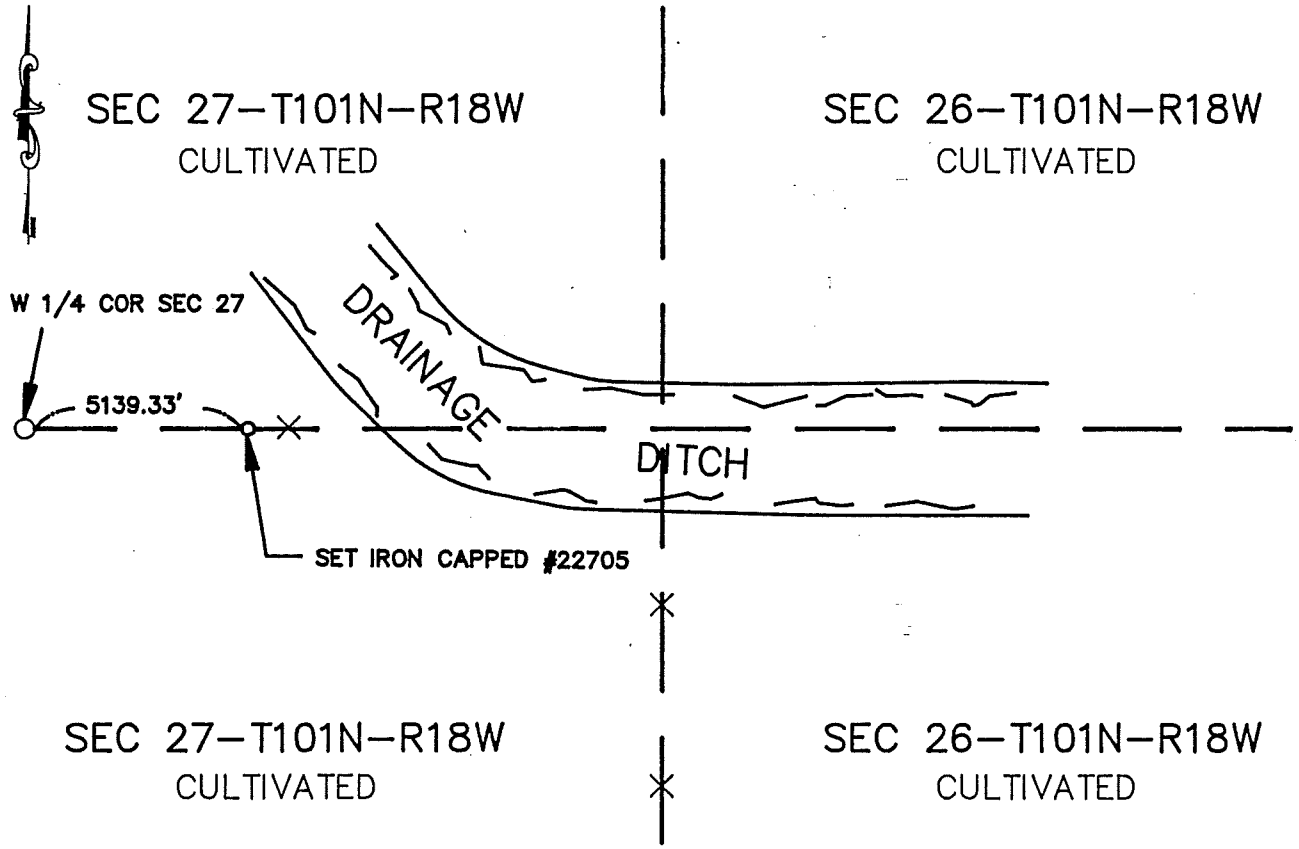

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-20-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 10 o'clock A.M. on the 23 day of June A.D., 1997

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. 454023

M.H.D. FORM NO. 2105

BOOK 95 PAGE 369

E 1/4 Cor SEC 27-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1883 Clausen field notes show a Government post at corner.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located corner and found that it was destroyed by ditch construction. Used fence line west for N-S position and fence line south for E-W position. Set a 5/8" iron on fence line west.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 28, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/14/1995 (DATE) found a 5/8 IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/14/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

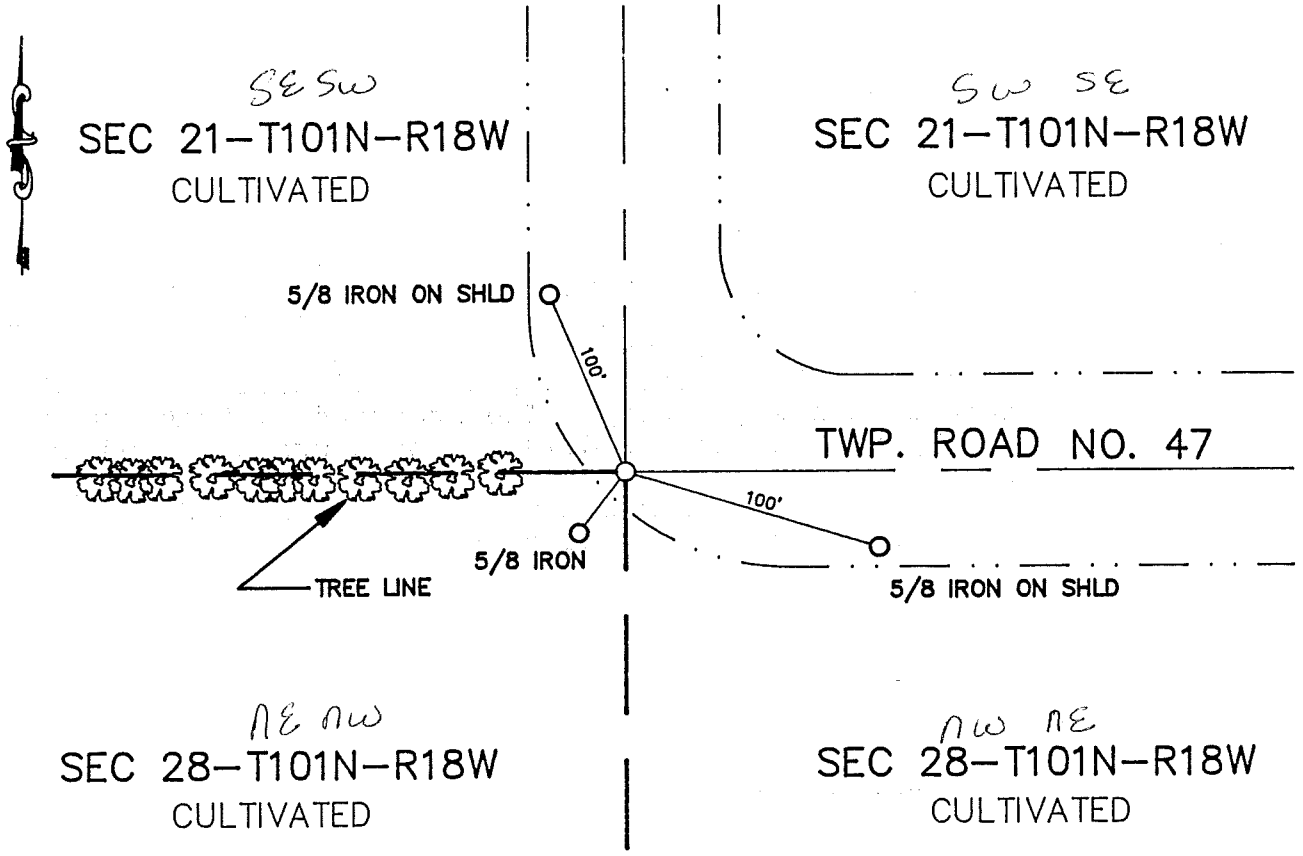

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger
By Susan M. Davis, Deputy
DOCUMENT NO. 140738

M.H.D. FORM NO. 2105 Book 89 PAGE 210

Book 89 Misc Page 210

N 1/4 Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL of township road E-W and N-S. Found a 5/8" iron pin at road surface. Continued digging and found no other evidence of true corner. Excepted iron found as perpetuation true corner. Set cast iron monument at the surface of the road.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 211

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 28, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/14/95 (DATE) found a R/R SPK. 6" BELOW ROAD SURFACE OVER A 1 1/2x 1' FLD STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/14/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

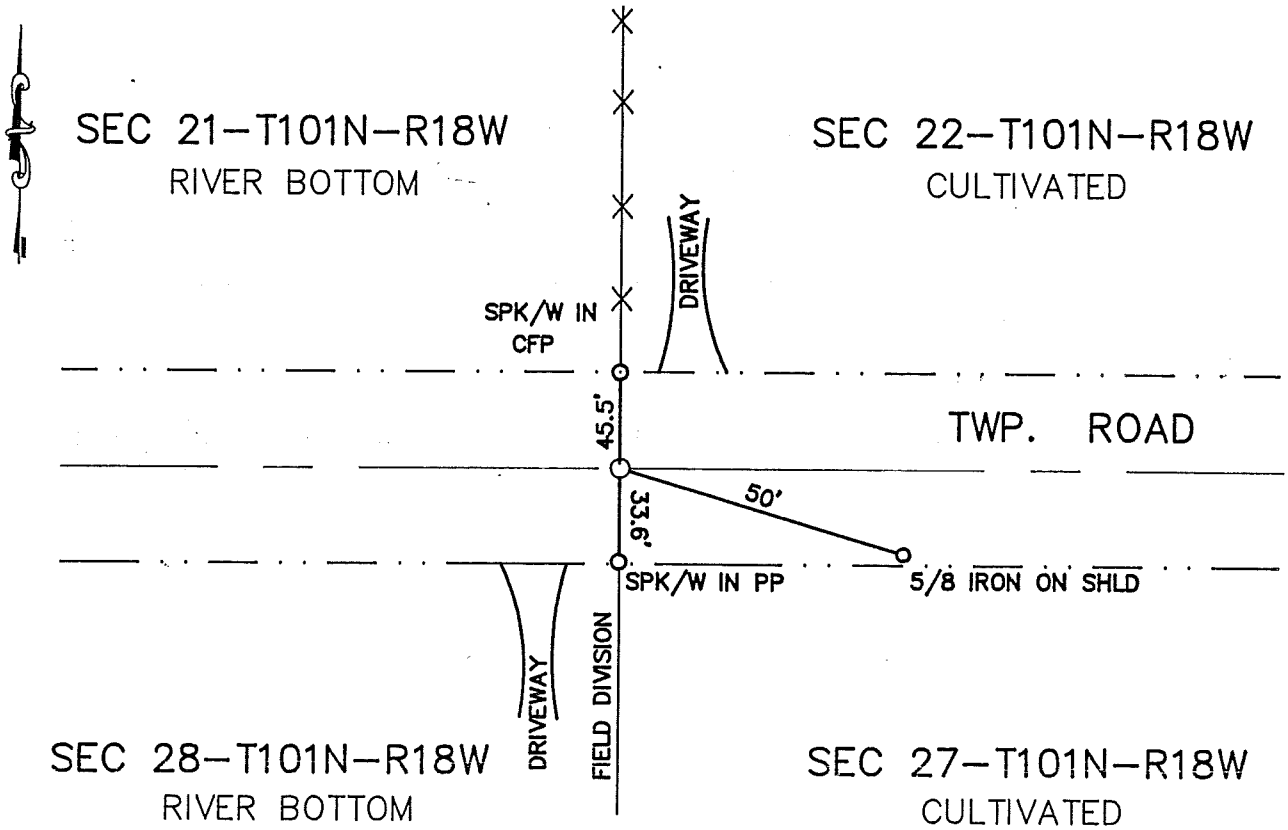

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-26-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M Davis, Deputy

DOCUMENT NO. 442203

M.H.D. FORM NO. 2105 BOOK 90 PAGE 111 Book 90 Misc Page 111

NE Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL of road in line with line fence North and South and field division South. At 6", a railroad spike was found. Continued digging and found a 1 1/2x1' stone 1' below old road bed 2.3' below the existing road surface. No further evidence was found. The stone was accepted as a perpetuation of the true corner and a cast iron monument was set over the stone, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 28, Township 101N Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/16/95 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/16/95 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

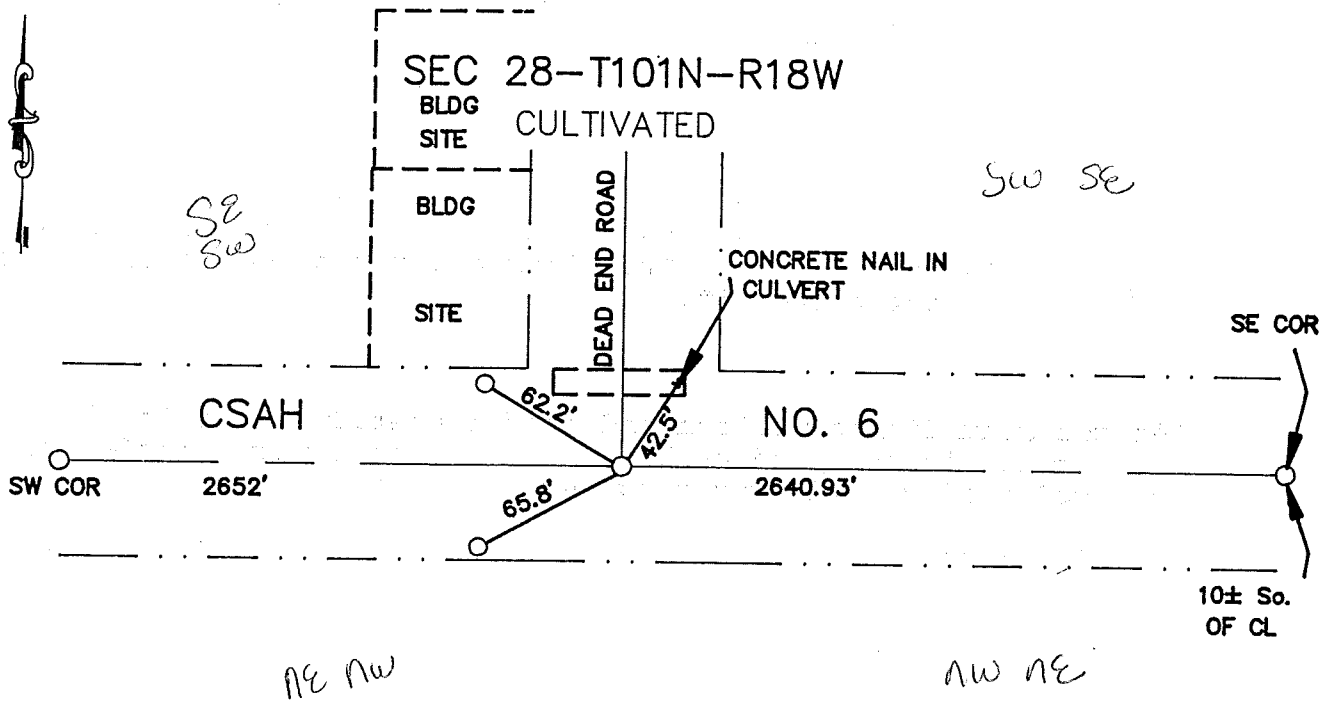

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 13 day of Nov A.D., 1995

COUNTY RECORDER Charles W Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 140240

M.H.D. FORM NO. 2105 Book 89 PAGE 214

Book 89 Misc Page 214

S 1/4 Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Mower Co. Hwy Dept. records indicated that before CSAH #6 was rebuilt there was a corner in this location on a straight line between the sec corners. Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 E-W and the CL of a dead end road N-S. Ray Tucker had dug with backhoe and set this corner, but neither the ties or the corner could be found. Therefore we placed a cast iron monument on a straight line between the SW section corner and the SE corner using distances obtained from Mower Co. Hwy Dept.

The monument set fit occupation and road centerlines within the section and past survey records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 215

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 28, Township 101 Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/14/1995 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

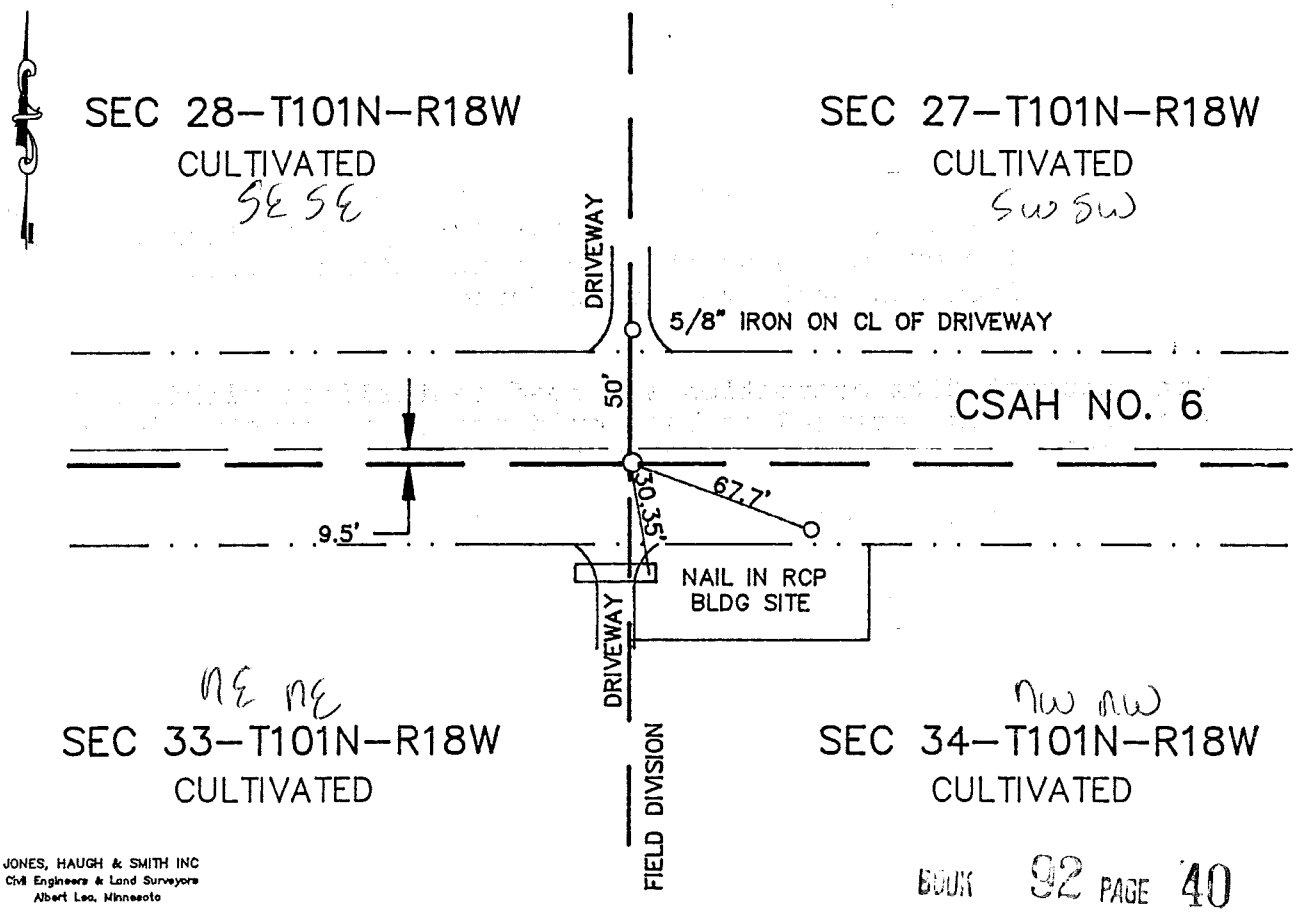

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 40

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE 7-25-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER 446682

County of Mower

I hereby certify that this document was filed in the County Rec. office at 9 a .M. on the 29 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Winifred Taylor, Deputy

DOCUMENT NO 446682

M.H.D. FORM NO. 2105

Book 92 Page 40 Misc

SE Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1995 Mower County R/W plans for CSAH 6 show corner at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a cast iron monument 9.5' south of CL on CSAH No. 6 which was in agreement with Mower County R/W plans and past surveys. Accepted this monument as a perpetuation of the original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 28, Township 101N Range 18W, 5th P.M.


STATE OF MINNESOTA, County of MOWER

At the corner location shown on the sketch

☐ On 01/29/1974 (DATE) found a 3/4" IRON

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/14/1995 (DATE) placed a CAST IRON MONUMENT OVER 3/4" IRON

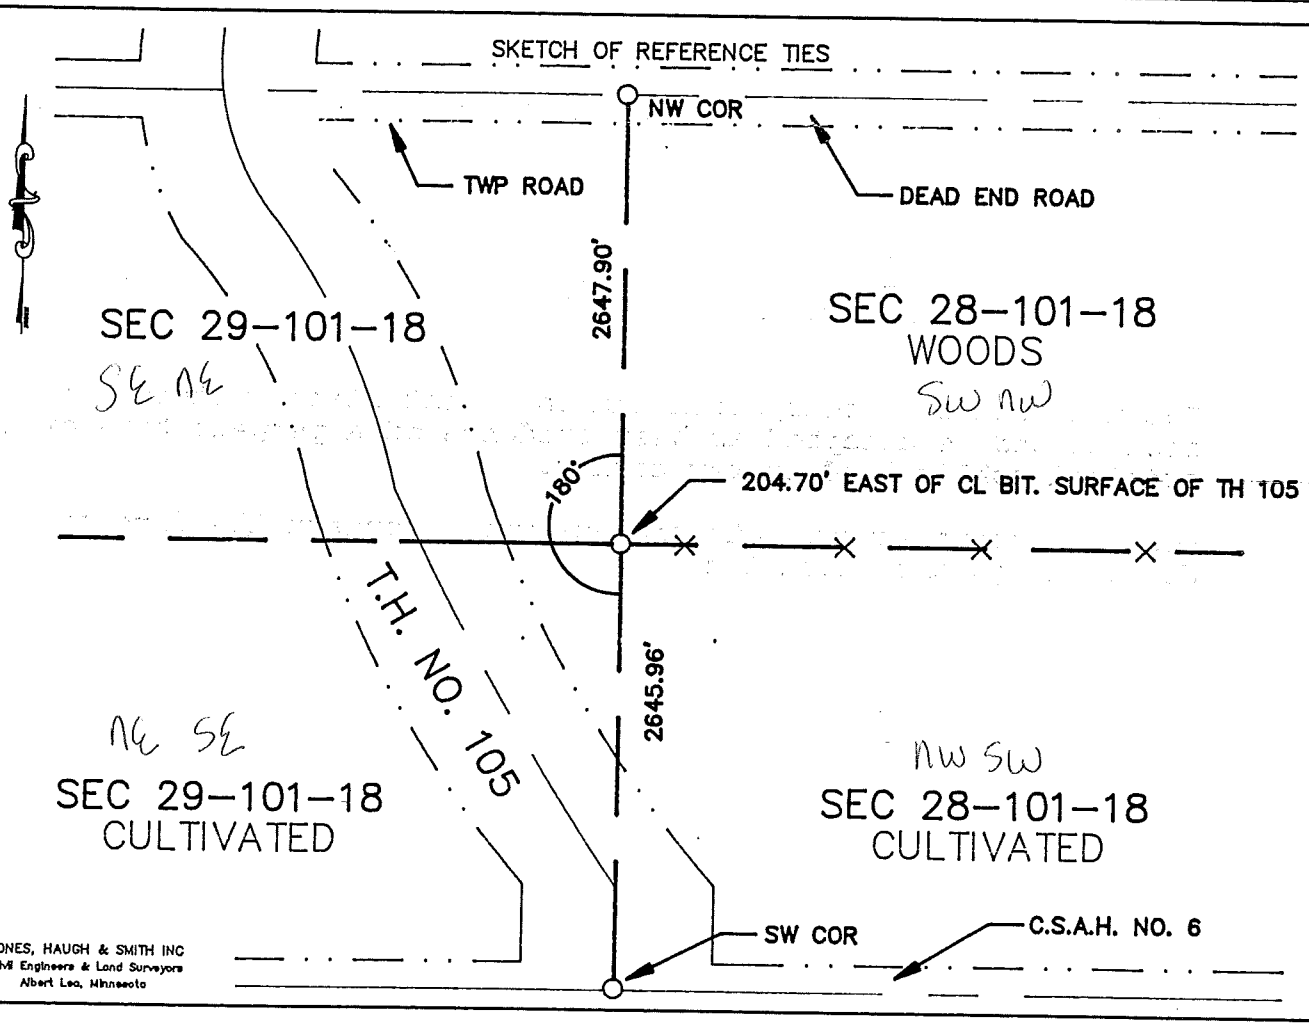

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ SIGNATURE

7-19-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 p .M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 446546

M.H.D. FORM NO. 2105 BOOK 91 PAGE 554

Book 91 Misc Page 554

W 1/4 Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1974 Jones Haugh and Smith found a 3/4" iron at this location.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and found a 3/4" iron in fence line which agreed with the monument found in 1974. Placed a cast iron monument above iron found at ground level.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/14/95 (DATE) found a HARRISON MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/14/95 (DATE) placed a –

SKETCH OF REFERENCE TIES

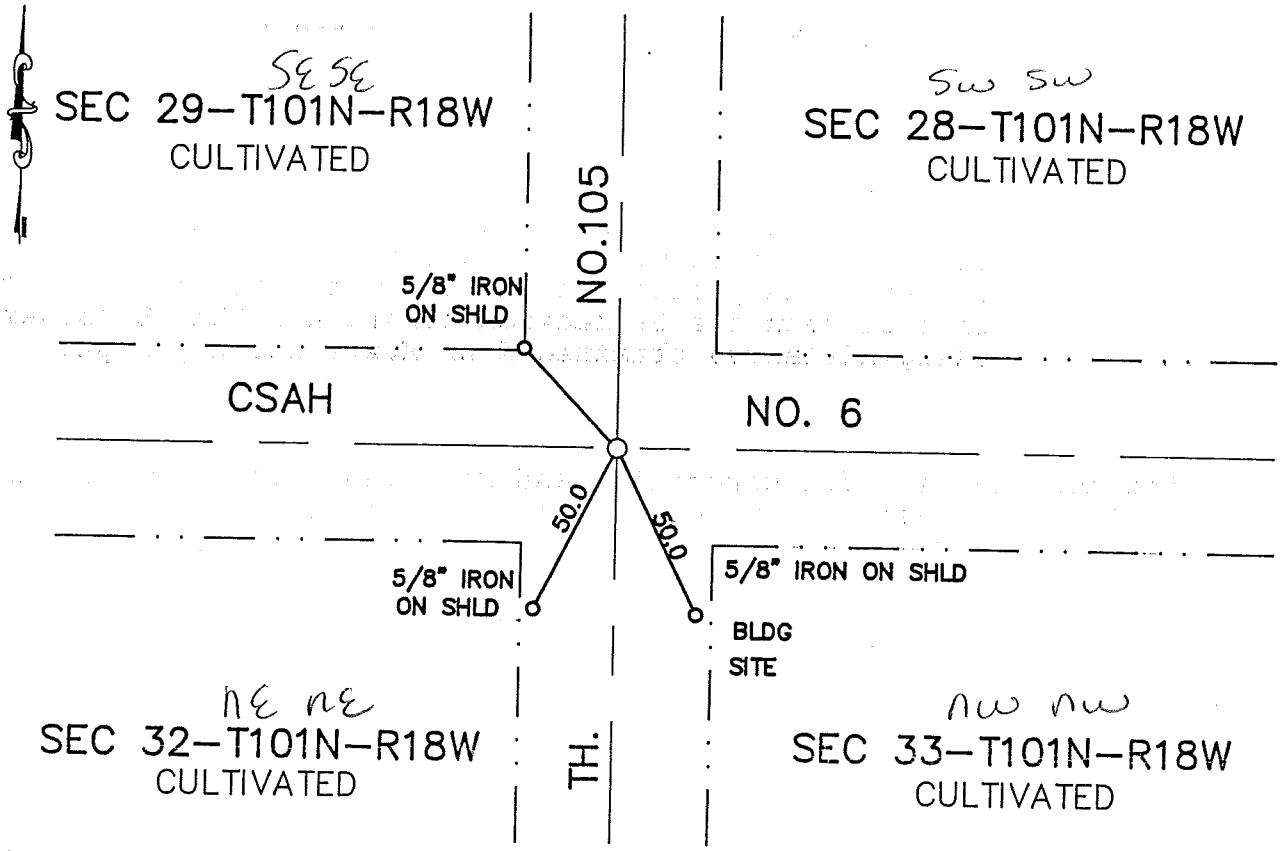

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-7-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 13 day of Nov A.D., 19 95

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 140741

M.H.D. FORM NO. 2105 Book 89 PAGE 216 Book 89 Misc Page 216

SW Cor SEC 28-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1956 Mower Co. Hwy Dept. records indicate an Inp. concrete monument at this corner with the following ties:
150.6' to S.E. cor of house.
67.2' S.E. to E. 20" Pine.

1976 JHS crew found 1/2" iron in concrete monument.

1987 JHS crew found cast iron monument which agreed with the location of 1/2" iron in concrete monument found in 1976.

1995 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at CL CL of CSAH NO. 6 and TH. NO. 105. Found Harrison monument which agrees with the 1987 record.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 89 PAGE 217

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 29, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/04/1991 (DATE) found a CONC. MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/04/1991 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

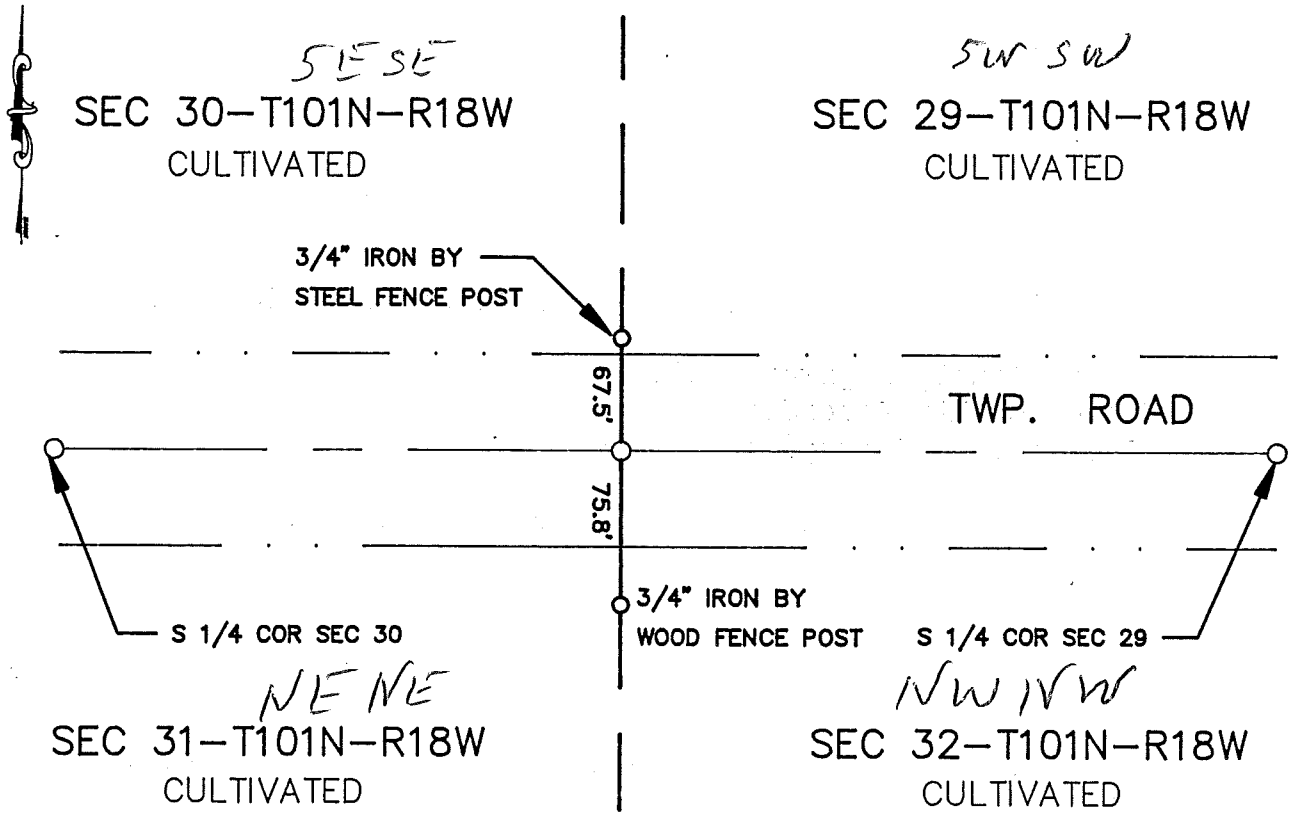

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 287

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 455998

M.H.D. FORM NO. 2105

Book 96 Misc Page 287

SW Cor SEC 29-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower Hwy Dept records indicate a concrete monument at this location.

1976 Jones Haugh and Smith crew found a 1/2" iron in concrete using magnetic locator, which agreed with ties by Mower County.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 and located a concrete monument.

1997 Jones Haugh and Smith crew dug by hand and located concrete monument and set a 5/8" iron over monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 29, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/04/1991 (DATE) found a 1/2" IRON IN CONC. MON.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/04/1991 (DATE) placed a 5/8" IRON

SKETCH OF REFERENCE TIES

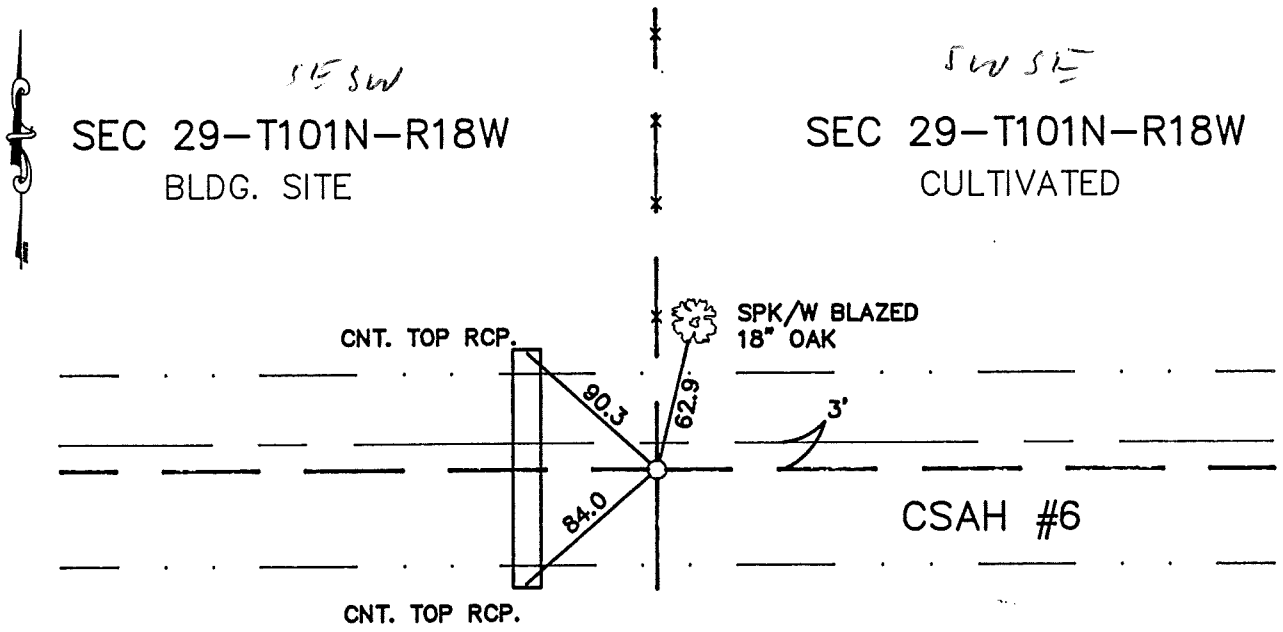

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 261

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Lawin, Deputy

DOCUMENT NO. 45548

M.H.D. FORM NO. 2105

Book 96 Misc Page 261

S 1/4 Cor SEC 29-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1976 Mower County Highway Dept. notes show concrete monument at this location.

1976 Jones Haugh and Smith crew located a 1/2" iron in concrete 1.5' deep. Placed a 5/8" iron over monument found.

1991 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of CSAH No. 6 and in line with line fence north and located a aluminum monument in agreement with 1976 ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 29, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a LARGE POINTED STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

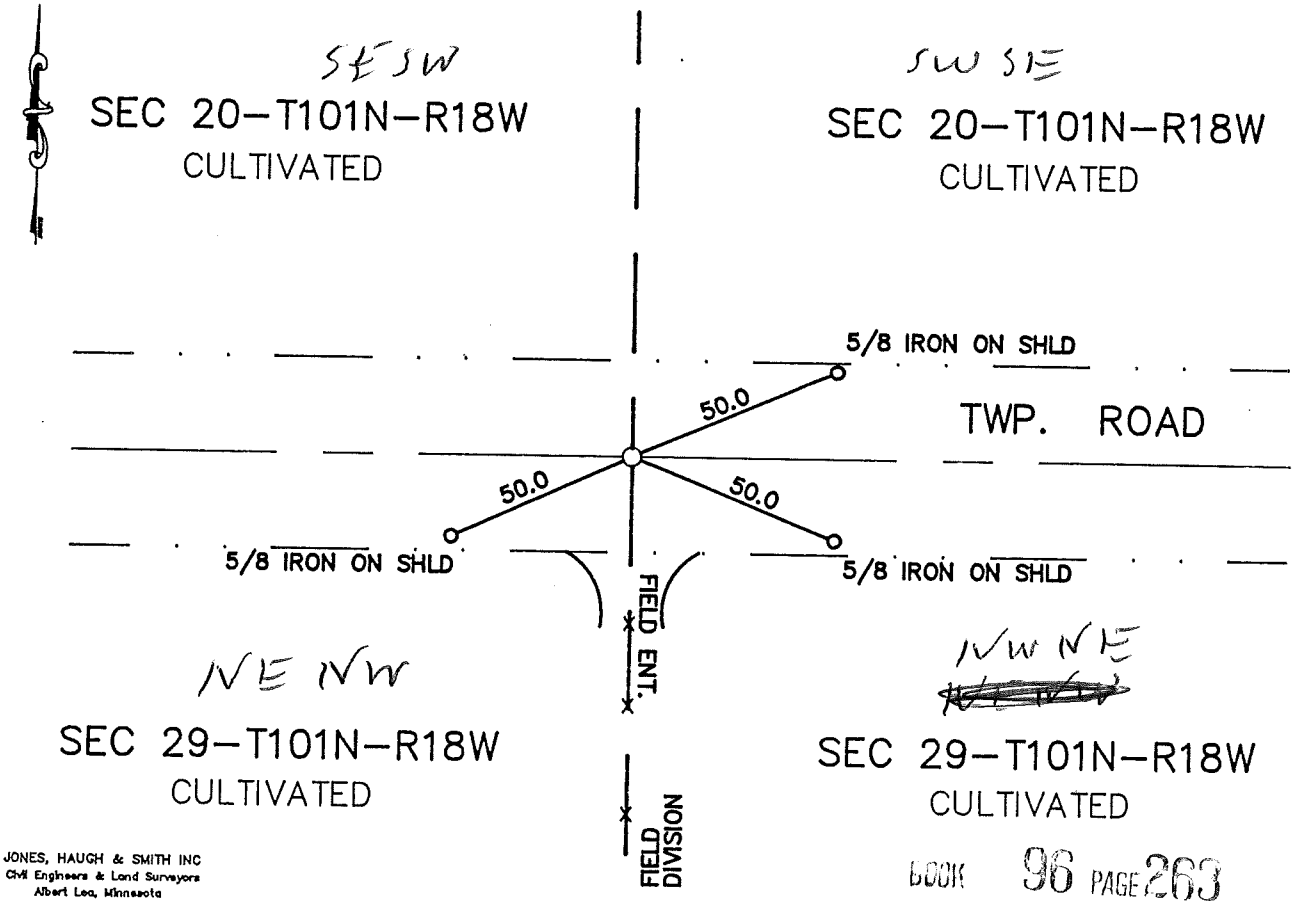

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 263

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-12-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 19 97

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455949

M.H.D. FORM NO. 2105

Book 96 Misc Page 263

N 1/4 Cor SEC 29-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at intersection CL twp road and in line with fenceline south. Found a large pointed stone in virgin soil. Accepted stone as a perpetuation of the original PLS corner and set a 5/8" iron on the west side. Also set a 5/8" iron with a cast iron monument over stone at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/05/1985 (DATE) found a WOOD POST AND STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/05/1985 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

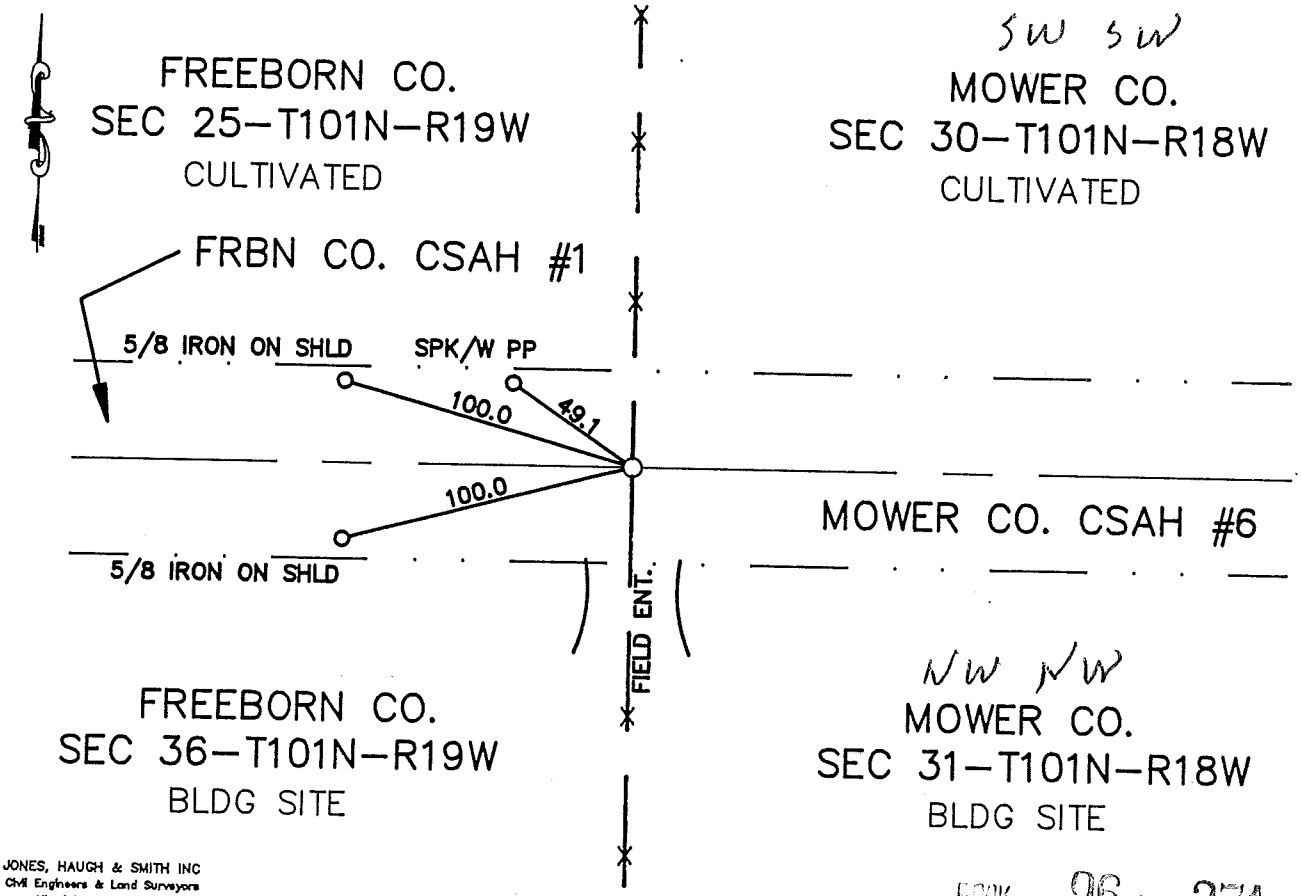

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 271

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455953

M.H.D. FORM NO. 2105

Book 96 Misc Page 271

SW Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor J.B. Reyman of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1940 John Nielson's Freeborn County Survey notes indicate he found a corner at this location and placed a pipe over that found monument.

1985 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at location of 5/8" iron found on road surface. Found a pipe in a clay tile set over a 3/4" pipe driven into a wood post. Accepted 3/4" pipe in wood post as the PLS corner and set a cast iron monument over, at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a LARGE STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

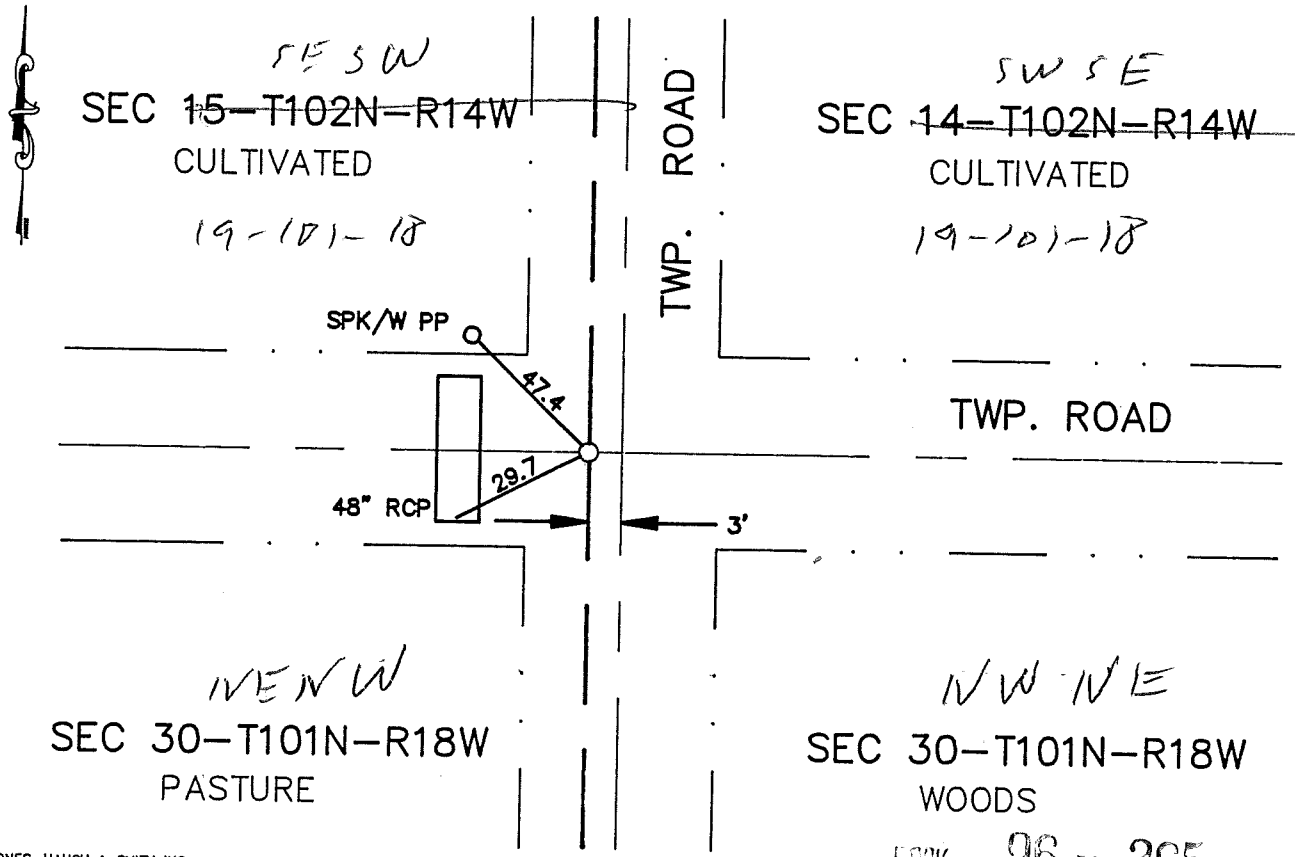

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 265

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455950

M.H.D. FORM NO. 2105

Book 96 Misc Page 265

N 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at intersection of township roads N-S and E-W. Uncovered a 5/8" iron 1' deep. Continued digging and uncovered a 5/8" iron 3.5' deep on the north side of a large pointed field stone on the CL of township road E-W and 3' west of CL township road N-S. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a LARGE STONE 3' DEEP IN VIRGIN SOIL

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

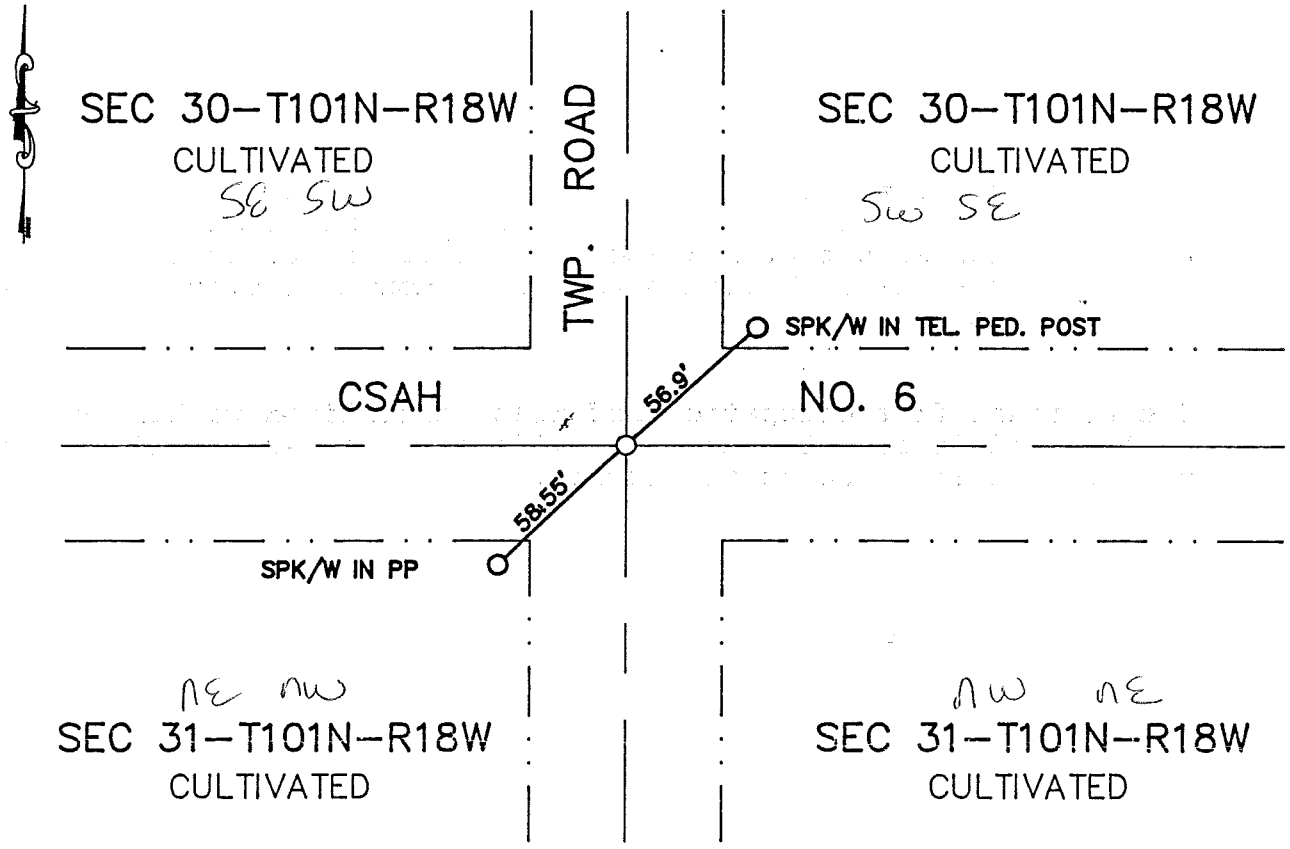

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 91 PAGE 558

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-19-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 446548

M.H.D. FORM NO. 2105

Book 91 Misc Page 558

S 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor Hardin Nowlin of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL twp. road and CSAH 6. Found a 3" diameter aluminum monument on a 3/4" iron .5' deep. Continued digging and found a conc. monument over a large stone in virgin soil. Accepted stone as original corner and placed a CIM at the surface.

The mornnument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/07/1993 (DATE) found a 1" PIPE OVER A WOODEN STAKE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

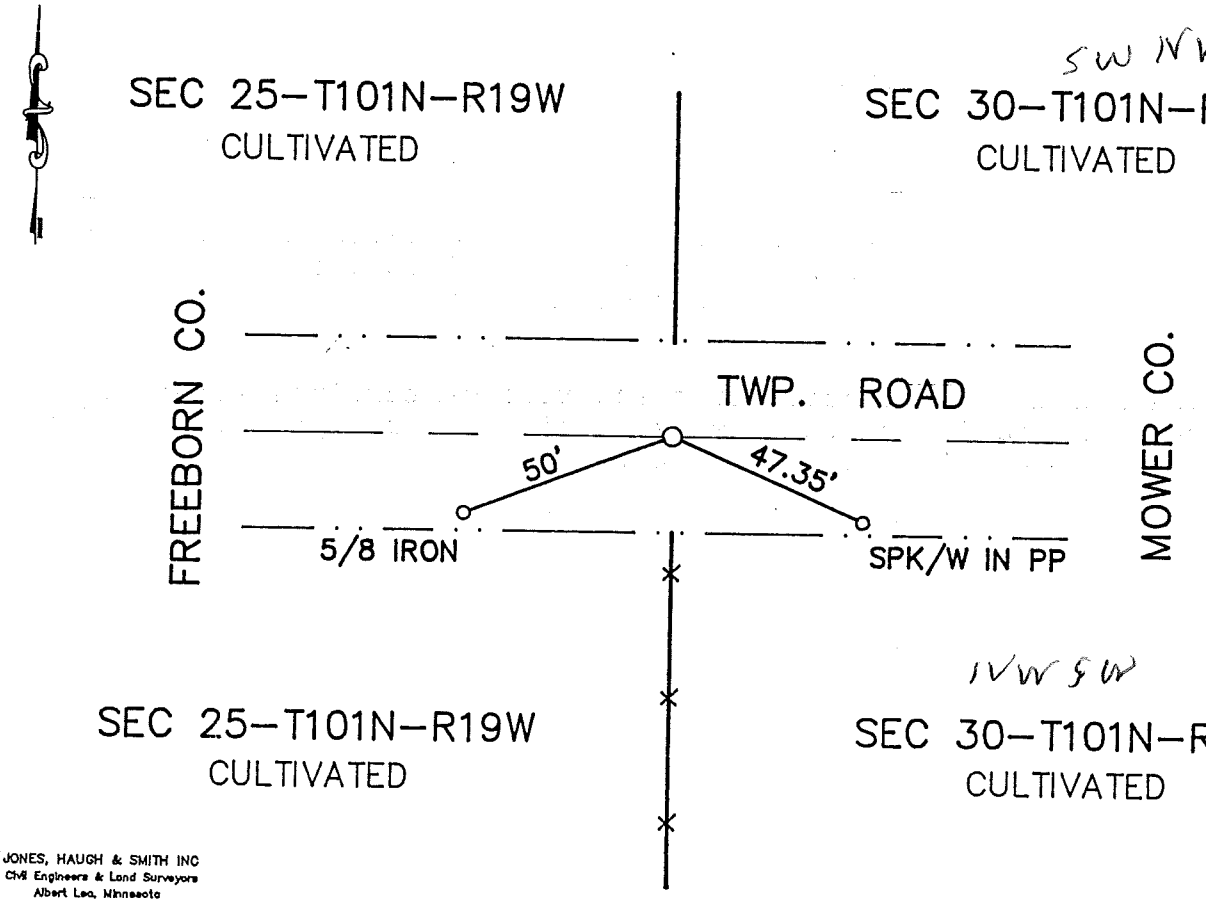

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-9-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower 446232

I hereby certify that this document was filed in the County Rec. office at 1 P.M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engel

By Cheryl L Taylor, Deputy

DOCUMENT NO. 446232

M.H.D. FORM NO. 2105

BOOK 91 Page 486 BOOK 91 PAGE 486

W 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor Hardin Nowlin of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of township E-W and in line with line fence south. Uncovered a 1" pipe over a 1"x2' wood stake. Continued digging and found the remains of an old wood post in virgin soil. Placed a cast iron monument over monuments found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 30, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On — DATE found a —

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/07/1993 DATE placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

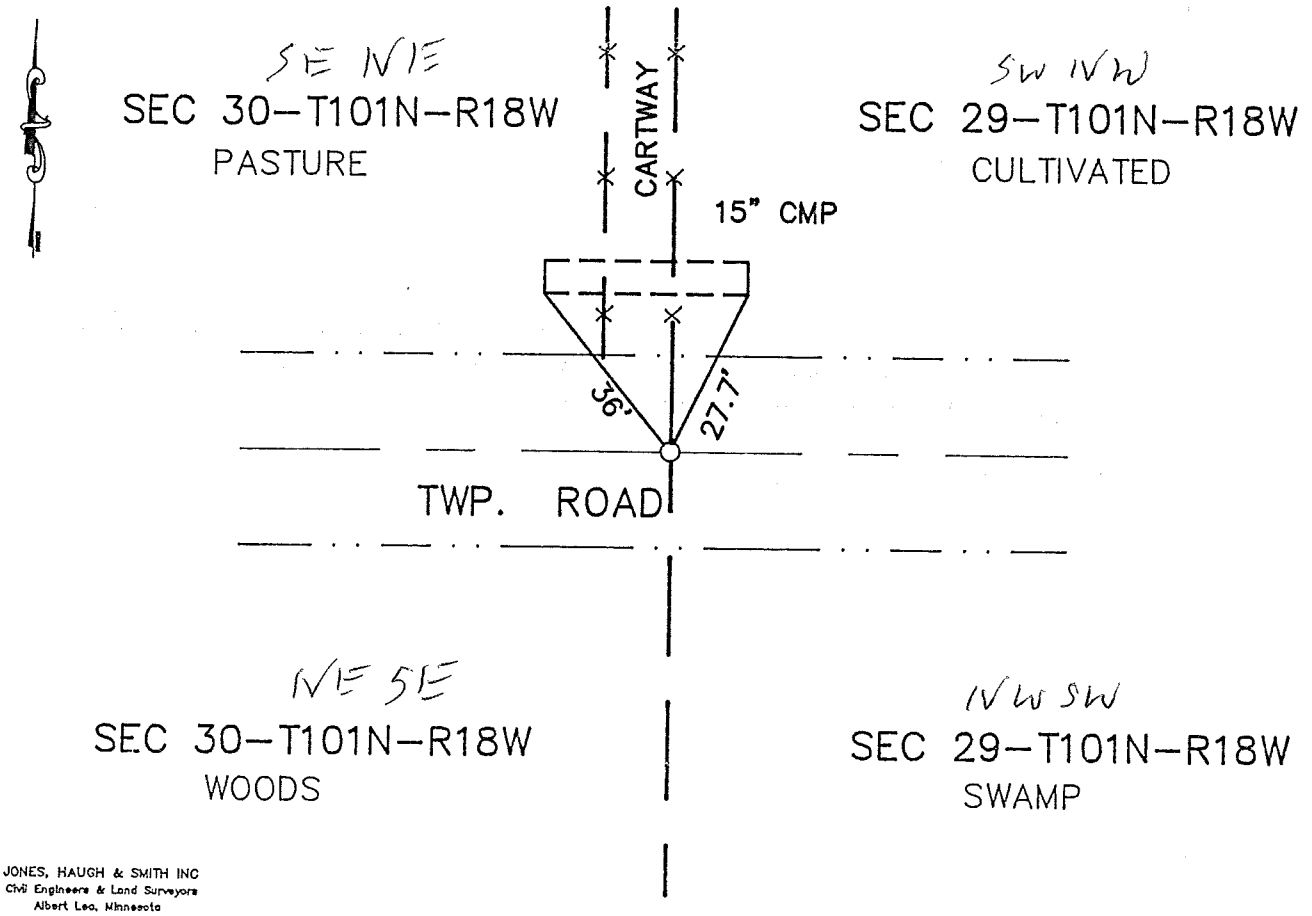

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE 7-9-96 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER 446231
County of _____

I hereby certify that this document was filed in the County Rec. office at 1 P.M. on the 10th day of July A.D., 1996

COUNTY RECORDER Charles Engen

By Sheryl A Scipka, Deputy

DOCUMENT NO. 446231

M.H.D. FORM NO. 2105

Book 91 Page 484 BOOK 91 PAGE 484

E 1/4 Cor SEC 30-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1993 Jones Haugh and Smith crew, under direction of John Schulte, Freeborn County Surveyor RLS 13807, dug with county backhoe at intersection CL twp. road and in line with fence line north. No evidence was found. Local resident stated that road had been obliterated by a flood a few years before, destroying any evidence of the corner. Accepted the road CL and fencline as best evidence of the corner and set a CIM at the surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/17/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/17/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

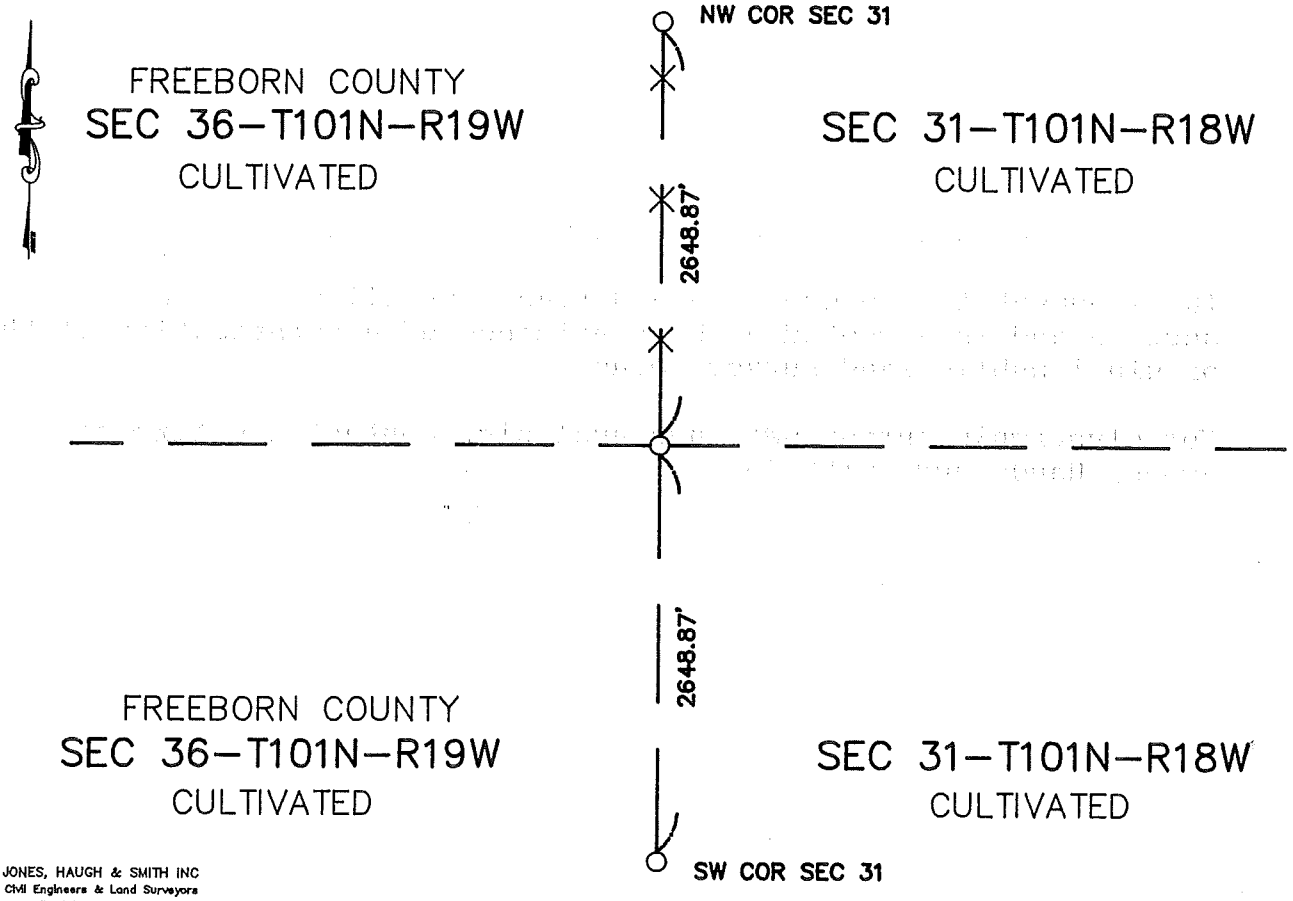

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-10-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the intersection of fences north and west. Found no evidence of original PLS corner. Placed a cast iron monument at fence intersection.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 10/17/1997 (DATE) found a REMAINS OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 10/17/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

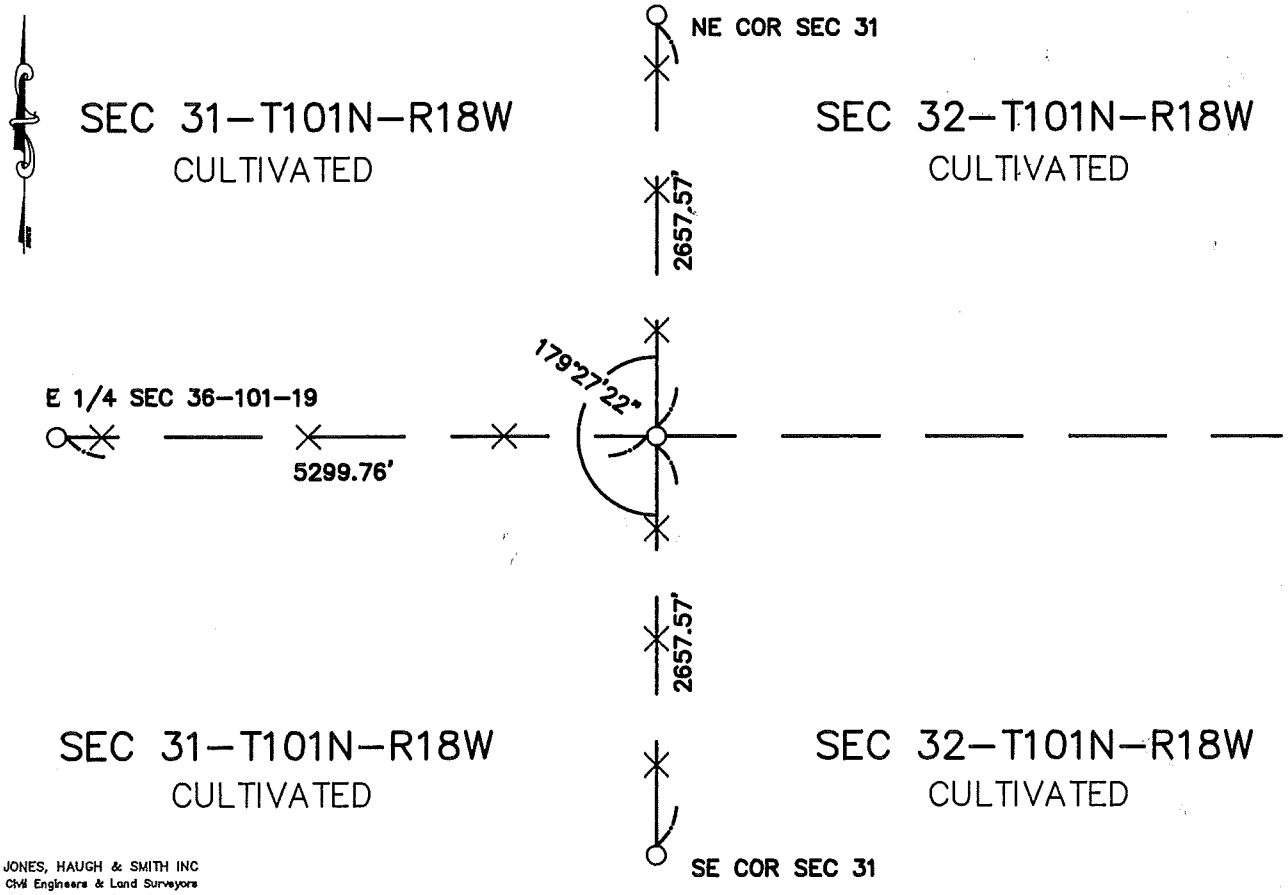

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 11-10-97
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

E 1/4 Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand and located the remains of a wood corner fence post. Found no other evidence of original PLS corner. Placed a cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a LARGE STONE WITH SMALL STONES SURROUNDING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

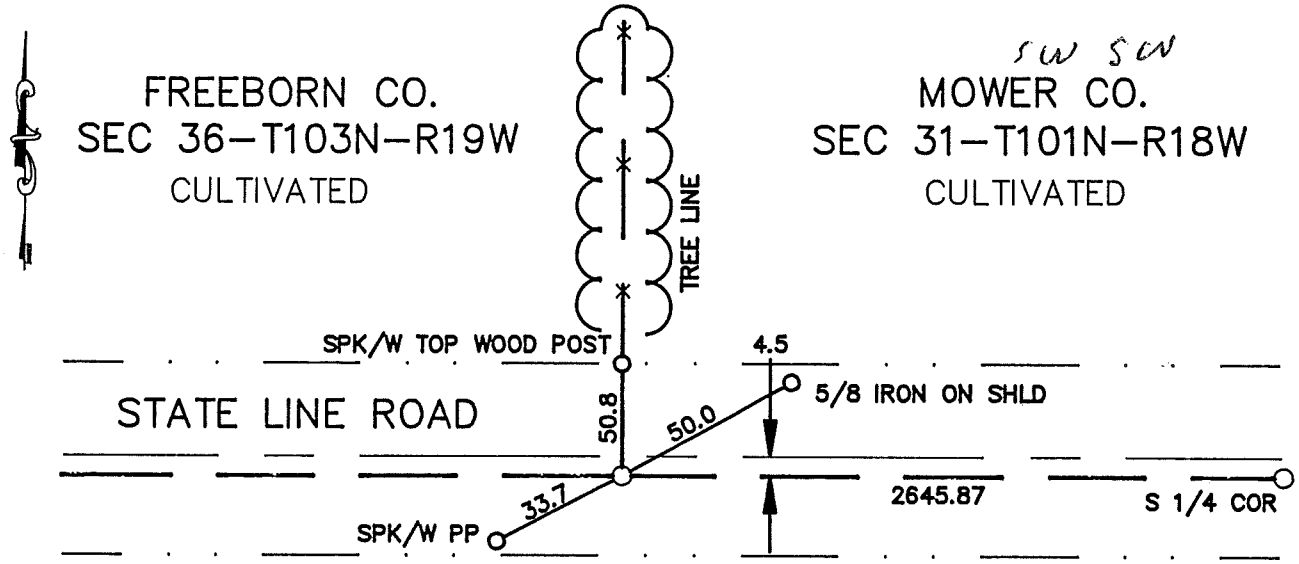

STATE OF IOWA

BLDG SITE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 275

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455955

M.H.D. FORM NO. 2105

Book 96 Misc Page 275

SW Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Freeborn County Highway Department
Freeborn County Recorder
Zenk Engineering
Tucker Land Surveying

John Nielsen records state he uncovered a rock with smaller rock around 2.3' north of Iowa section line and 4'+/- north of road shoulder.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of road and in line with line fence north. Uncovered rock with smaller ones around it. Rock fit line fence north and was 5.0'+/- north of south shoulder. Placed a 5/8" iron capped 13807 west of rock. Placed a cast iron monument over rock found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 31, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

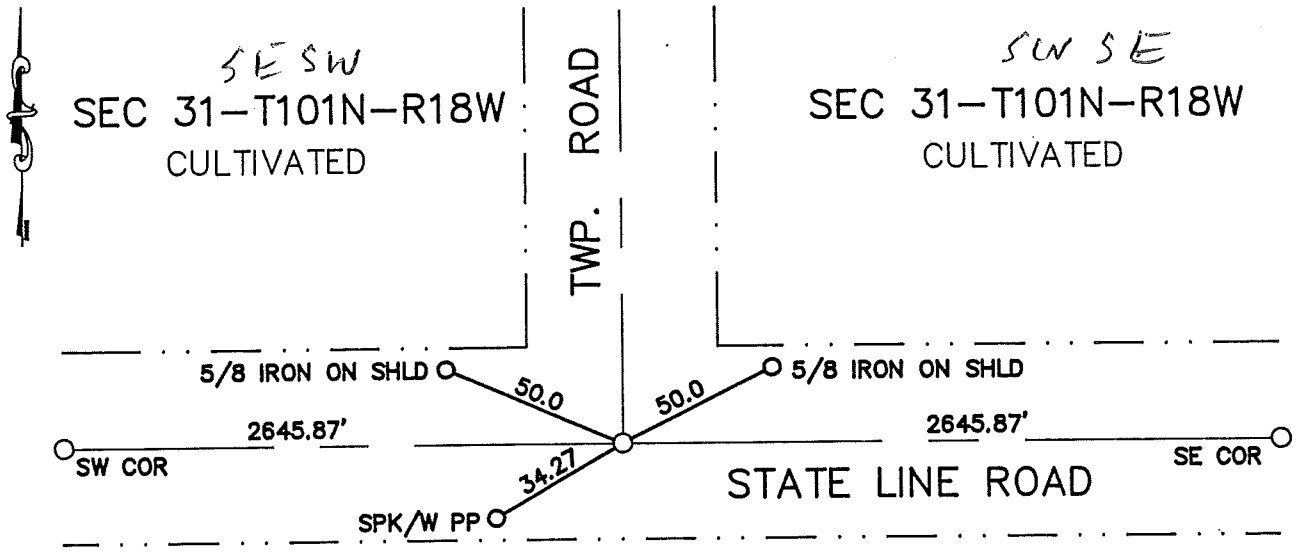

STATE OF IOWA

BOOK 96 PAGE 273

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Engel

By Susan M Davis, Deputy

DOCUMENT NO. 455954

M.H.D. FORM NO. 2105

Book 96 Misc Page 273

S 1/4 Cor SEC 31-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL intersection twp. roads E-W-N. No evidence was found of the original PLS corner. A cast iron monument was set at the midpoint of a straight line between the SW and SE corners of the section.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 32, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a 2'X1 1/2' ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

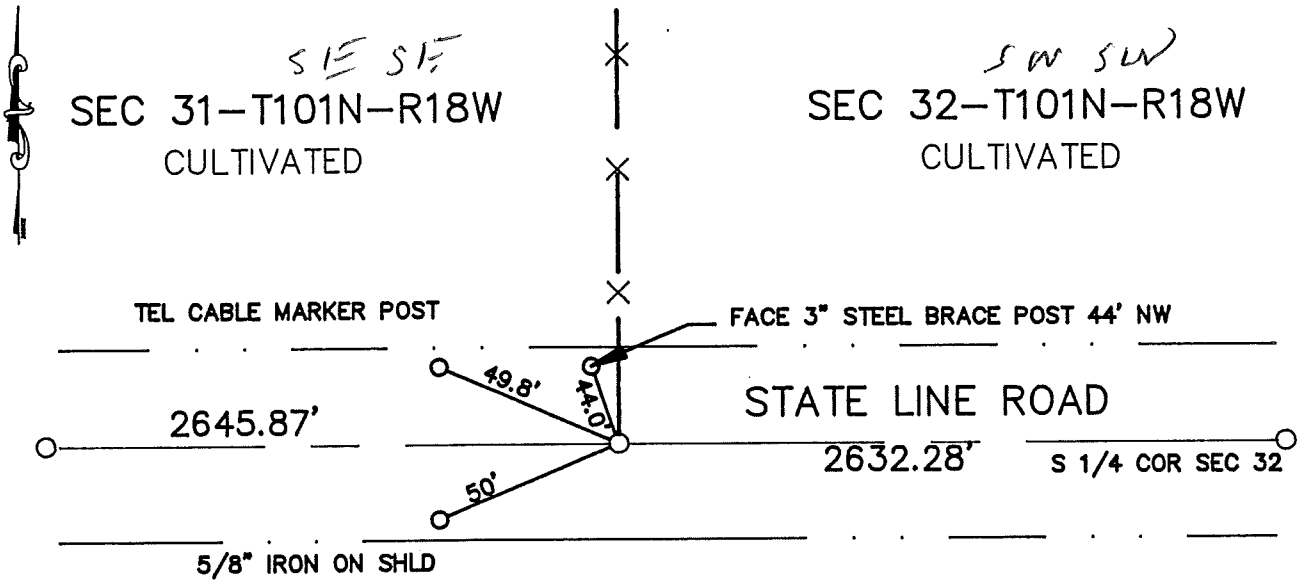

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 277

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455956

M.H.D. FORM NO. 2105

Book 96 Misc Page 277

SW Cor SEC 32-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of State Line Road. Uncovered a 2'x1 1/2' rock 2' below road surface. Placed a 5/8" iron capped 13807 on the west side of stone found. Placed a cast iron monument over stone 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 32, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/01/1997 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/01/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

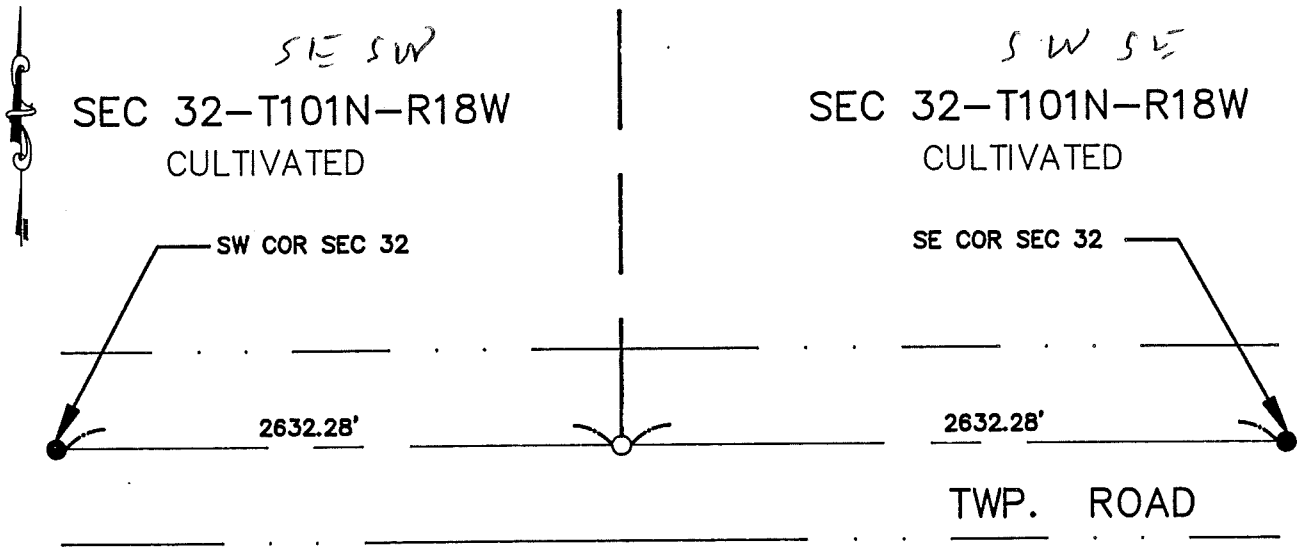

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 279

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M Davis, Deputy

DOCUMENT NO. 455957

M.H.D. FORM NO. 2105

Book 96 Misc Page 279

S 1/4 Cor SEC 32-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of State Line Road E-W. Dug to virgin soil and found no evidence of original PLS corner. Placed a cast iron monument on a split between the SW and SE section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a PK NAIL OVER DRILL BIT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

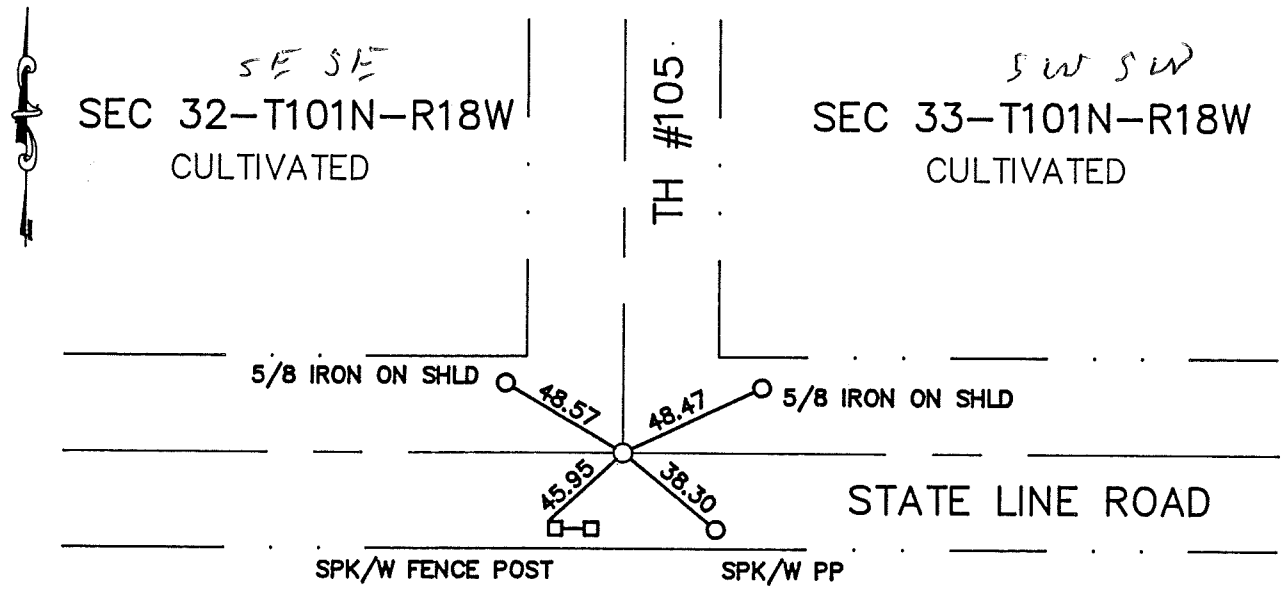

STATE OF IOWA

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 281

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-12-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A.M. on the 8 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 455958

M.H.D. FORM NO. 2105

Book 96 Misc Page 281

SW Cor SEC 33-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1996 TH #105 plans show a monument in place at this location.

1987 Jones Haugh and Smith crew used found 5/8" iron for survey.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at location of found PK nail. Found 3/4" x 3.4' iron agreeing with location on TH #105 road plans. Accepted drill bit as a perpetuation of the original PLS corner and set a cast iron monument over, at the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 33, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-6-87 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

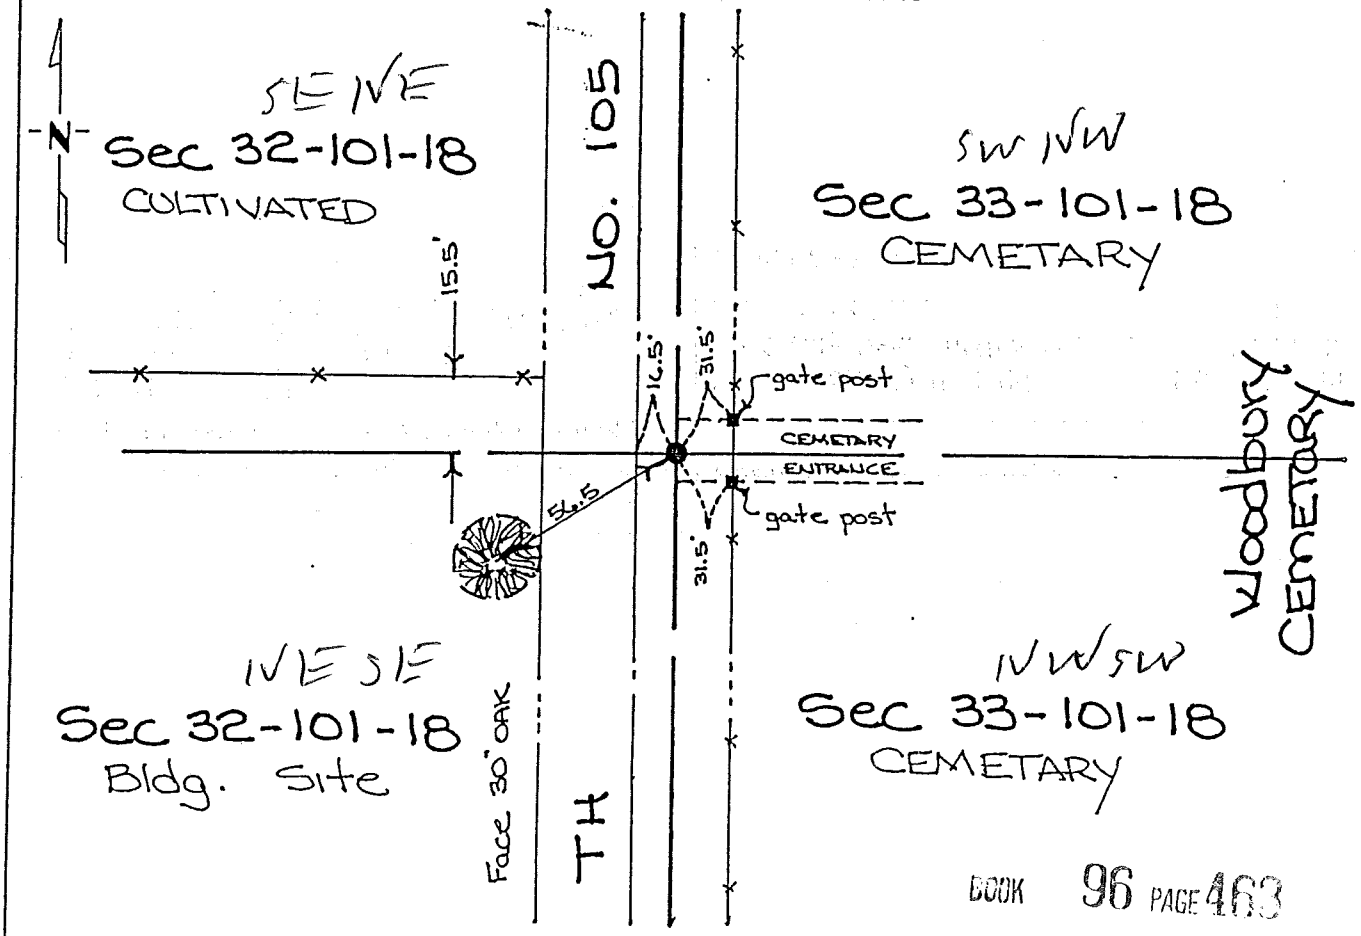

BOOK 96 PAGE 463

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 3-20-87
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 4 P .M. on the 10 day of Oct A.D., 1987

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 456782

MHD FORM NO. 2105

Book 96 Misc Page 463

STATEMENT OF EVIDENCE

W¼ corner Sec 33-101-18

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show corner was marked with a wood post and tied to bearing trees marked:

10" Burr Oak N 71½° E 81 Links
9" Burr Oak N 85° W 390 Links

February 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department
Mower County Recorder
Ray Tucker, Land Surveyor
Minnesota Department of Transportation

The following information was obtained from the Mower County Recorder:

Copy of Woodbury Cemetery Plat filed in 1874 (Cemetery founded in 1855)
Copy of new addition Woodbury Cemetery Plat filed in 1967

Cemetery plats indicate ¼ corner was found and used during platting of original cemetery and new addition.

1987 Jones, Haugh & Smith crew using information on cemetery plats established position of W¼ corner and set cast iron monument.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 36, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/02/1996 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/02/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

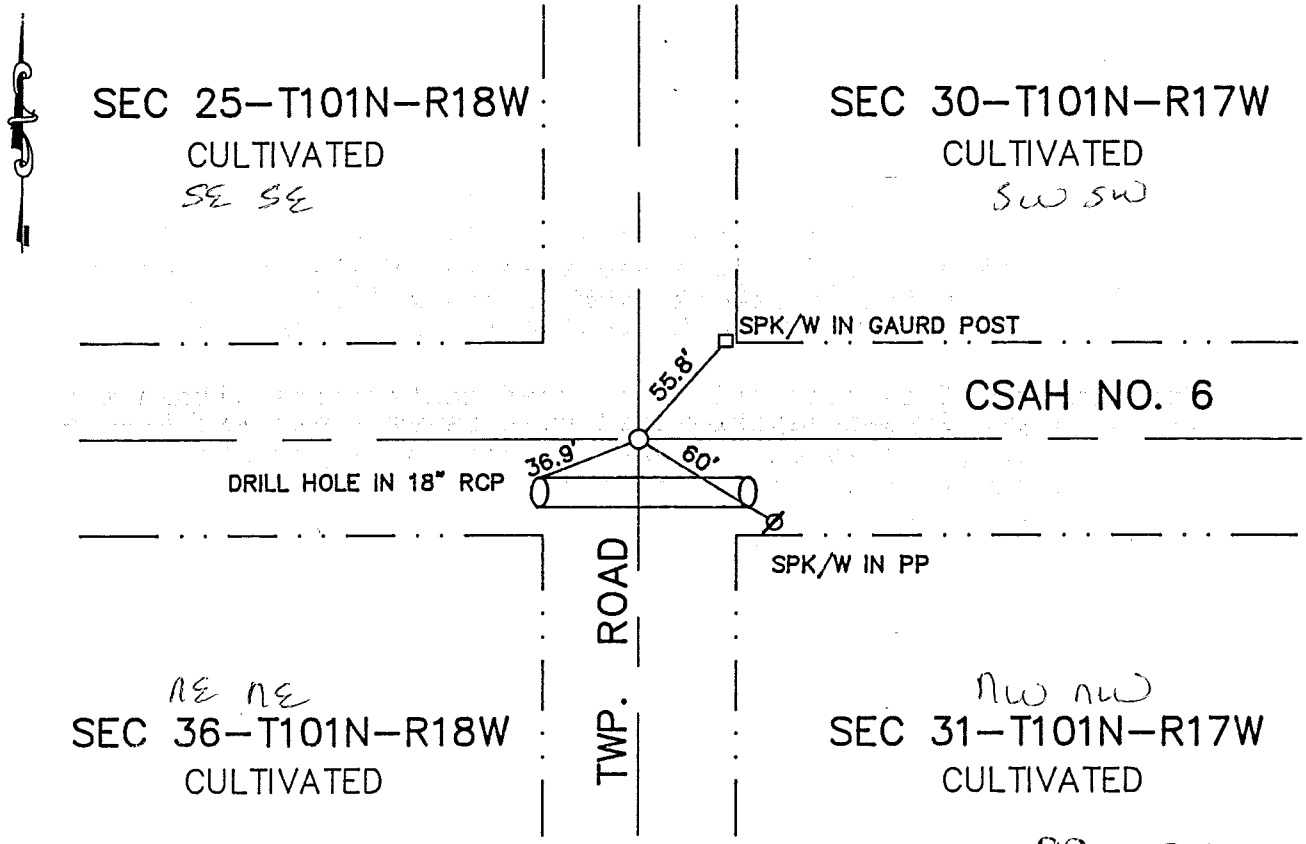

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 92 PAGE 214

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-16-96 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P .M. on the 19 day of August A.D., 1996

COUNTY RECORDER Charles Singer

By Susan M. Davis, Deputy

DOCUMENT NO. 447266

M.H.D. FORM NO. 2105

Book 92 Misc Page 214

NE Cor SEC 36-101-18

This corner was originally established by Deputy William I. Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County R/W plans show a concrete monument at this location.

Jones Haugh and Smith records show a concrete monument at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a cast iron monument which agrees with location shown on CSAH NO.6 R/W plans and past survey records. Accepted this position as perpetuation of PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

"U" p27

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 33, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 3-6-87 (DATE) placed a Cast iron monument

SKETCH OF REFERENCE TIES

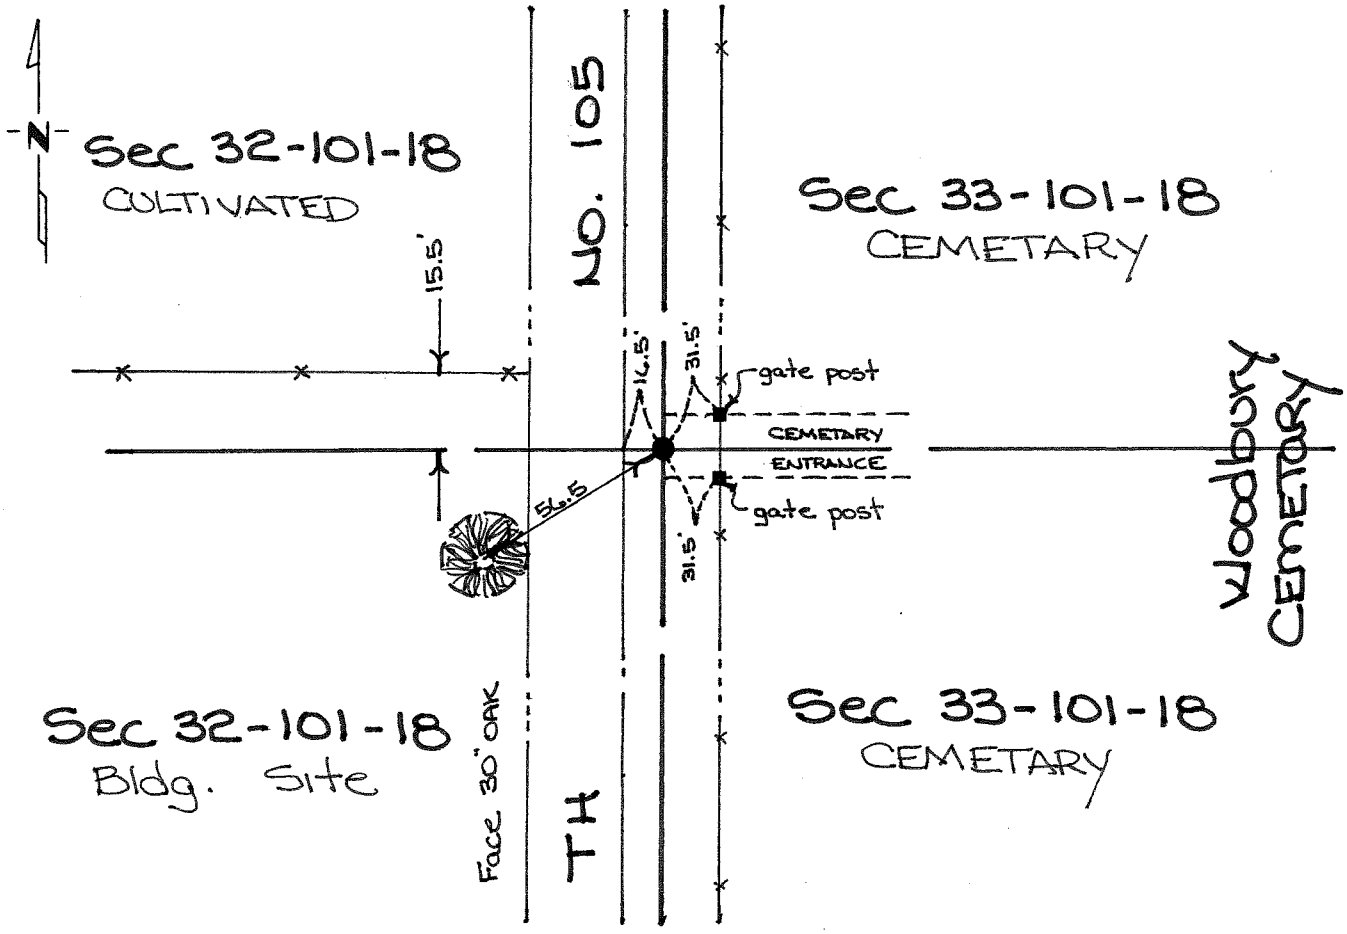

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ 3-20-87
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W¼ corner Sec 33-101-18

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show corner was marked with a wood post and tied to bearing trees marked:

10" Burr Oak N 71½° E 81 Links
9" Burr Oak N 85° W 390 Links

February 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Highway Department
Mower County Recorder
Ray Tucker, Land Surveyor
Minnesota Department of Transportation

The following information was obtained from the Mower County Recorder:

Copy of Woodbury Cemetery Plat filed in 1874 (Cemetery founded in 1855)
Copy of new addition Woodbury Cemetery Plat filed in 1967

Cemetery plats indicate ¼ corner was found and used during platting of original cemetery and new addition.

1987 Jones, Haugh & Smith crew using information on cemetery plats established position of W¼ corner and set cast iron monument.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

TIE BOOK P. 92

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 34, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 8-30-85 (DATE) found a 2½" x 1½" x 30" iron bar

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

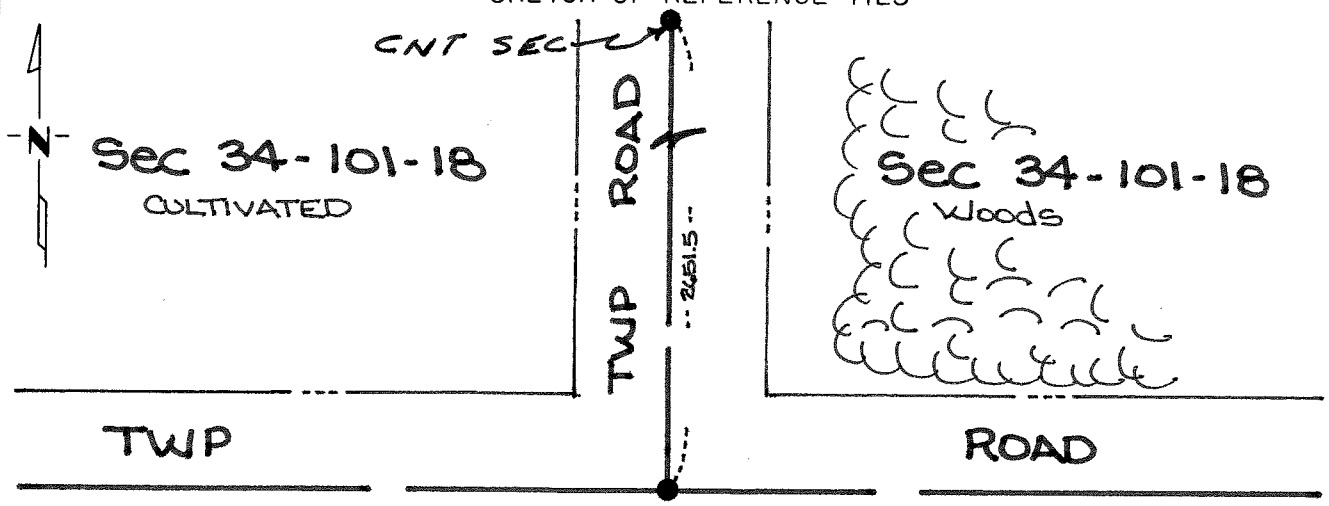

STATE OF IOWA

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-10-85 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

$S\frac{1}{4}$ cor Sec 34-101-18

1852 Andrew Talcot, Deputy Surveyor, set wood post during public land survey.

1895 Clausen, Mower County Surveyor, found wood post and set a $2\frac{1}{2}$" x $1\frac{1}{2}$" x 30" iron bar.

1985 Jones, Haugh & Smith Inc crew dug on centerline centerline of township roads north - east - west and found a $2\frac{1}{2}$" x $1\frac{1}{2}$" x 30" iron bar. Accepted bar as corner set by Clausen.

Corner found fits occupation and road centerlines within the section and records by previous surveyors and is accepted as a perpetuation of the original public land survey corner.

"B" P 43

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 36, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 1-27-87 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

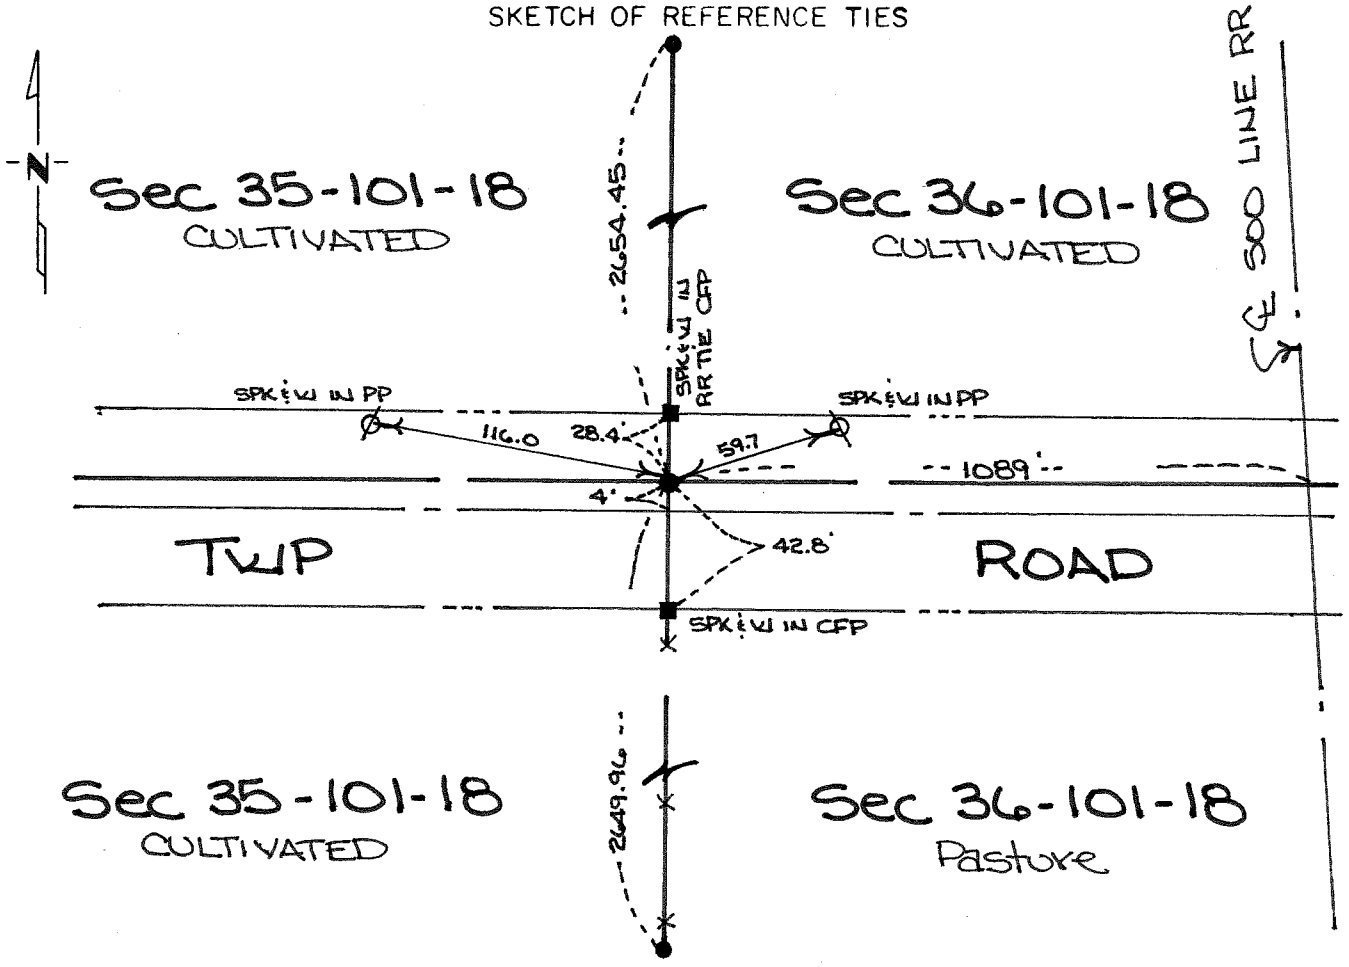

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-20-87 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W¼ corner Sec 36-101-18

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office, in 1854. The government notes show a corner was marked with wood post and charred stake with mound and trench.

January 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Minnesota Department of Transportation
Ray Tucker, Land Surveyor
Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad)
Chicago NorthWestern Transportation Company (formerly Chicago, Great Western Railroad)
Cedar Valley Railroad (formerly Illinois, Chicago Railroad)

The following information was obtained from the Mower County Recorder:

Plat of Village of Lyle
Plat of Outlots in SW¼ Sec 36-101-18

The following information was obtained from the Chicago NorthWestern Railroad (formerly Chicago Grest Western Railroad):

Railroad Stationing Map through Lyle, Minnesota

The following information was obtained from the Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad):

Railroad Stationing Map through Lyle, Minnesota

1987 Jones, Haugh & Smith Inc crew dug with backhoe across township road at a distance of 1089 feet west of the centerline of the Soo Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad), as shown on the Railroad Station Map and shown on Plat of Outlots in the SW¼ Section 36-101-18. Dug a hole 5'x15'x6' deep and found no evidence of public land survey corner or a perpetuation thereof. Therefore we established the ¼ corner using the centerline of the Soo Line Railroad and monuments found in the Plat of the Original Village of Lyle which were also used to establish the center of section. The west ¼ corner was set on an extension from the E¼ corner through center of section and 1089.0 feet west of the centerline of the Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad). Set cast iron monument.

The monument set fits monuments and occupation lines within the section and the City of Lyle and is in agreement with recorded Plats and Railroad Station Maps and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

Index No. "I" p 55

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 1-27-87 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

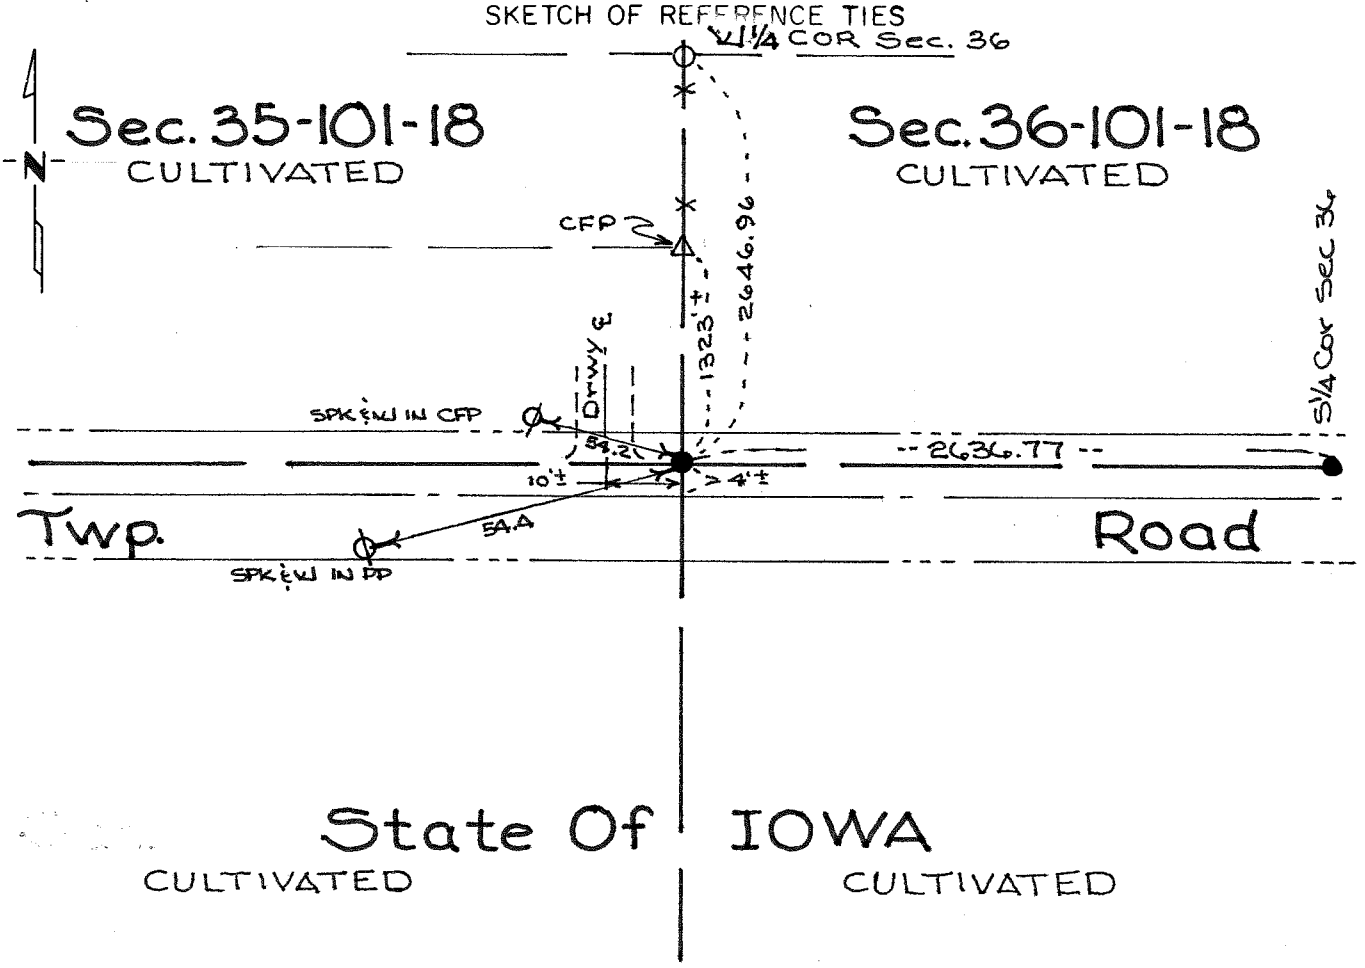

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 3-26-87 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 36-101-18

This corner was originally established by Andrew Talcott Deputy Surveyor for the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post in a mound of earth and trench.

1. January 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

   Mower County Recorder
   Mower County Highway Department
   Minnesota Department of Transportation
   Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad)
   Chicago Northwestern Transportation Company (formerly Chicago, Great Western RR)
   Mitchell County Highway Department

2. The following information was obtained from the Mower County Recorder:

   The Plat of the Village of Lyle
   The Plat of Outlots in the SW¼ Section 36-T101N-R18W

3. The following information was obtained from the Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad)

   Railroad Station Map

4. The following information was obtained from the Chicago Northwestern Transportation Company (formerly Chicago Great Western Railroad)

   Railroad Station Map

1987 Jones, Haugh & Smith crew dug with a backhoe a 12'x5'x5' deep hole at a position established by using information on the Plat of Outlots in the SW¼ Section 36-T101N-R18W, and Railroad Stationing maps from Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad) and the Chicago Northwestern Railroad (formerly Chicago, Great Western Railroad) and by using occupation and fence lines within the section. No evidence of public land survey corner or a perpetuation were found. Therefore established position of this corner using information obtained from Items 1, 2, 3 & 4, and placed the corner on an extension from the southeast section corner through the S¼ corner and set a cast iron monument.

The monument set fits occupation and fence lines within the section and is in agreement with recorded Plat dimensions and information on Railroad Station Maps and is accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis contact Jones, Haugh & Smith.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 36, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/16/1996 (DATE) found a CAST IRON MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/16/1996 (DATE) placed a –

SKETCH OF REFERENCE TIES

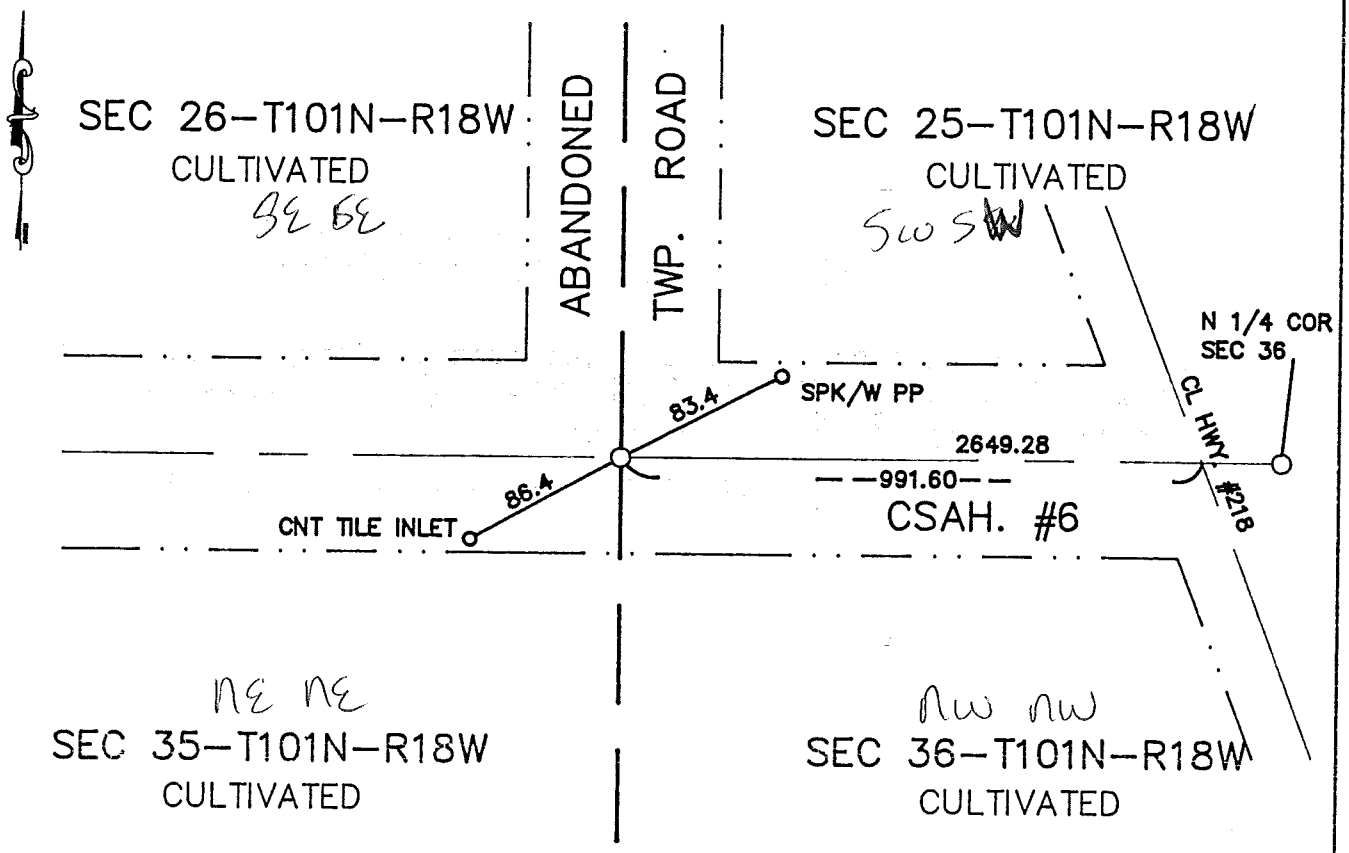

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page. BOOK 91 PAGE 560

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-19-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 22 day of July A.D., 1996

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 446549

M.H.D. FORM NO. 2105

Book 91 Misc Page 560

NW Cor SEC 36-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County R/W plans show a corner in place at this location.

1976 JHS survey shows a position for corner at this location.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a cast iron monument at this location which was set after CSAH 6 was regraded. Corner is in agreement with 1976 survey notes, with CSAH #6 R/W plans, and TH. #218 R/W plans and is accepted as a perpetuation of the original PLS corner.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Book 2021 "F" p. 42

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 36, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 1-27-87 (DATE) found a pointed limestone on N. side of large nigger head

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-27-87 (DATE) placed a cast iron monument between

SKETCH OF REFERENCE TIES

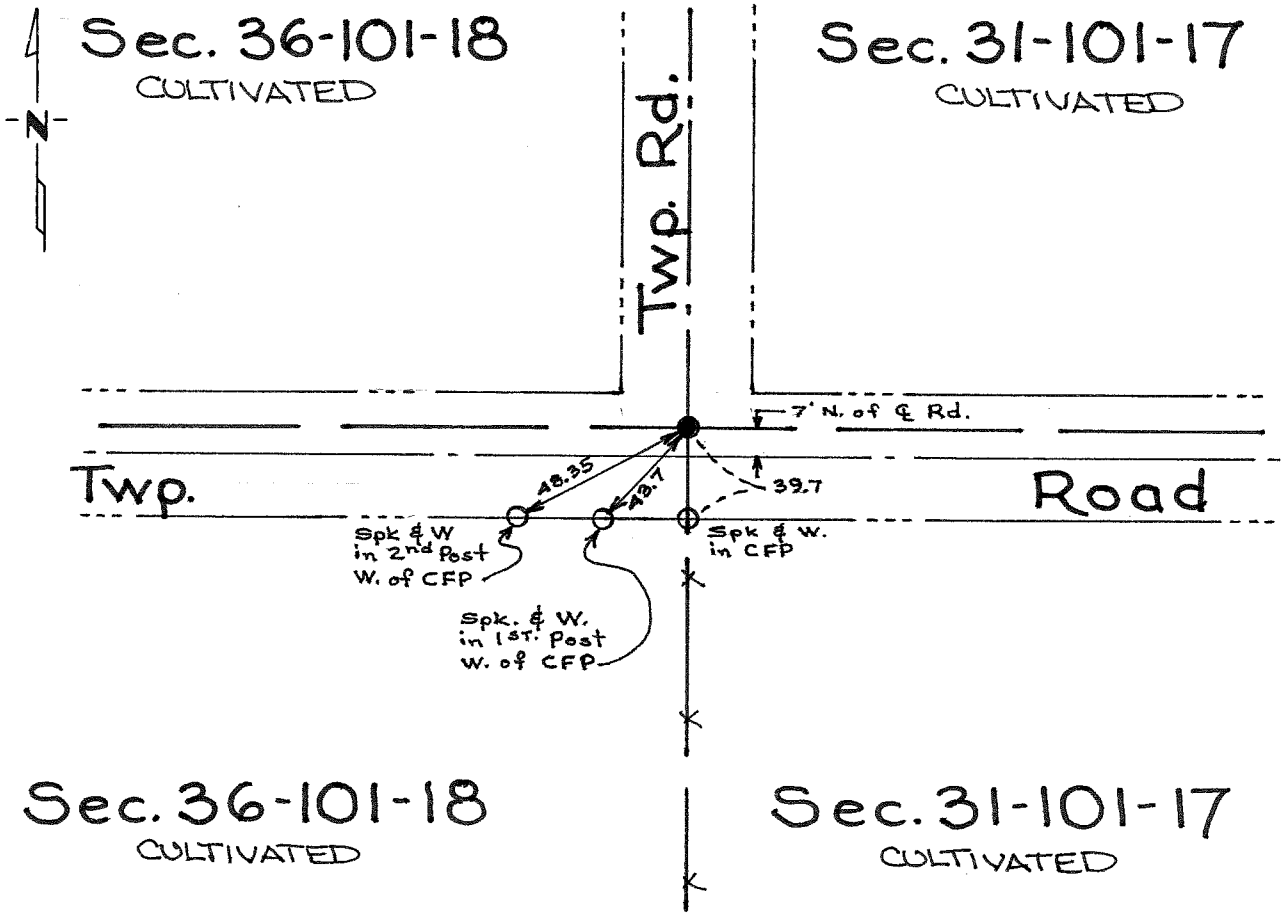

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 5-25-87 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E¼ cor Sec 36-101-18

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office in 1854. The government notes show corner was marked with wood post and mound of earth and drove charred stake.

January 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Minnesota Department of Transportation
Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad)
Chicago North Western Railroad (formerly Chicago Great Western Railroad)
Mitchell County Highway Department

The following information was obtained from the Mower County Recorder:

The Plat of the Village of Lyle
The Plat of Outlots in the SW¼ Section 36 - T101N - R18W

The following information was obtained from the Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad):

Railroad Station Map

The following information was obtained from the Chicago North Western Railroad (formerly Chicago Great Western Railroad):

Railroad Station Map

The following information was obtained from the Mower County Highway Department:

County Grading Plans for road in and around the Village of Lyle

1987 Jones, Haugh & Smith Inc crew, after traversing around the section and using information on Village Plat and Railroad Station maps, calculated position of corner to be 7 feet north of the centerline of the east-west road on centerline of road north. Dug a hole 7 feet in diameter, 3 feet deep and uncovered a large pointed field stone on the north side of a large nigger head in virgin soil. Set cast iron monument over stones.

Monument found fits occupation within the section and is in agreement with past records and was accepted as a perpetuation of the original public land survey corner.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

"C" p121

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 36, Township 101 N, Range 18 W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 1-27-87 (DATE) found a 5/8" ø iron

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

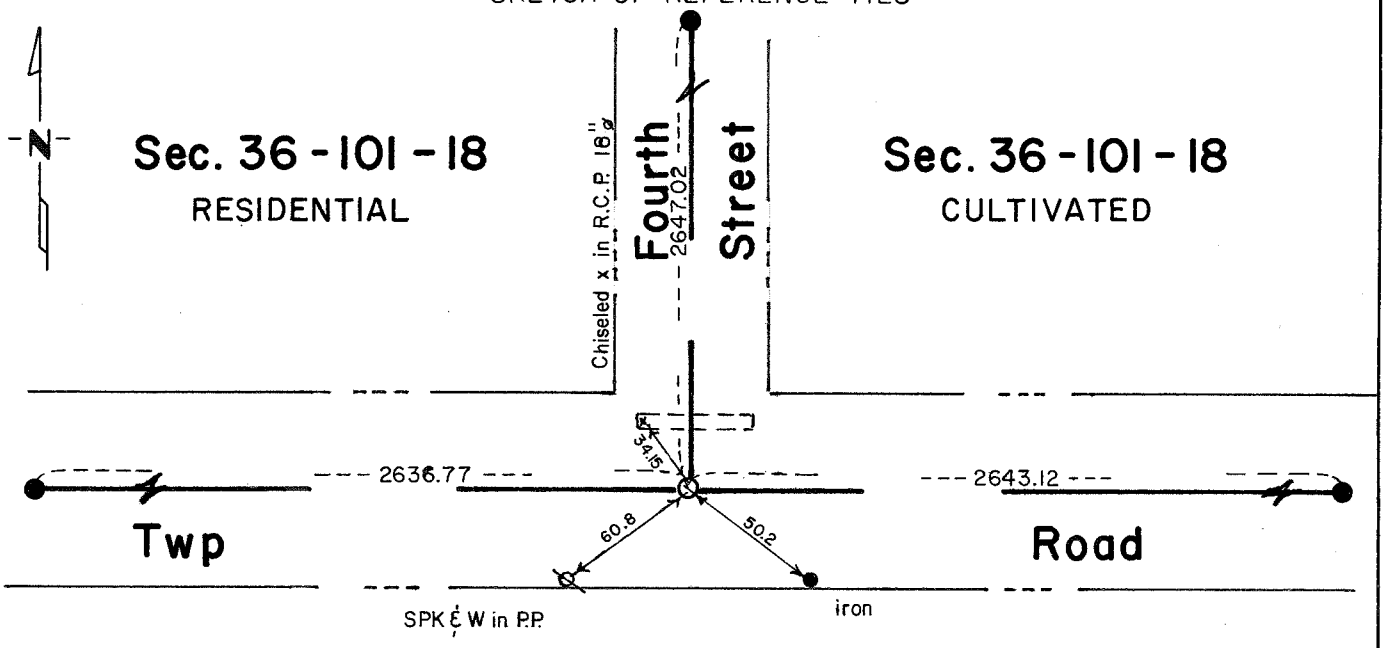

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ (SIGNATURE) 12-12-88 (DATE)

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
S¼ corner Section 36-101-18

This corner was originally established by Deputy Surveyor Andrew Tallcott of the US General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:

Mower County Engineering Department
Mitchell County Engineering Department
Mower County Recorders Office

Plat of the original town shows corner was found.

Mower County Engineering Office, county road project shows an iron was found.

Mitchell County Engineering Office said through telephone conversation they uncovered an iron monument and took ties.

1987 Jones, Haugh & Smith crew uncovered a 5/8" diameter iron. Continued digging and uncovered no further evidence of public land survey corner.

The monument found agrees with the plat distance of the original town and agrees with records from Mitchell County and Mower County Engineering Departments.

For electronic survey data and analysis, contact firm of Jones, Haugh & Smith

"C" P55

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 36, Township 101N, Range 18W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 1-27-87 (DATE) found a bridge spike 4' deep

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1-27-87 (DATE) placed a cast iron monument over

SKETCH OF REFERENCE TIES

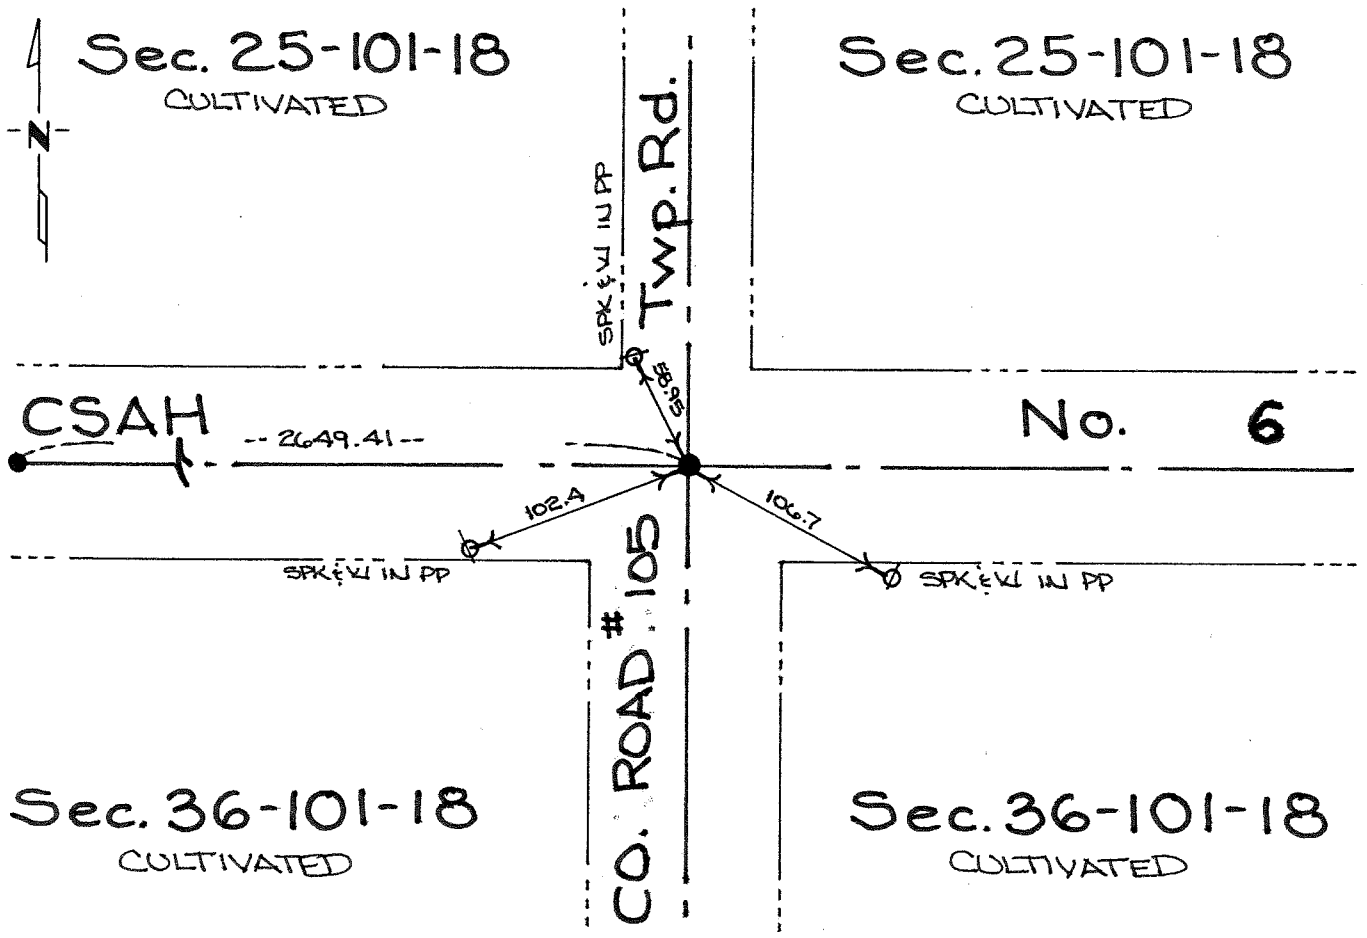

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-15-87

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N¼ corner Section 36-101-18

This corner was originally established by William I. Anderson, Deputy Surveyor for the U.S. General Land Office in 1854. The government notes show corner was marked with a wood post in mound with charred stake.

January 1987 Jones, Haugh & Smith Inc contacted the following for corner information:

Mower County Recorder
Mower County Highway Department
Minnesota Department of Transportation
Soo Line Railroad (formerly Chicago, Milwaukee, St. Paul & Pacific Railroad)
Chicago North Western Railroad (formerly Chicago Great Western Railroad)

The following information was obtained from the Mower County Highway Department:

County grading plan shows a concrete monument was uncovered and ties were taken, and stationing shows corner was 1657 feet east of centerline of Highway No. 218.

1987 Jones, Haugh & Smith Inc crew dug a 3'x5'x4' deep hole 1657 feet east of the centerline of Highway No. 218 at the intersection of a tie to a power pole established by Mower County Highway Department in 1958. One foot below road surface, uncovered a 60d spike set by Jones, Haugh & Smith Inc crew in 1970 more or less. Continued digging and at a depth of four feet below road surface uncovered a bridge spike in old roadbed. Continued digging and at a depth of five feet hit virgin soil and found no evidence of concrete monument recorded by Mower County Highway Department or original public land survey corner.

Accepted bridge spike as best evidence of a perpetuation of the original public land survey corner.

The monument fits occupation and road centerlines within the section and is in agreement with past records. A cast iron monument was placed over bridge spike.

For electronic survey data and further analysis, contact Jones, Haugh & Smith Inc.

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

35, 36, T. 102 N. (Lyle Twps.)

Corner to Sec. 2, 1, T. 101 N. T. ..... R. 18 W.

State of Minnesota }
County of Mower } ss.

Tie book P. 86

I hereby certify that on the first day of June 19 29.

I found the Section Corner referred to above

which was evidenced by Iron stake


and I further certify that to perpetuate the location of such corner I did at the exact location thereof place a permanent marker consisting of Concrete monument 6 x 6 x 24 inches with steel rod in center.

I further certify that I established two

reference or witness monuments consisting of 6 inch willow and 6 inch balsam trees

which reference or witness monuments are located in the manner following:

Diagram of reference points shown below.

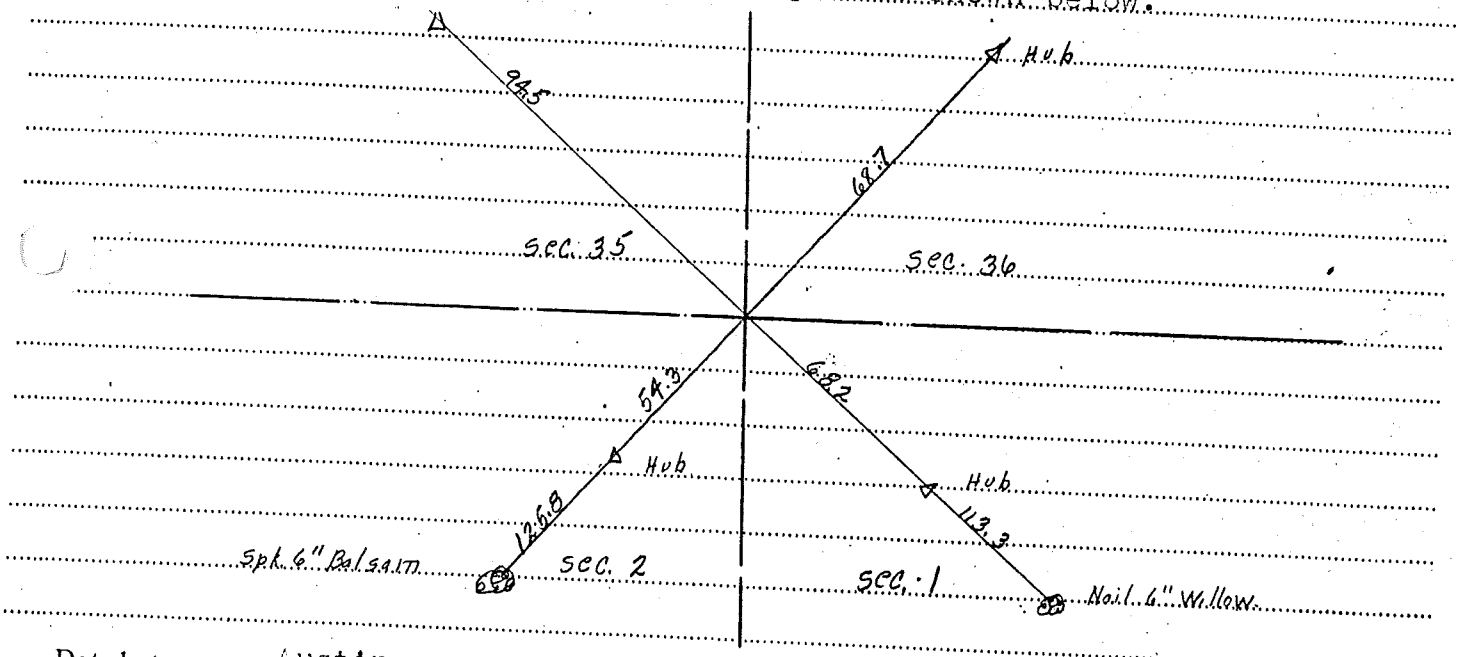

Dated at Austin Minn., this 29th day of December 19 29.

Resident Engineer

OFFICE OF REGISTER OF DEEDS }
County of ..... } ss.

I hereby certify that the within instrument was filed in this office for record on the ..... day of ..... A. D. 19 ..... at ..... o'clock ..... M.

Register of Deeds

By ..... Deputy

F

G

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 33, Township 101N Range 18W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 08/09/1996 (DATE) found a PK NAIL OVER A 3/4" DRILL BIT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 08/09/1996 (DATE) placed a —

SKETCH OF REFERENCE TIES

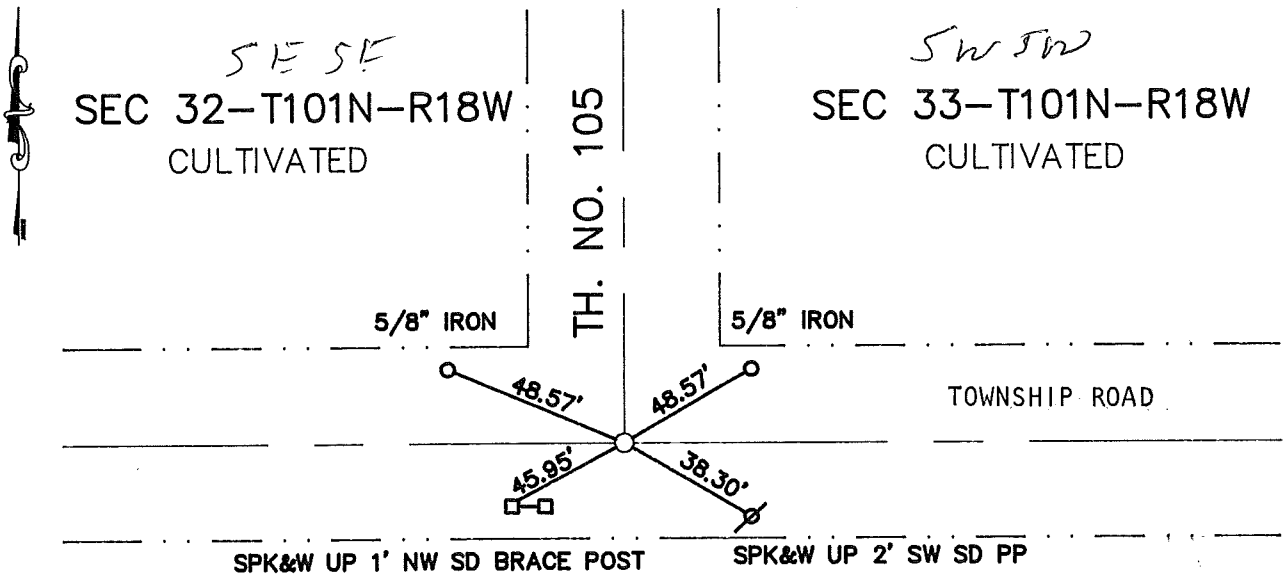

STATE OF IOWA

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 554

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-7-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 452226

M.H.D. FORM NO. 2105

Book 94 Misc Page 554

SW Cor SEC 33-101-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County Highway Department road plans for TH. No. 105 show a monument inplace.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at CL of township road north and 1' south of CL on township road E-W. Located PK nail at road surface with a 3/4" drill bit 0.5" below road surface.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.