I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

Steven J. Thompson — Date 7-29-25

Registration No. 22705

☒ Land Surveyor, ☐ Professional Engineer
☐ County Surveyor, ☐ County Engineer

MOWER COUNTY COORDINATES
NAD 83 (96) HARN
Northing=N138458.03 Latitude=N043°36'05.249745"
Easting=E754442.53 Longitude=W092°59'22.220919"

A689087

Office of the County Recorder
Mower County, Minnesota

I HEREBY CERTIFY THE WITHIN INSTRUMENT WAS FILED, AND/OR RECORDED ON 8/13/2025 8:16 AM

PACKAGE: 110305 **REC FEE: $0.00**

Sara Madison, Mower County Recorder

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section **33**, Township **102N** Range **18W**, **5th** P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On **4/11/2025** (DATE) found **NOTHING**

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On **4/11/2025** (DATE) placed a **5/8" REBAR & YELLOW CAP STAMPED 22705**

SKETCH OF REFERENCE TIES

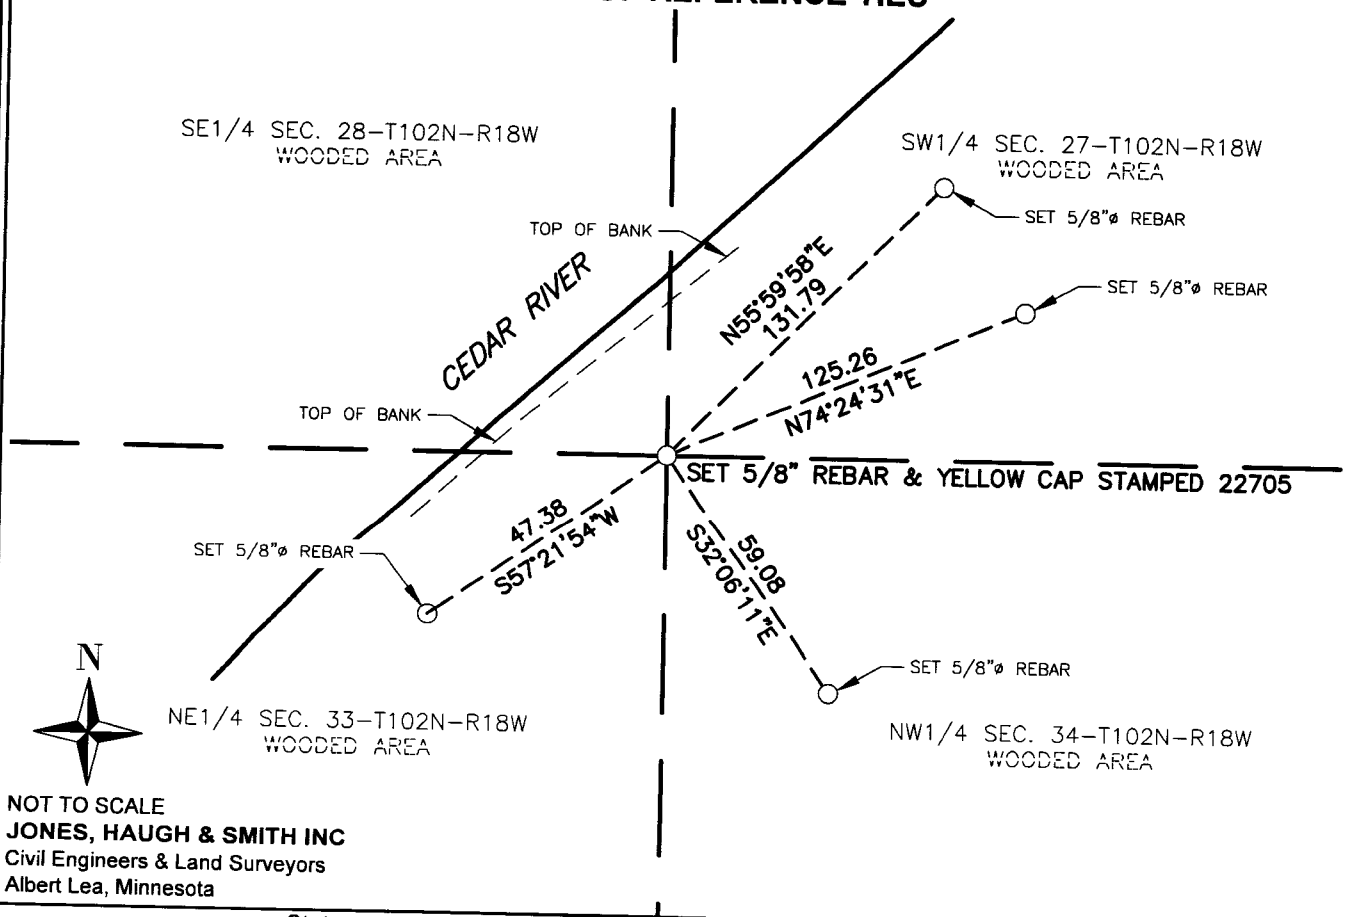

NOT TO SCALE

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

STATEMENT OF EVIDENCE

NE Corner Section 33-T102N-R18W

July 1854: This corner was originally established by Deputy Surveyor William I. Anderson of the U.S. General Land Office in July, 1854. The government notes show a wood post was set with a mound of earth and trench.

May 28, 1917: M. Clausen surveyed outlots in S1/2 SW1/4 Section 27-T102N-R18W and shows southwest corner of Section 27 and stone at northwest corner of S1/2 SW1/4 of Section 27.

November 5, 1986: Jones, Haugh & Smith crew calculated corner position from plat of outlots and accepted as the best evidence of original public land survey corner location.

April 11, 2025: Jones, Haugh & Smith crew searched a 10' radius of corner location and found no monument. Used obliterated methods to recover corner position from existing monumentation and occupation lines and set 5/8" rebar & yellow cap #22705 and made ties.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.


MONUMENT


EAST


NORTH