Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 31, Township 102N Range 14W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/2004 (DATE) found a STONE WITH CONC. MONUMENT AND HUB

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/2004 (DATE) placed a 5/8"X16" IRON WITH CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

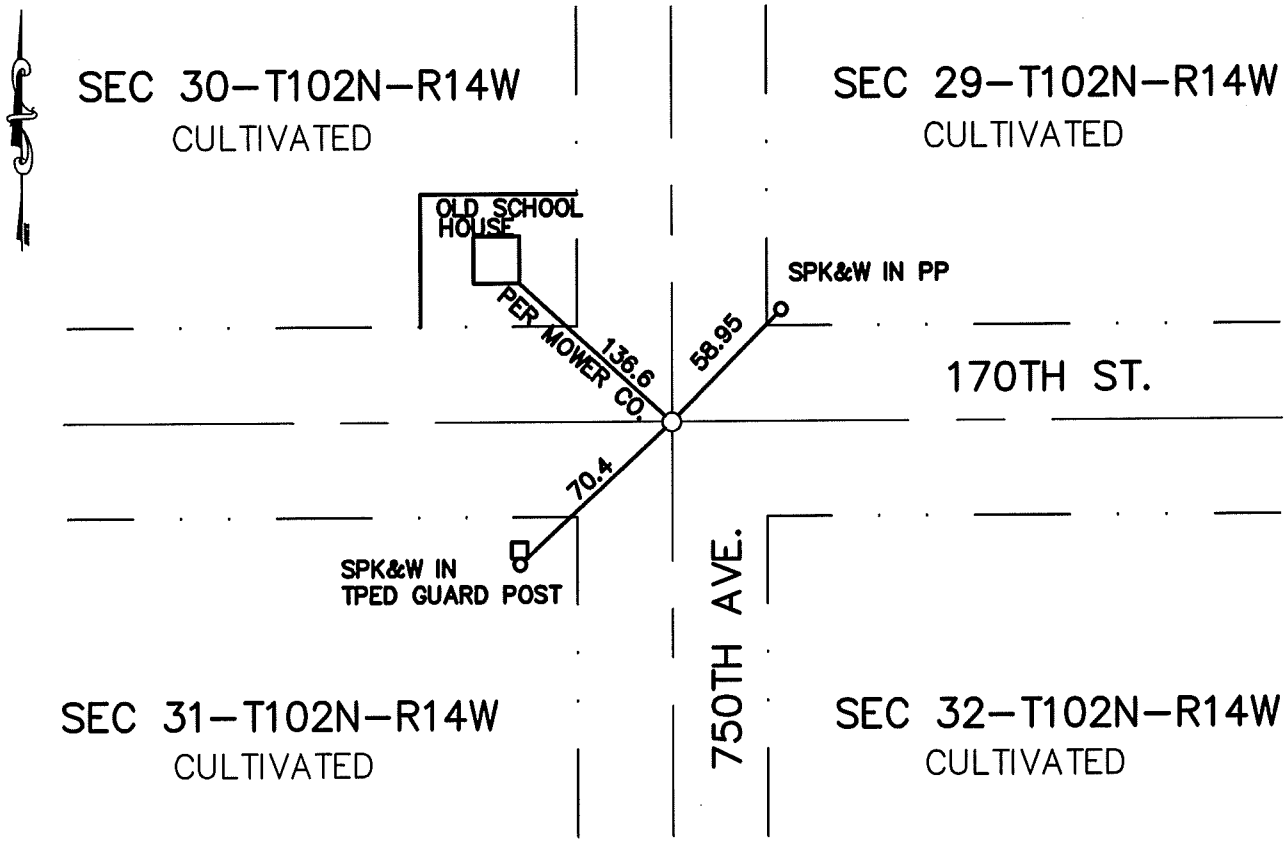

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-30-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Corner Section 31-T102N-R14W

Deputy Surveyor John Taylor of the U.S. General Land Office originally established this corner in 1853 . The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Department
Mower County Recorder
Tucker Land Surveying

06/01/2004 Mower County records show a stone at the section corner. There is also a concrete monument above said stone with a hub on the north side of concrete monument. One tie to the southeast corner of school house; 136.6'.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Boe Brothers backhoe at centerline centerline of township roads north-south and east-west. Uncovered a concrete monument with stone underneath and a hub on the north side of concrete monument. Placed a capped 5/8"x16" rebar capped #13807 on the south side of stone. Placed a 5/8"x16" rebar with cast iron monument above monuments found 0.6' below road surface.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.