Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 103N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 4/13/1992 (DATE) found a 3/4" PIPE OVER CLAY BRICK OVER POINTED STONE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/13/1992 (DATE) placed a 5/8" DIA. IRON CAPPED RLS 13807 OVER STONE.

SKETCH OF REFERENCE TIES

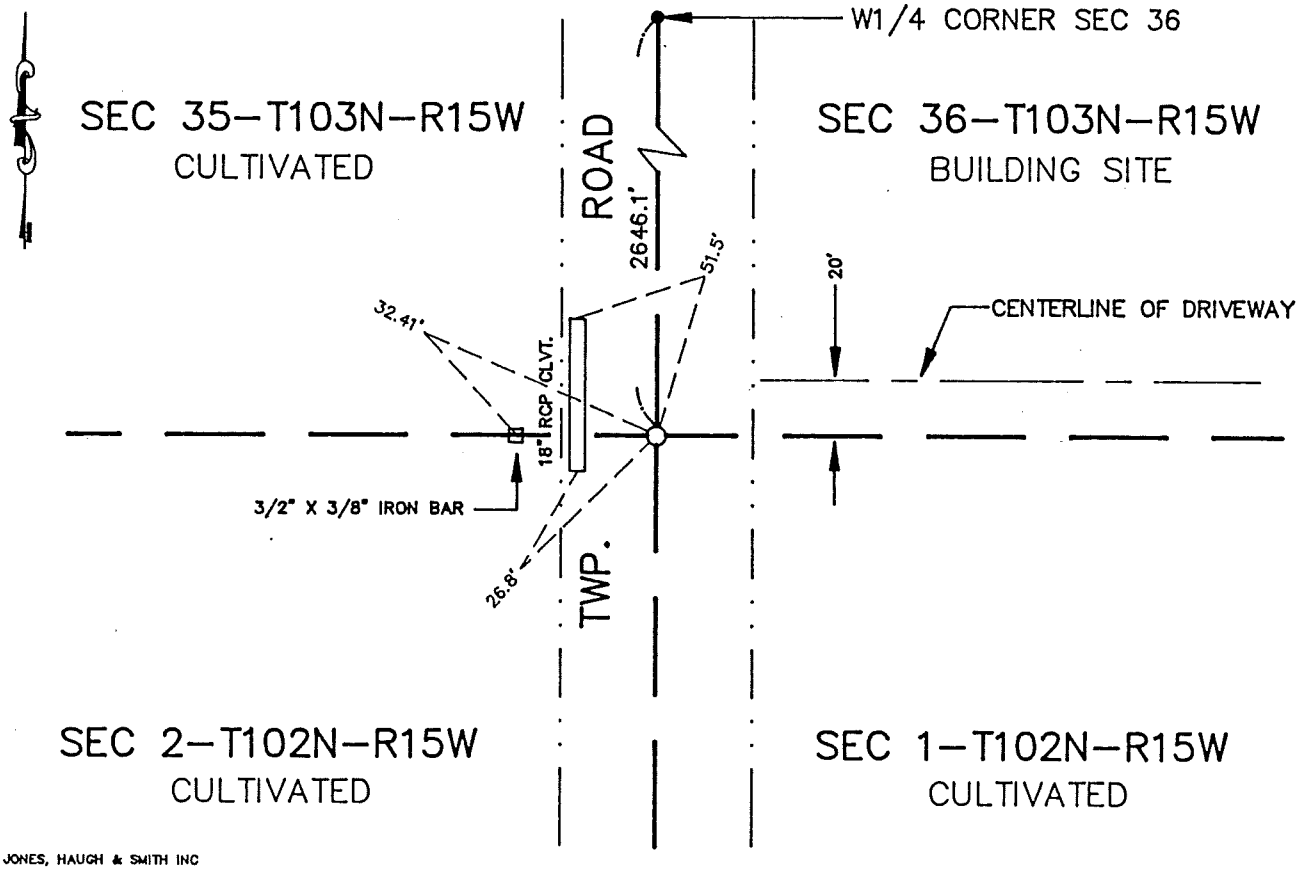

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-24-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Section 36-103-15

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1889 Clausen field notes indicate a stone monument inplace at the southwest corner.

1945 Book A in the office of the Mower County Highway Department shows a concrete monument inplace at the southwest corner. The following ties were taken:
70.7' NE to 3rd fence post on twp rd
73.5' SE to iron fence post on twp rd
44.5' SE to tele pole
49.9' W to iron fence post in concrete on fence line
64.7' W to 3rd iron fence post on fence line

1992 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte IV, dug with county backhoe and uncovered a 3/4" capped pipe one inch deep. Continued digging and uncovered a clay brick 19" deep over pointed stone 6"x16". Placed 5/8" iron capped RLS 13807 under stone and set iron. Found 1 1/2" x 3/8" iron bar 32.41 feet from southwest corner. Set by C.E. Milner RLS as tie to corner in 1955.

The monument found fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 36, Township 103N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-13-1992 (DATE) found a POINTED FIELD STONE WITH CLAY BRICK OVER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-13-1992 (DATE) placed a 5/8" DIA. IRON UNDER STONE AND A 5/8" DIA. IRON CAPPED RLS 13807 OVER.

SKETCH OF REFERENCE TIES

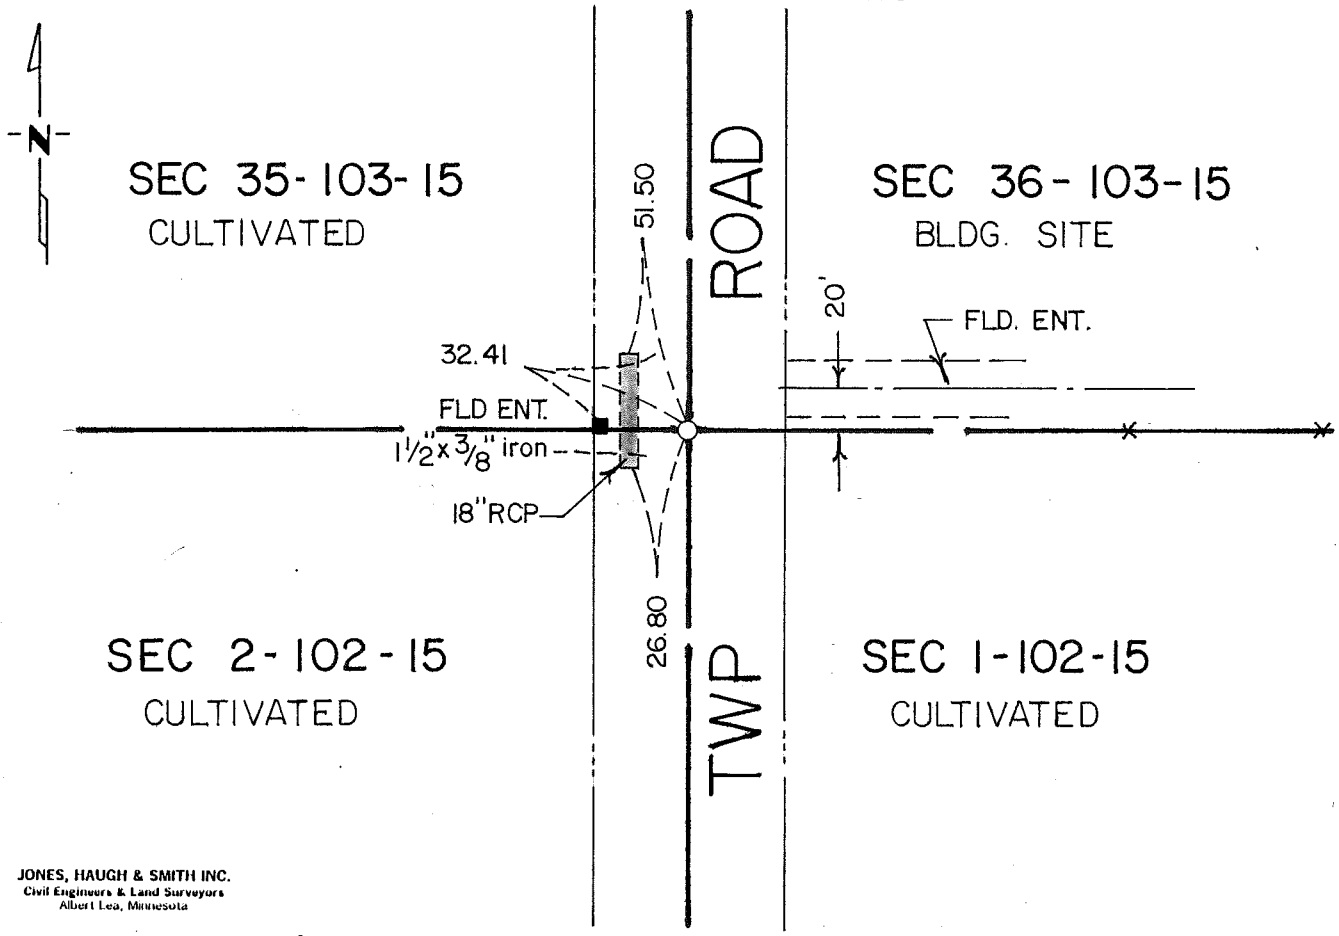

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

_____ SIGNATURE 4-27-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 36-103-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Recorder's Office
Mower County Highway Department

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1892 Clausen, Mower County Surveyor, uncovered a stone monument while subdividing the N 1/2 Sec 35.

1946 C.E. Milner, RLS 1476, uncovered a stone monument and the following ties were taken:
32.5' west to iron
45.9' east to 18" Cottonwood
49.1' southeast clump 6' willows
54.7' northeast CFP

1992 Jones, Haugh & Smith Inc crew under the direction of John Schulte, dug with the County backhoe and uncovered a capped pipe on road surface. Continued digging and uncovered a clay brick over a 6"x19" pointed field stone 19" deep. Placed a capped 5/8" diameter iron under stone and set a 5/8" diameter iron capped RLS 13807 over stone on road surface. The capped pipe found on road surface was 0.56 feet north of true corner.

The monument found agrees with past records and fits occupation and road centerlines within the section.