Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 3, Township 102 Range 15, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-31-02 (DATE) found a concrete monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-31-02 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

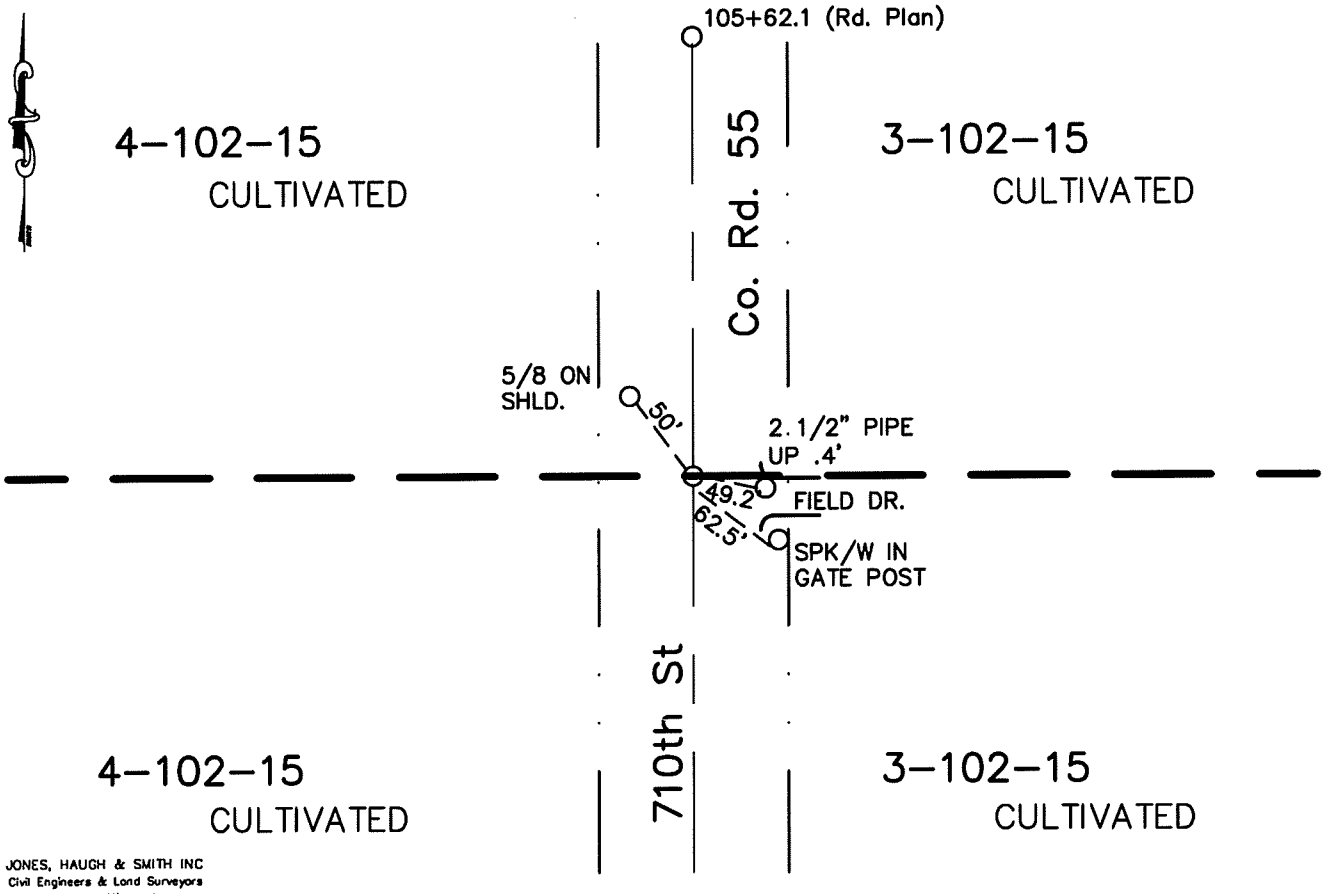

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W 1/4 Cor Sec 3-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1958 Mower County records show concrete monument inplace and a ¾" iron 50' East.

2002 Jones Haugh and Smith crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at a distance of 2617.6' (from county road plan) from northeast corner and found a 1 ½" iron. Continued digging and uncovered a concrete monument 4' deep. The 1 ½" iron was 1' South and 1' East of concrete monument. Placed a capped 5/8" X 16" iron with cast iron monument over concrete monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 3, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/13/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/13/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

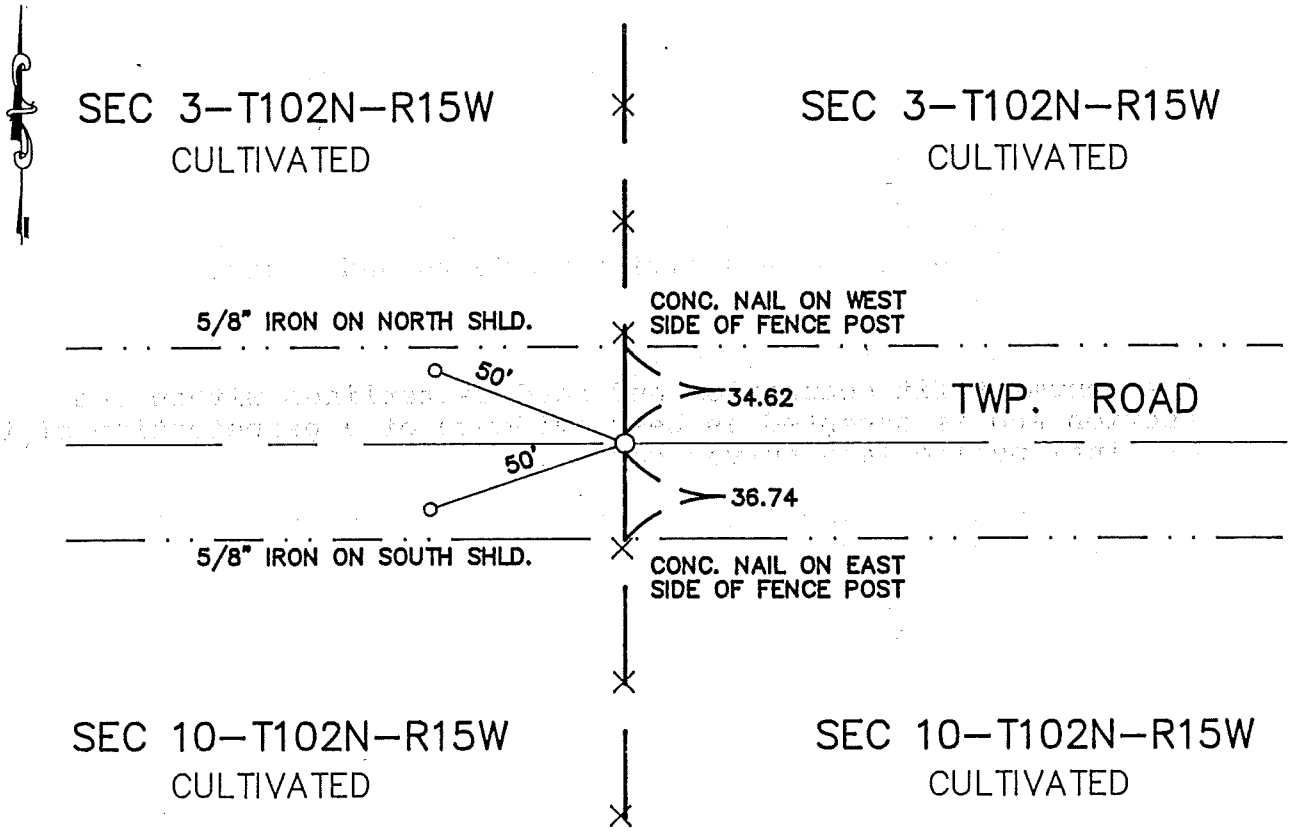

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-26-96

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 p .M. on the 29 day of Jan A.D., 1996

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 112202

M.H.D. FORM NO. 2105 BOOK 90 PAGE 109

Book 90 Misc Page 109

S 1/4 Cor SEC 3-102-15

This corner was originally established by Deputy Surveyor John Parker of the U.S. General Land Office in 1853. The government notes show a wood post was set.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1994 · Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of road E-W and in line with line fence N-S. Dug to virgin soil and found no evidence of corner. Set CIM on CL E-W twp. road, in line with fence lines north and south and accepted this location as best evidence of a perpetuation of the PLS corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 3, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 09/13/1994 (DATE) found a –

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 09/13/1994 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

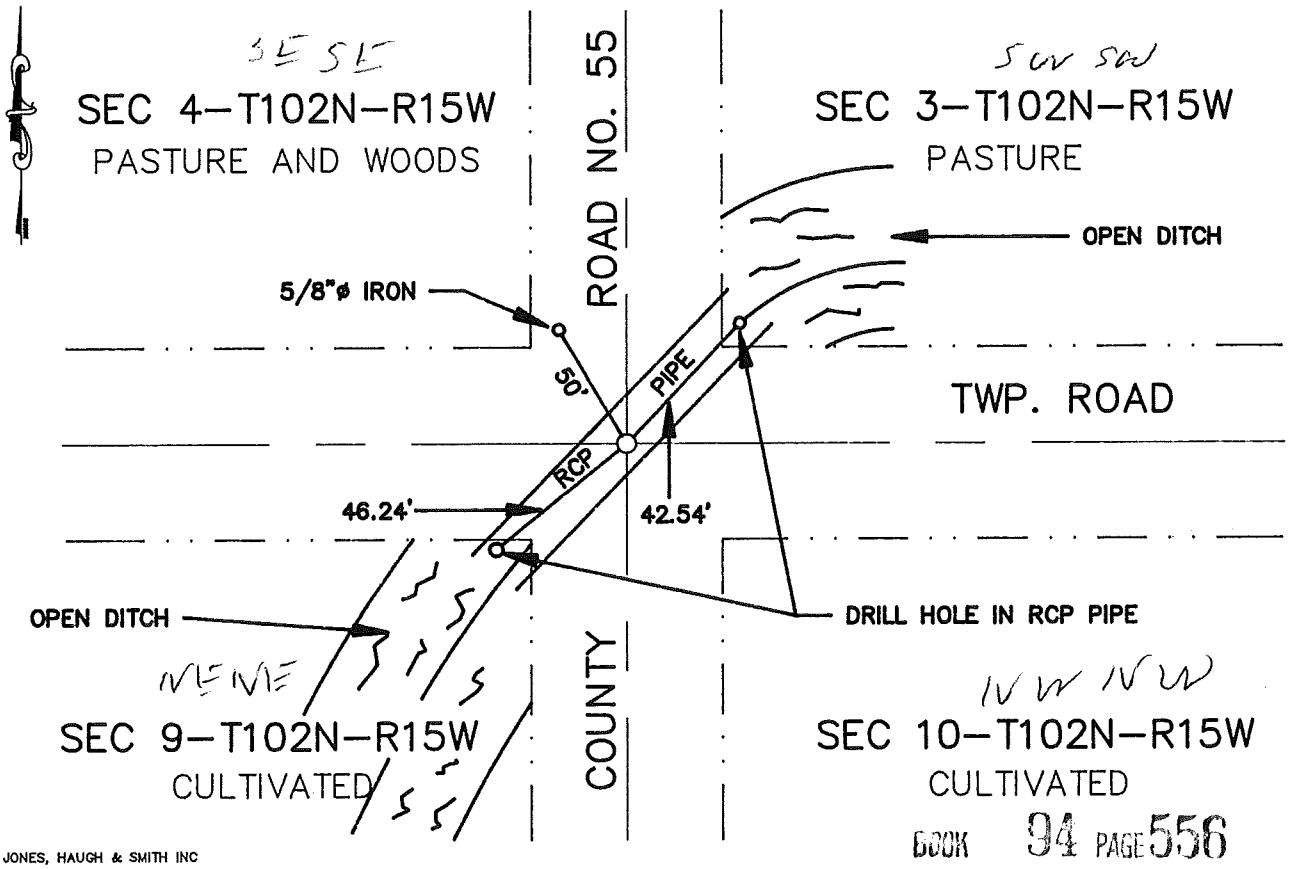

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 556

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-7-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 8 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452217

M.H.D. FORM NO. 2105

Book 94 Misc Page 556

SW Cor SEC 3-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

Mower County records show a concrete monument in place.

1994 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, used CL intersection information shown on County Road #55 and #9 road plats and place a cast iron monument and took ties.

The monument fits occupation and/or road centerlines within the section and/or recorded plats and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 4, Township 102 Range 15, ____ P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 7-31-02 (DATE) found a Concrete Monument

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 7-31-02 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

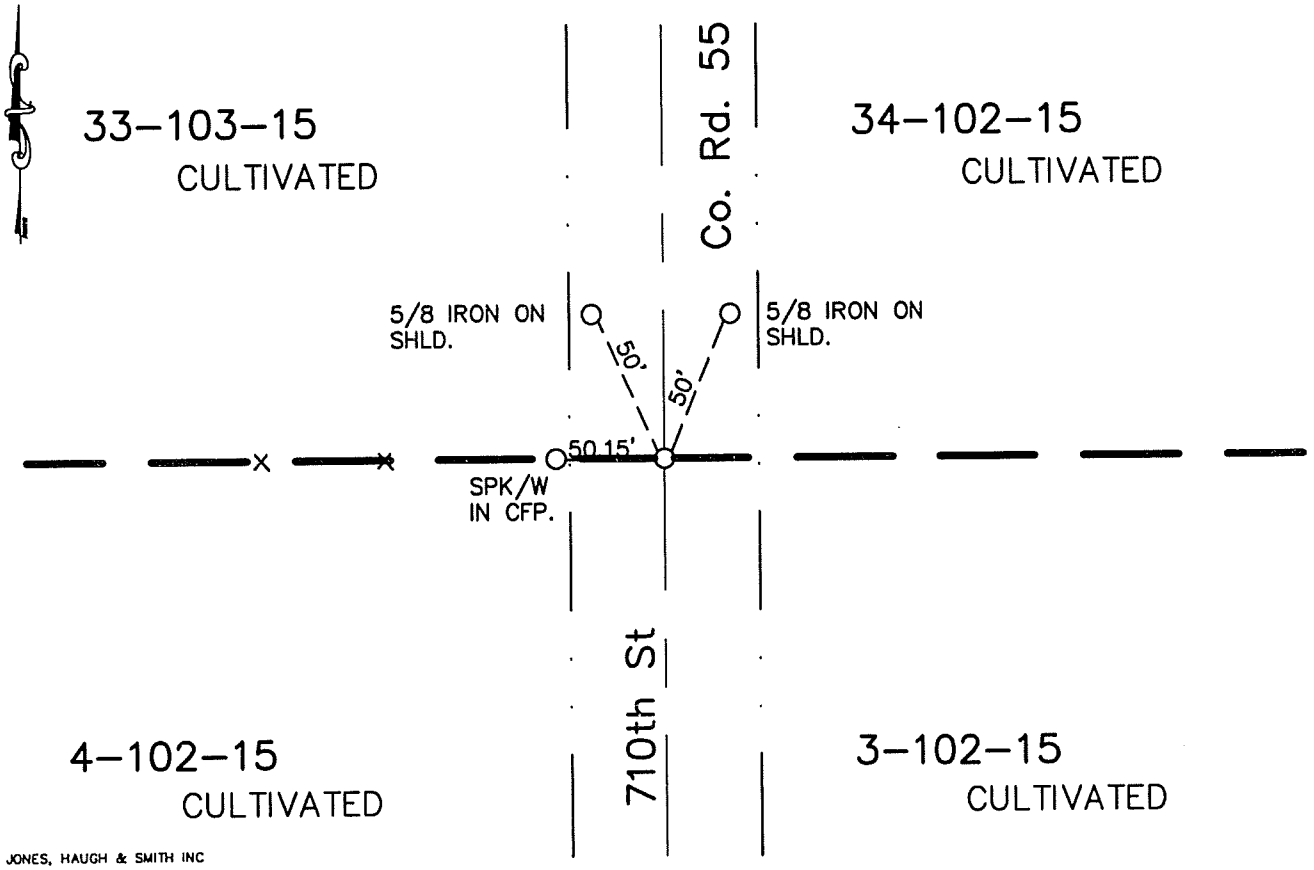

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-8-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 4-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1958 Mower County records show concrete monument inplace and a 3/4" iron 50' East of the monument.

2002 Jones Haugh and Smith crew, under the direction of John Schulte, Mower County Surveyor RLS 13807, dug with backhoe at location of signal from magnetic locator. Uncovered concrete monument with pin in the center. Placed a capped 13807 5/8" iron on North side of monument 1.3' deep. Set 5/8" iron with cast iron monument .6' below road surface, over the found monument. Took new ties. The crew was unable to locate ¾" iron 50' East of concrete monument.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 4, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/25/2004 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On – (DATE) placed a –

SKETCH OF REFERENCE TIES

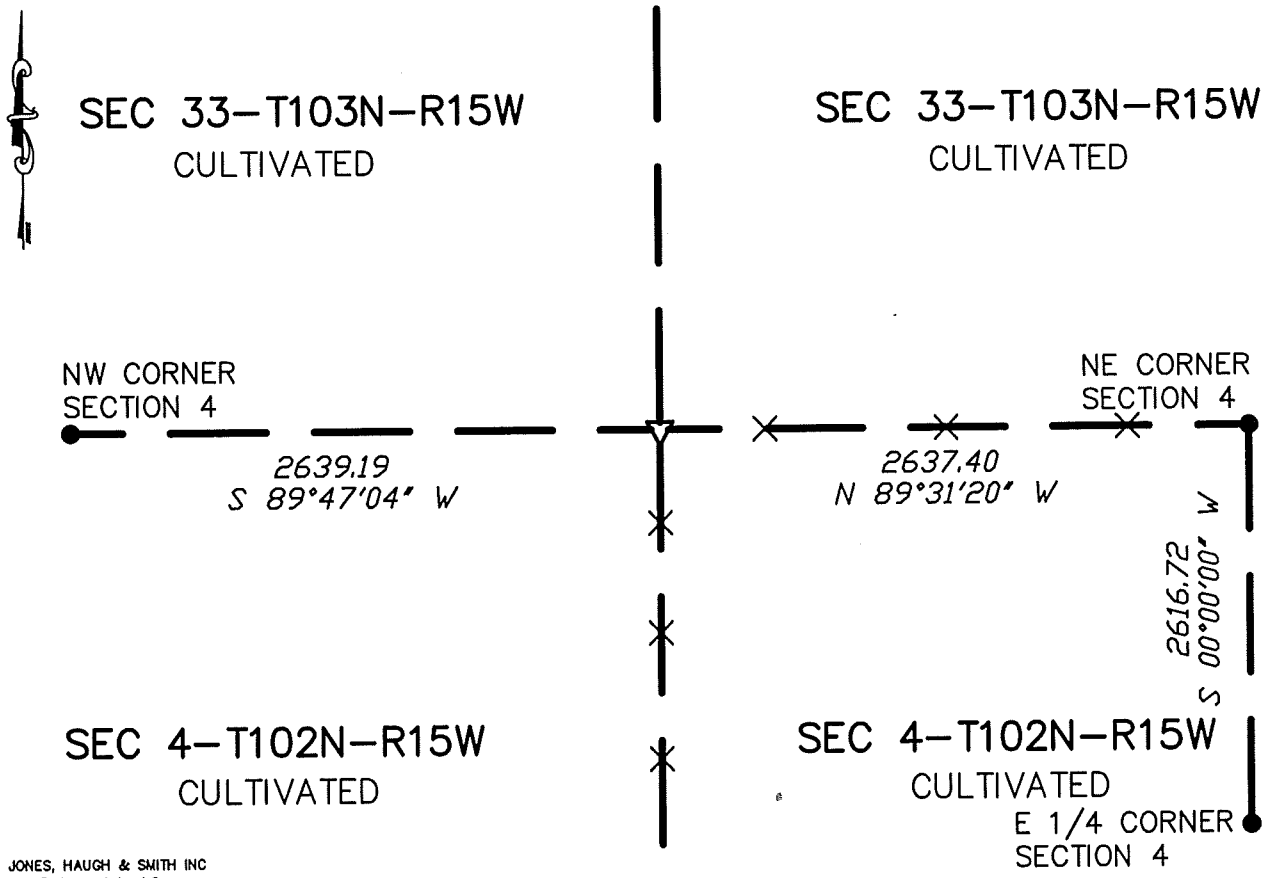

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-6-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N 1/4 Corner Section 4-T102N-R15W

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located a corner fence post at the intersection of fence lines south and east. Corner is 4' +/- north of a straight line between the Northeast Corner of Section 4 and the Northwest Corner of Section 5.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 4, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 00/00/1992 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 03/25/2004 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

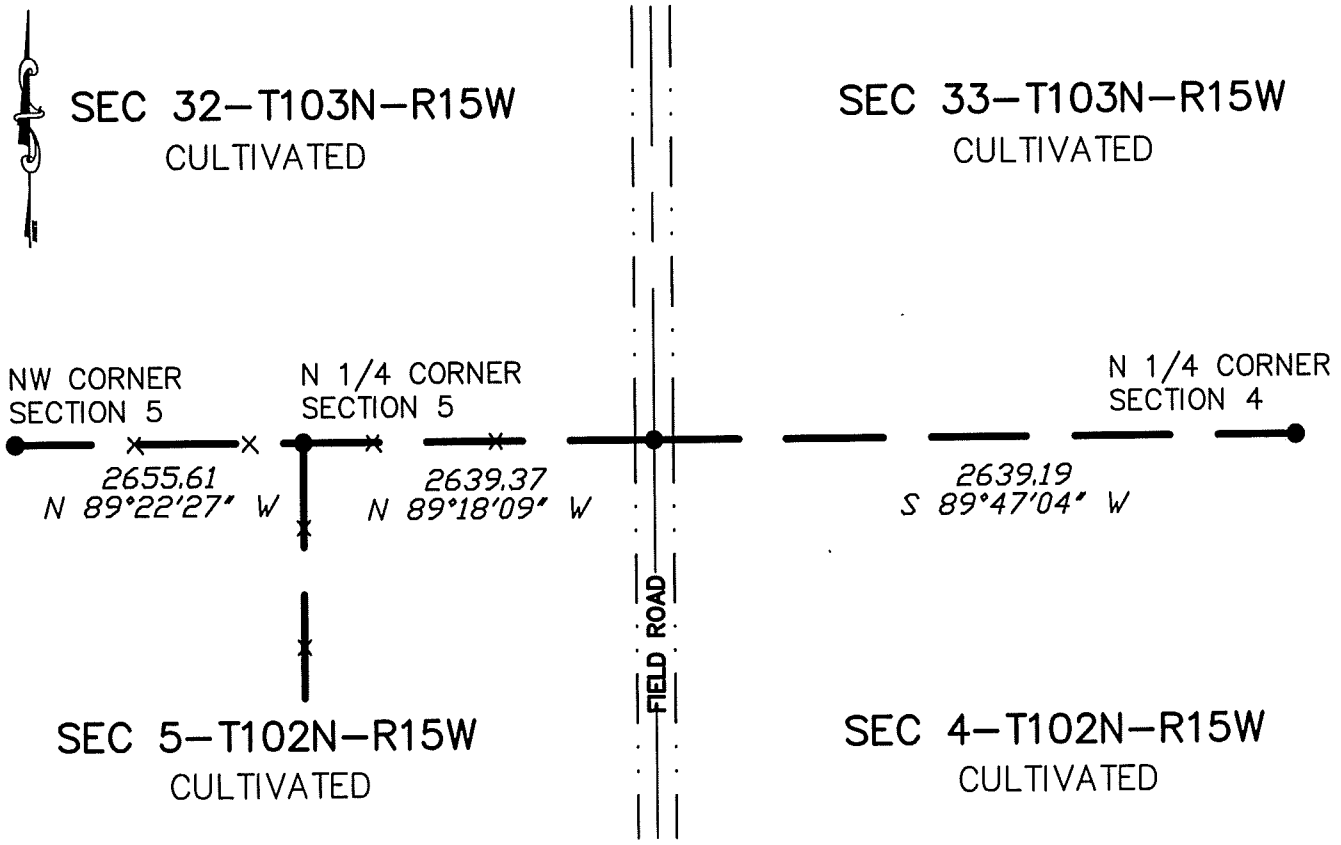

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 4-T102N-R15W

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug a large hole at the intersection of fence line west and the centerline of field road south. Found no evidence of the original PLS corner. Accepted said intersections as best evidence of the original PLS location. Placed a cast iron monument at this location. Corner is 24' +/- south of a straight line between the Northwest Corner of Section 5and the Northeast Corner of Section 4.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 5, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 3/25/2004 (DATE) found a 1/2" REBAR CAPPED 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1986 (DATE) placed a 1/2" REBAR CAPPED 15471

SKETCH OF REFERENCE TIES

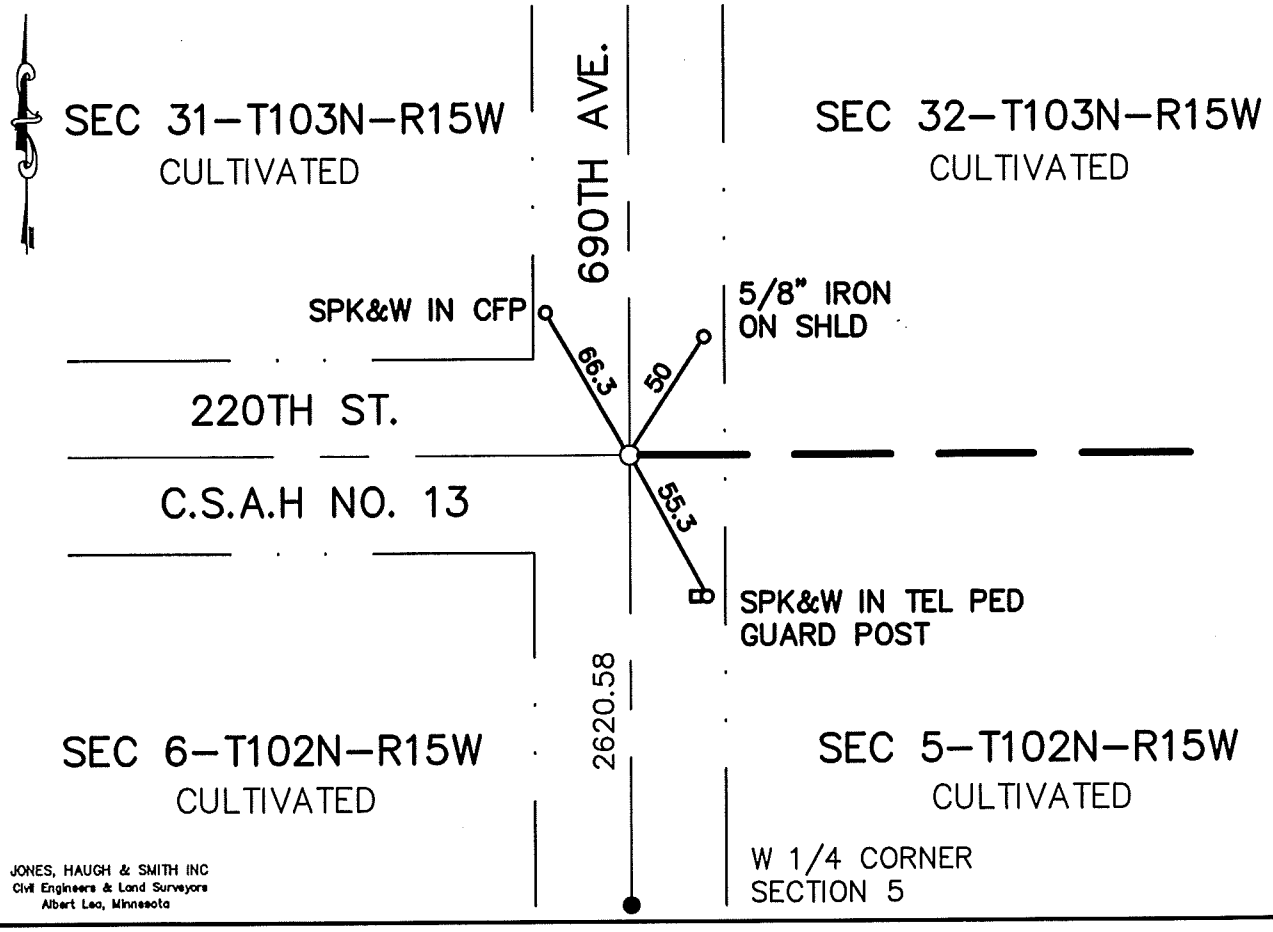

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Corner Section 5-T102N-R15W

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1986 Tucker Land Surveying dug at this location an uncovered a concrete monument in agreement with Mower County Highway Department records. He then placed a rebar and cap,#15471, above monument found.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at said location and located a ½" rebar 0.60' below road surface. Corner is in agreement with 1986 record by Tucker Land Surveying.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 5, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/25/2004 (DATE) found a CORNER FENCE POST

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a NOTHING

SKETCH OF REFERENCE TIES

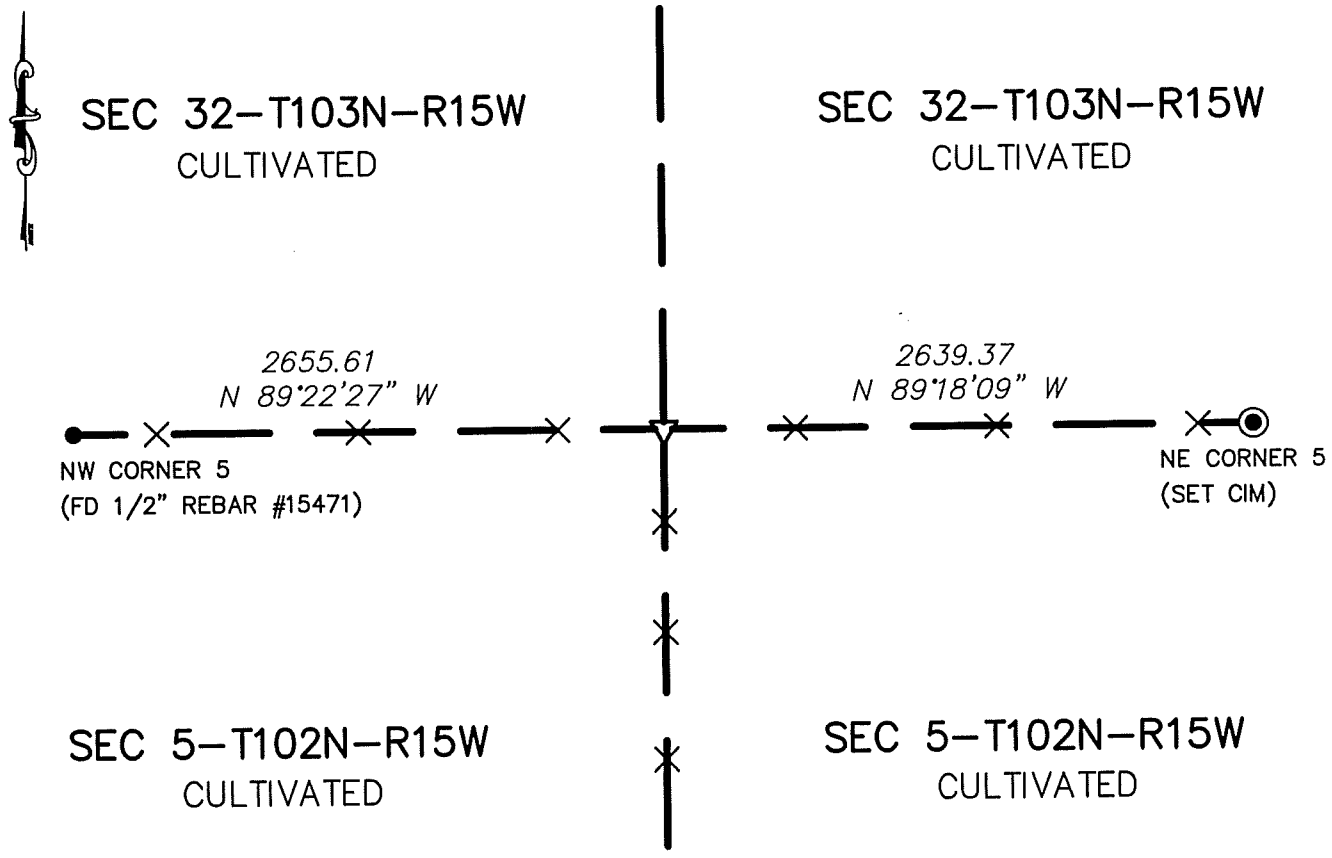

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 5-6-04 (DATE)

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N ¼ Corner Section 5-T102N-R15W

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, found a corner fence post at the intersection of fence lines east, west, and south. Fence post is the best evidence of the original PLS corner location. Corner is 10' +/- south of a straight line between the Northwest Corner of Section 5 and the Northeast Corner of Section 4.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 5, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 03/25/2004 (DATE) found a 1/2" REBAR CAPPED 15471

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 1986 (DATE) placed a 1/2" REBAR CAPPED 15471

SKETCH OF REFERENCE TIES

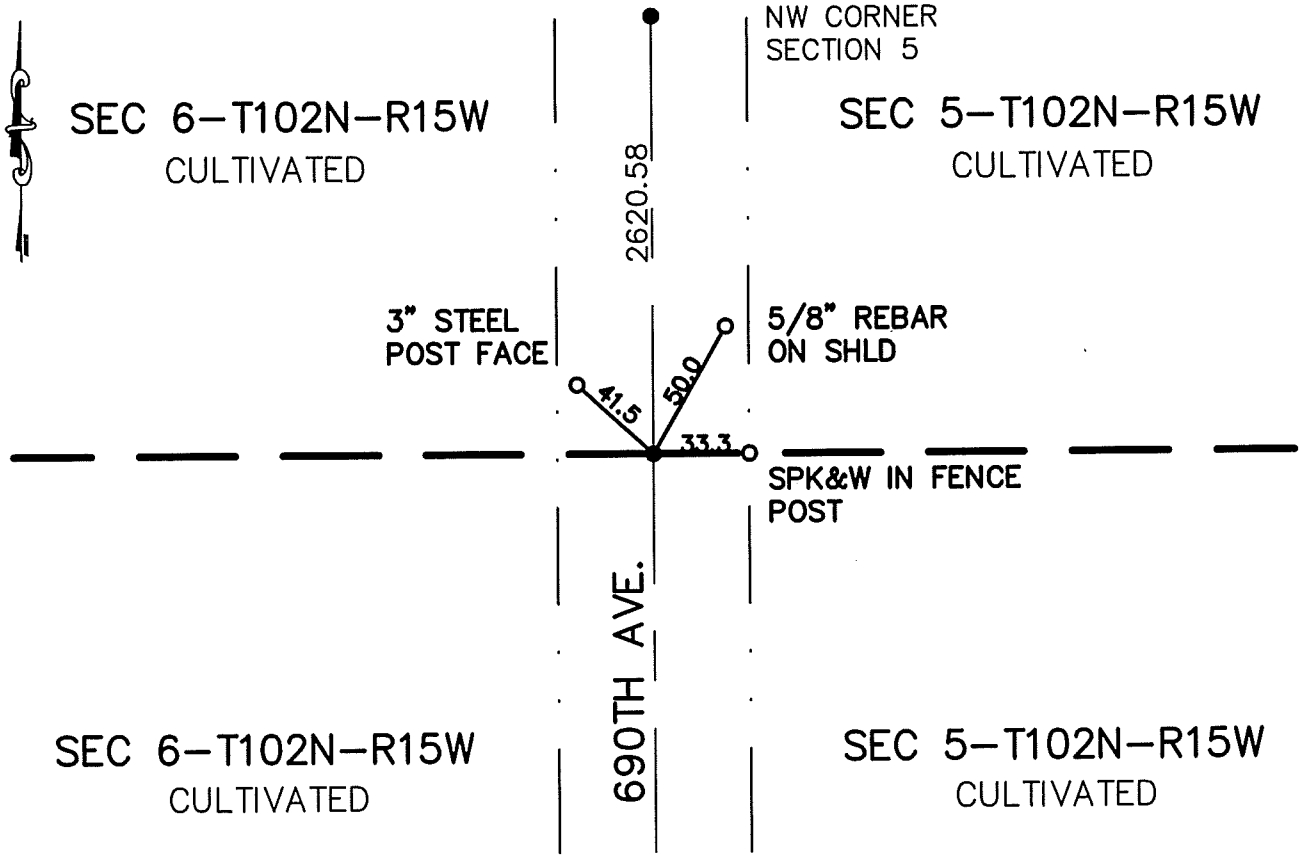

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-6-04

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

W ¼ Corner Section 5-T102N-R15W

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1986 Tucker Land Surveying dug at this location an uncovered a 1" iron shaft and set rebar and cap above found monument.

2004 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at said location and located a ½" rebar 0.60' below road surface. Corner is in agreement with 1986 record by Tucker Land Surveying and is best evidence of corner location.

The monument is in agreement with the record and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 7, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/02/2002 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

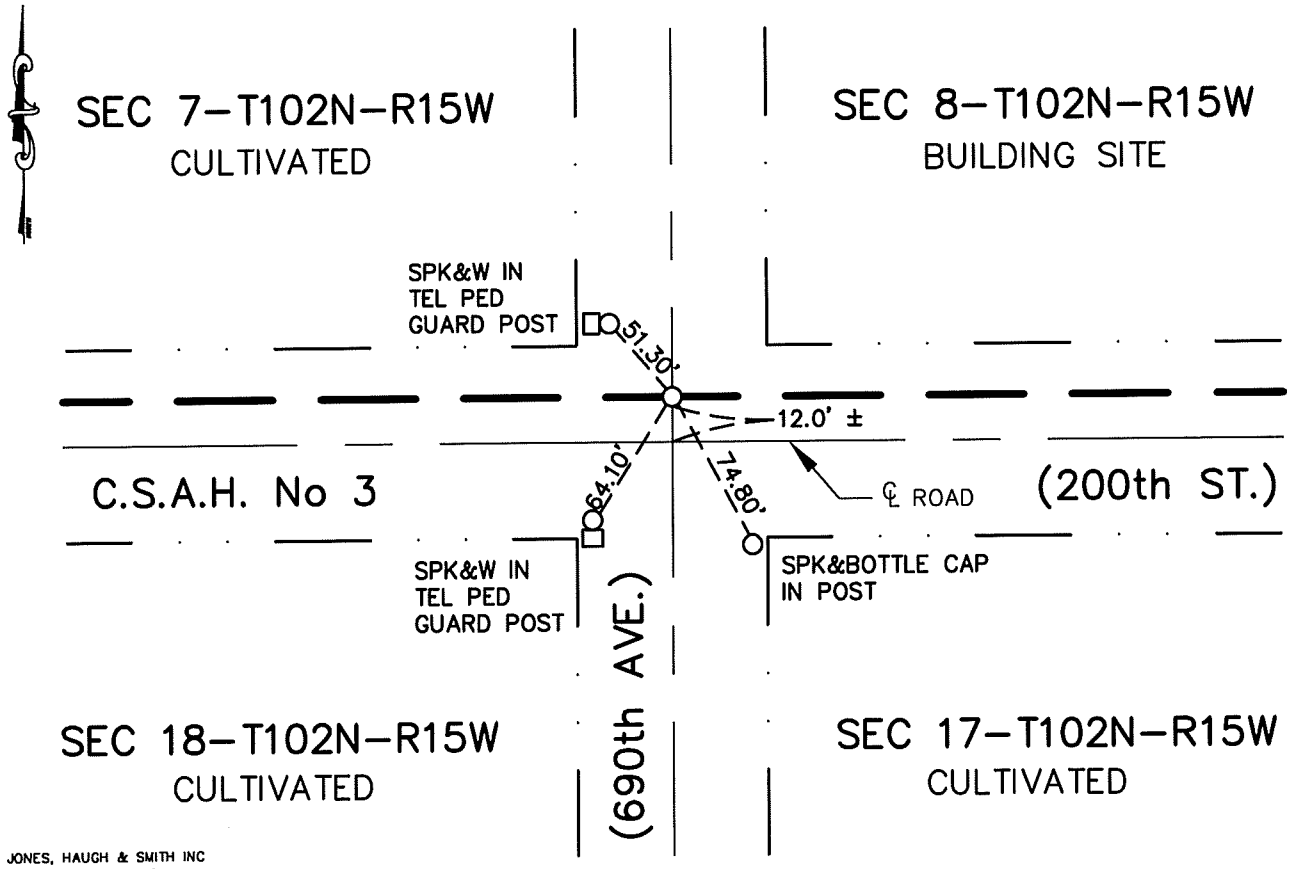

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 7-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1925 Mower County Highway Dept. road plan shows a corner and ties at this location.

1969 Mower County Highway Dept. road plan shows a concrete monument inplace at this location.

1970 Mower County records show a magnetic monument inplace at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe at location of signal from magnetic locator and found a CIM 1.0' below road surface. The corner is 12' +/- north of the road centerline. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 7, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/07/2002 (DATE) found an ALUMINUM MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

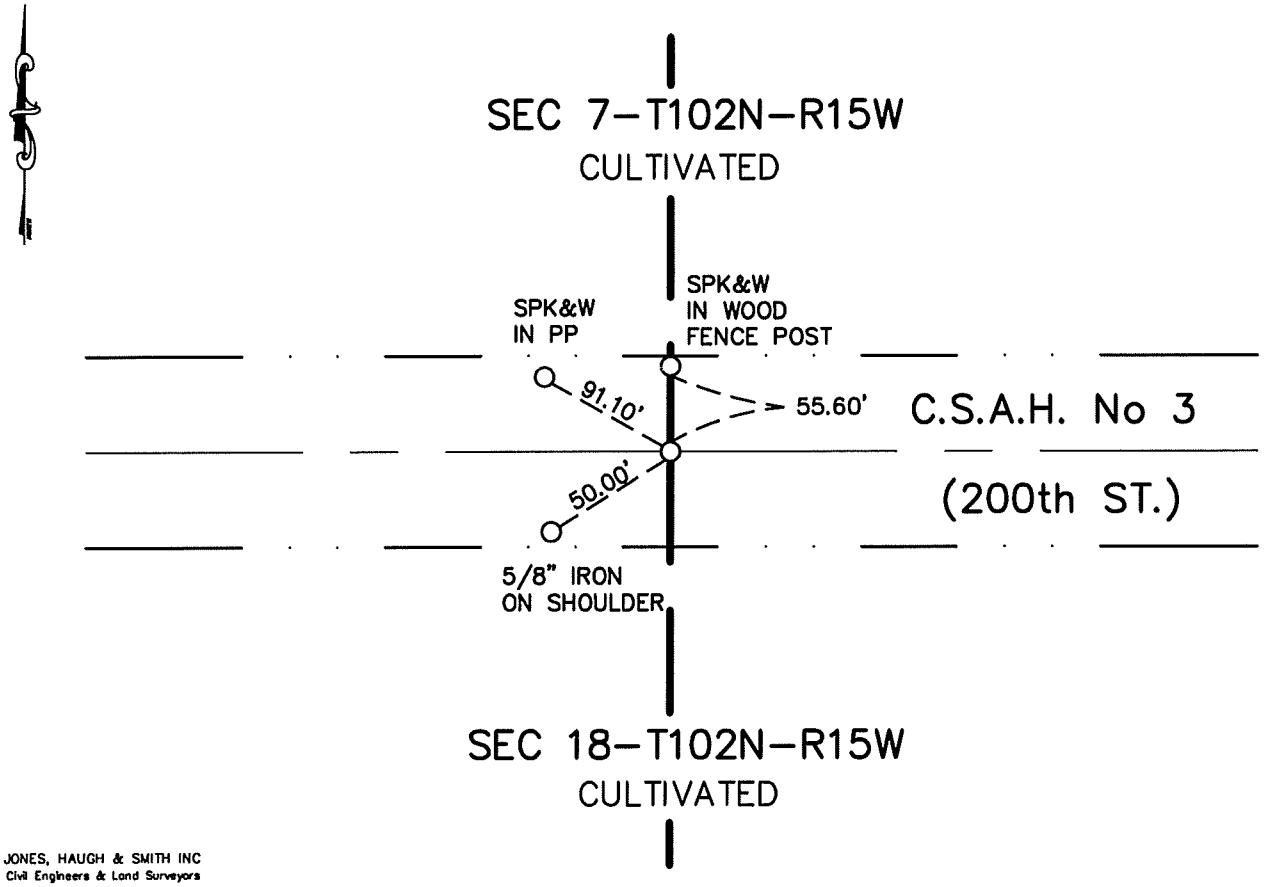

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S ¼ Cor Sec 7-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1969 Mower County Highway Dept. road plan shows a concrete monument inplace at this location.

1969 Mower County surveyor notes state an iron rod inplace at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found an aluminum monument. Monument fits the 1969 road plan location and is accepted as a perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 10, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a CONCRETE MONUMENT WITH 1/2" IRON IN CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

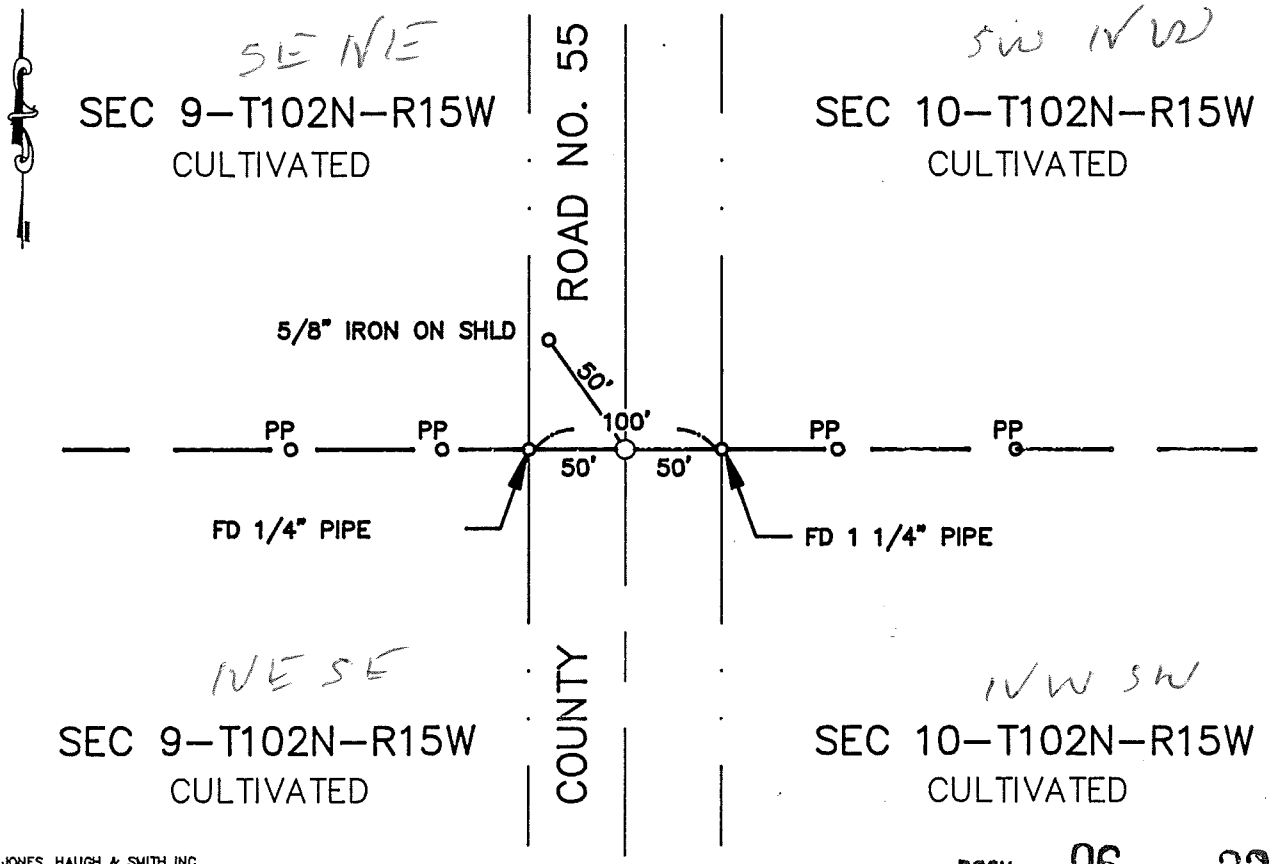

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 32

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 7-18-97 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 454989

M.H.D. FORM NO. 2105

Book 96 Misc Page 32

W 1/4 Cor SEC 10-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1958 Mower County records state inplace concrete monument.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, uncovered ties and found a 1 1/4" pipe on east and west side of centerline of road on R/W. Dug with Mower County backhoe on centerline of County Road No. 55, using ties. Uncovered concrete monument at 1.8' below road surface, with 1/2 " iron pin in center. Set 5/8" x 16" iron with cast iron monument over monument found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N 1/4 Corner of Section 13 ,Township 102N Range 15W , 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5/03/2002 (DATE) placed a CIM

SKETCH OF REFERENCE TIES

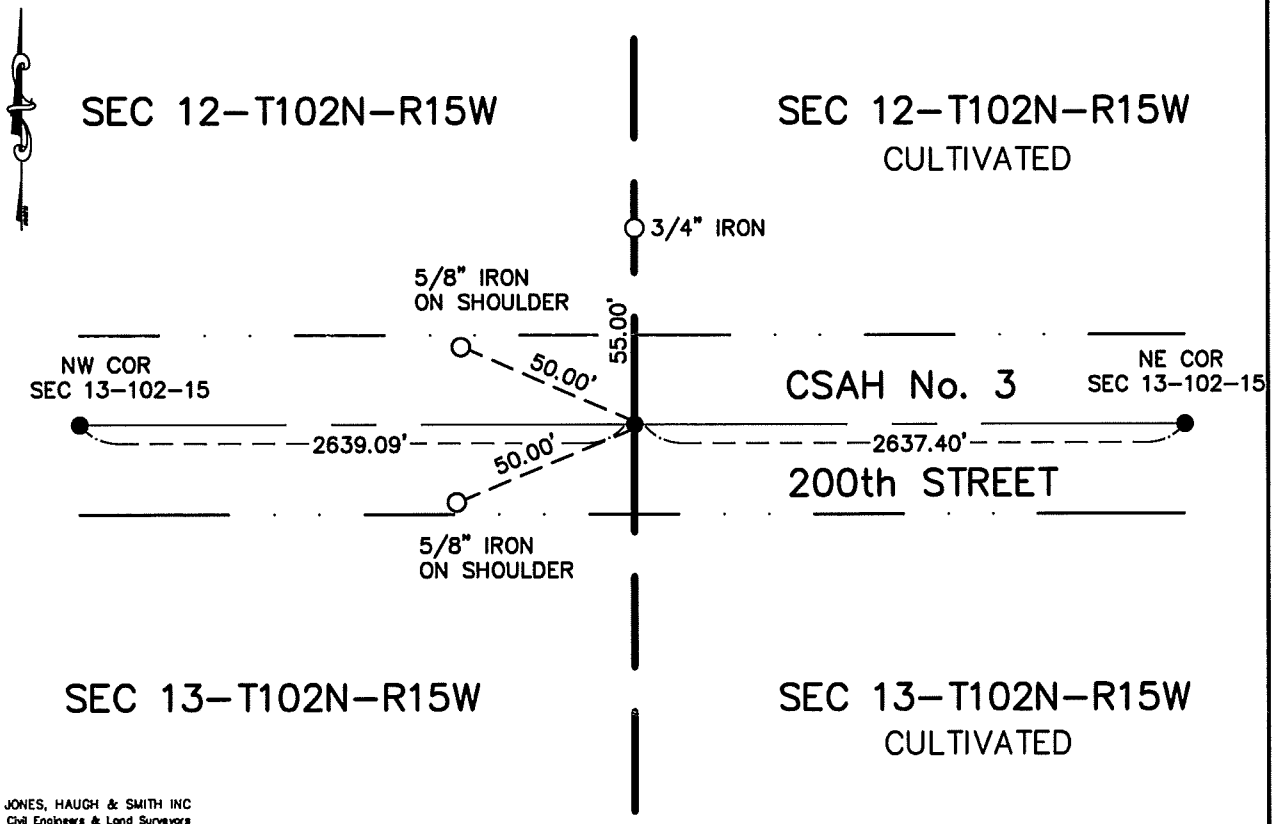

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 7-15-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____ , Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

N¼ Cor Sec 13-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County road plan shows inplace concrete monument and a ¾" iron 55.00 feet north and shows a distance from the northeast and northwest section corners.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with Mower County backhoe 55.00 feet south of ¾" iron and 2637.4 feet west of northwest corner of Section 13. Uncovered large rock 2.5'+/- below road surface which was in agreement with county tie to north and distance of 2637.40 feet west of the northeast corner. Set cast iron monument at this location.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 13, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/07/2002 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

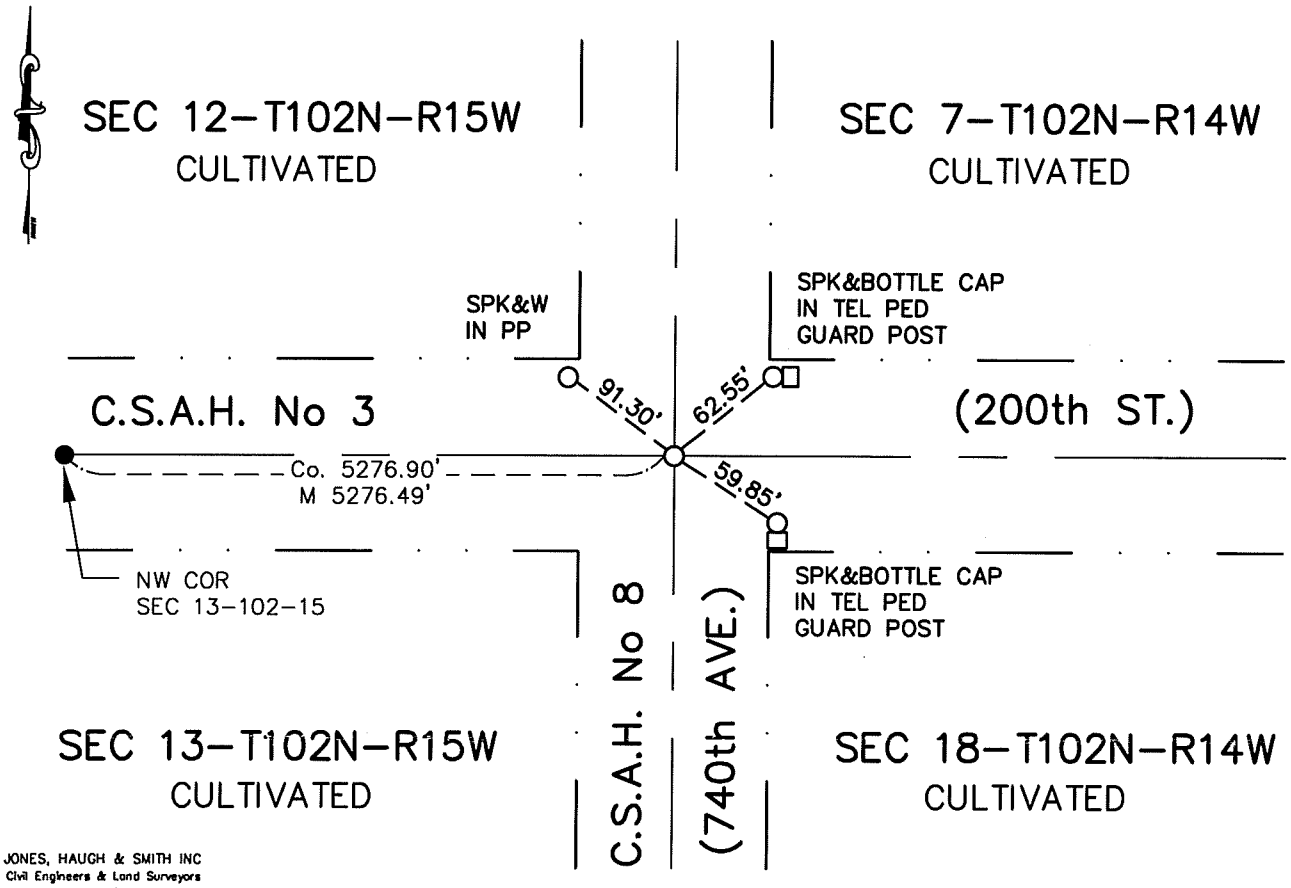

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

5-28-02
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NE Cor Sec 13-102-15

Deputy Surveyor John Ball of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1940 Mower County records state a concrete monument inplace at this location.

1946 Mower County Highway Dept. road plan for C.S.A.H. No 8 shows a concrete monument inplace at this location.

1947 Mower County Highway Dept. road plan for C.S.A.H. No 8 shows a concrete monument inplace at this location.

1969 Mower County Highway Dept. road plan for C.S.A.H. No 3 shows a distance of 5276.90' between the NW cor and the NE cor of sec 13-102-15. No monument was shown on the road plan.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found a CIM which fits Mower County Highway Dept. distance found on the 1969 road plan. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 13, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/03/2002 (DATE) found a CIM

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On _____ (DATE) placed a _____

SKETCH OF REFERENCE TIES

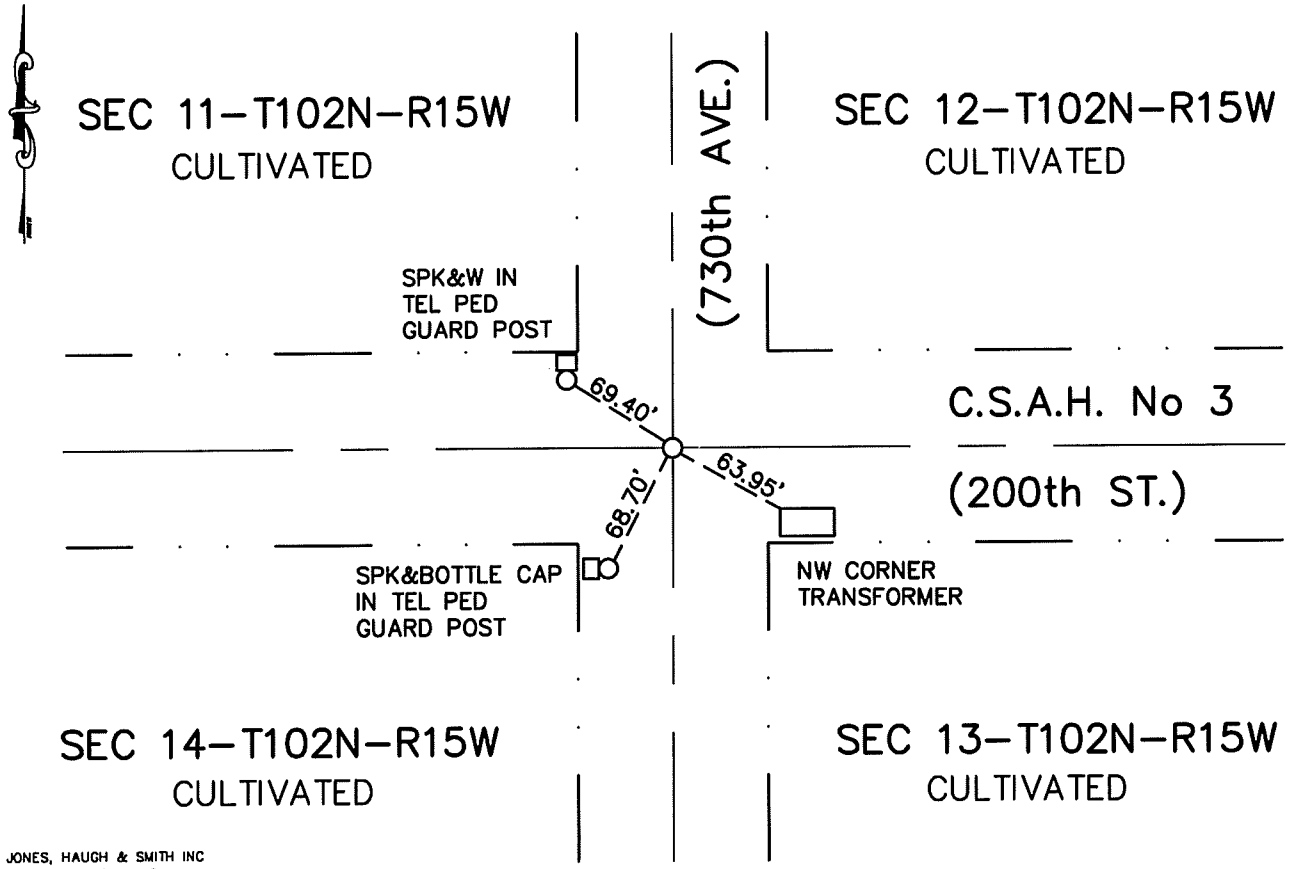

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-13-02

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 20___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

NW Cor Sec 13-102-15

Deputy Surveyor John Quigley of the U.S. General Land Office originally established this corner in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

1925 Mower County Highway Dept. road plan shows a corner and ties at this location.

1969 Mower County Highway Dept. road plan shows a concrete monument inplace at this location.

1970 Mower County records state a magnetic monument inplace at this location.

2002 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at location of signal from magnetic locator and found a CIM. Monument fits the 1969 road plan location and is accepted as a perpetuation of the original PLS corner. Took new ties.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 28, Township 102N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 11-21-91 (DATE) found a 6"x 10"x 15" long pointed field stone

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-21-91 (DATE) placed a cast iron monument over stone

SKETCH OF REFERENCE TIES

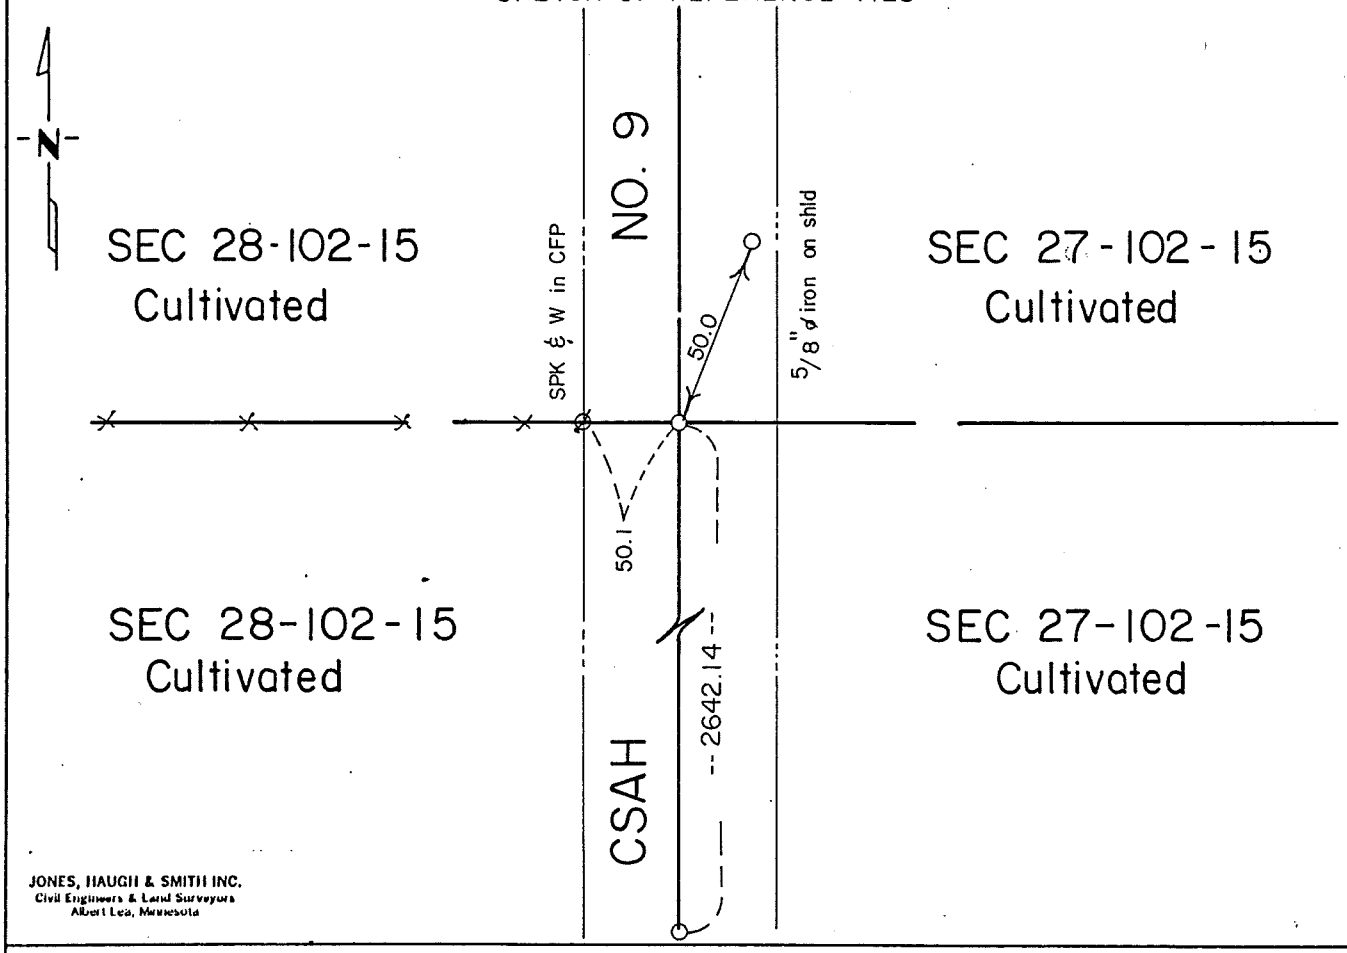

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-6-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E 1/4 corner Sec 28-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline of north-south road in line with fence west and uncovered a 6"x8"x15" pink pointed stone 3 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Set cast iron monument over stone on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 28, Township 102N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-21-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

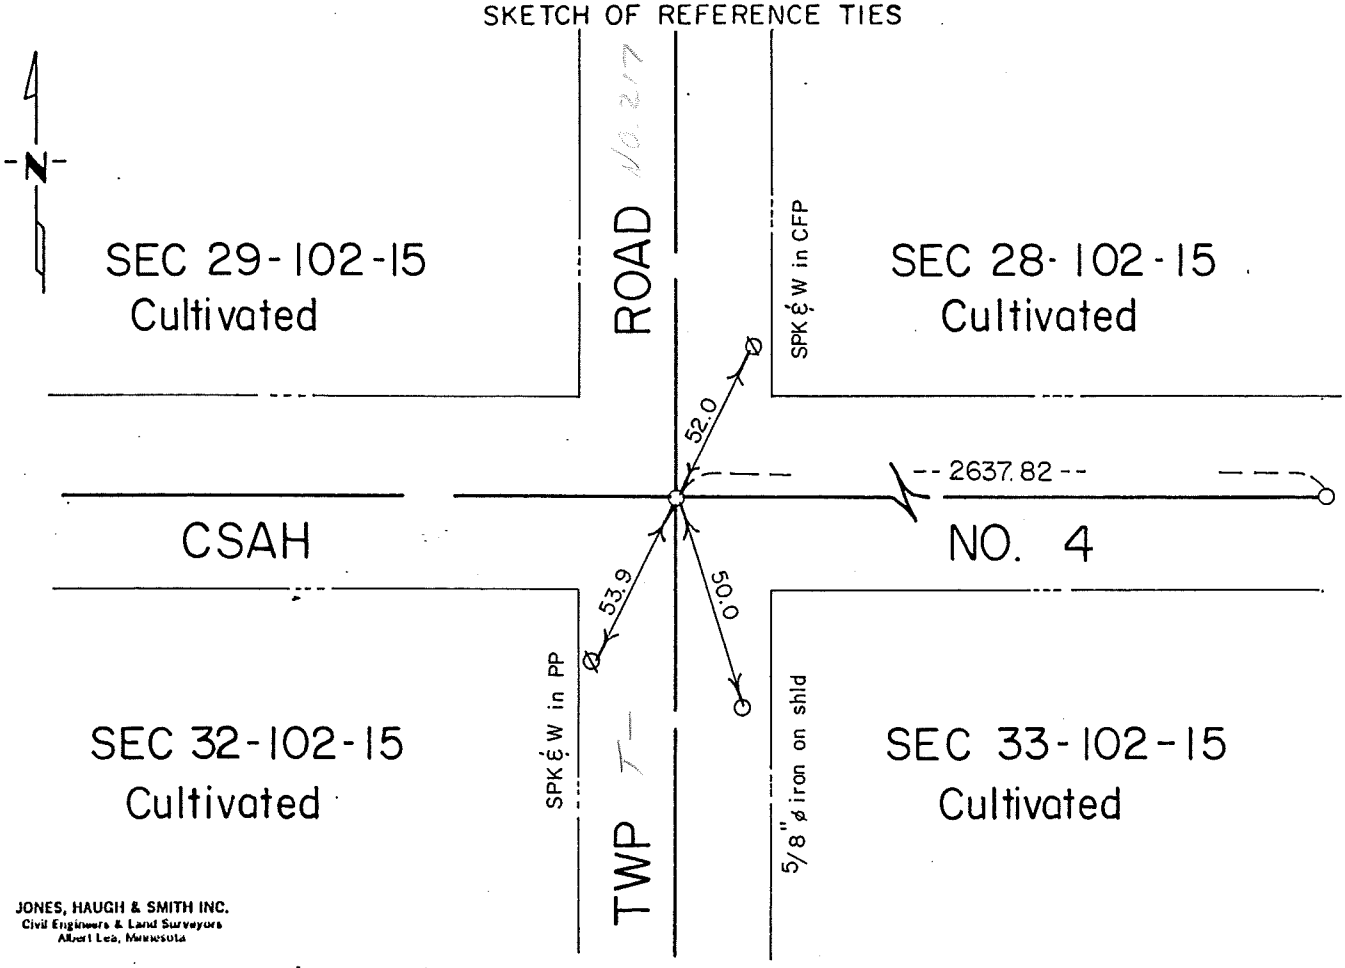

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] SIGNATURE 1-6-92 DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

SW corner Sec 28-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1930 Mower County Grading Plans shows a monument at section corner on centerline centerline of north-south-east-west roads at Sta 170+63. No ties were taken.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline centerline at a depth of 2 feet below road surface. Found 3" diameter rock inplace. Appears a heavy core cut was made at the location for reasons unknown. Continued digging and at a depth of 8 feet found clay material. The core cut would have destroyed any evidence or perpetuation of the original core. Therefore after consulting the Mower County Engineering Department on if road has been re-graded or moved since 1930 Grading Plan. Corner was reset at last known position on centerline centerline of existing road. A cast iron monument was set on road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 28, Township 102N Range 15W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On _____ (DATE) found a _____

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 11-21-91 (DATE) placed a cast iron monument

SKETCH OF REFERENCE TIES

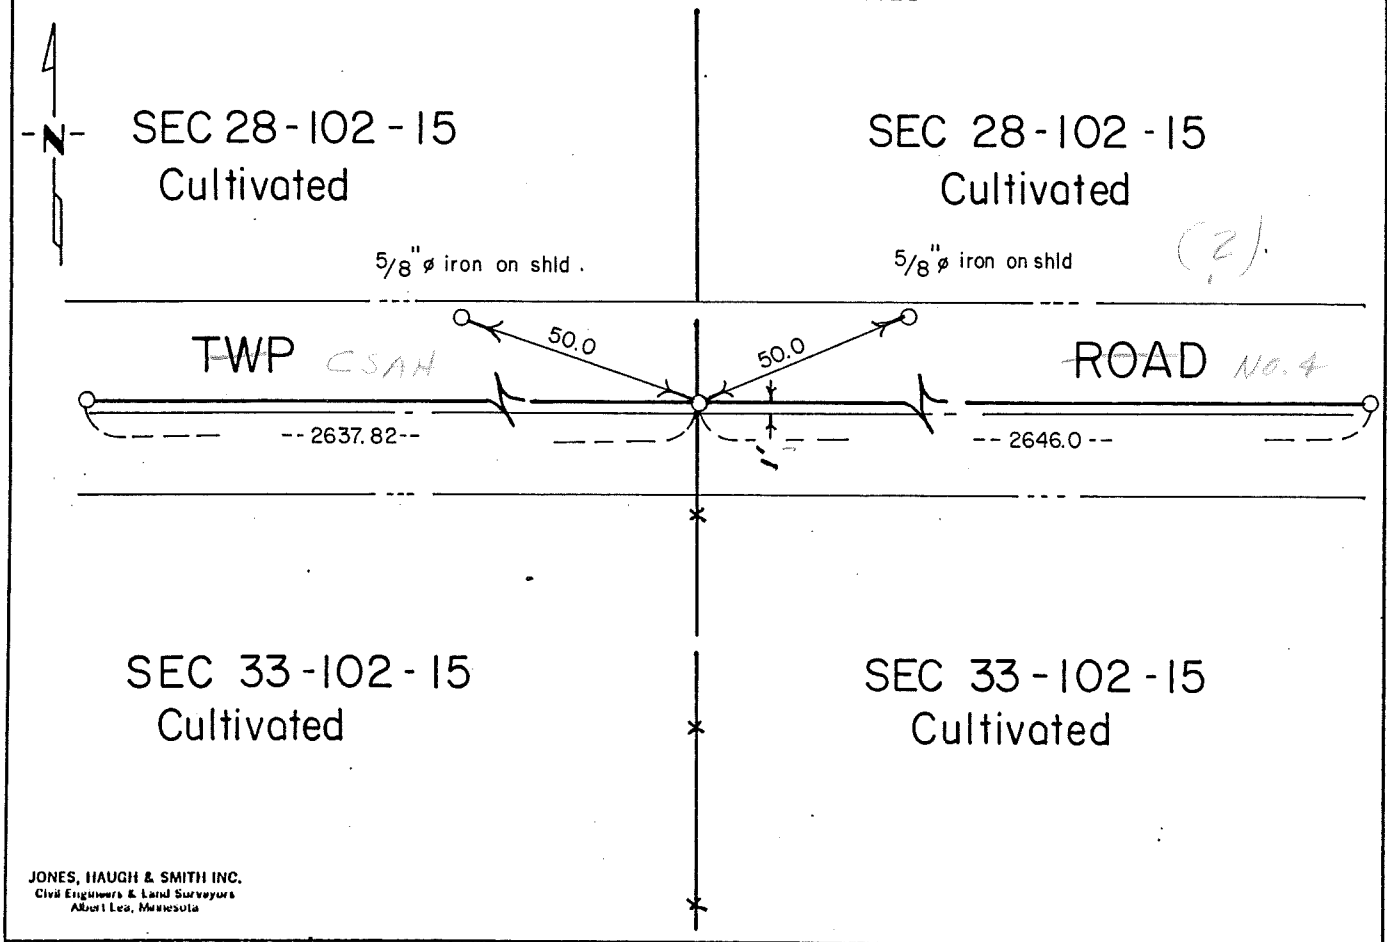

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 1-6-92

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

S 1/4 corner Sec 28-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith Inc crew under the direction of John Schulte IV, dug with the County backhoe on centerline of east-west road in line with fence south. Dug to a point that covers the midpoint between section corners and found no evidence of public land survey corner. Therefore accepted fence line south as best evidence and set cast iron monument on straight line between section corners.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "M" p106

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6/30/89 (DATE) found a 1 1/2" dia iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/30/89 (DATE) placed a 5/8" Ø x 16" iron capped RLS 13807.

SKETCH OF REFERENCE TIES

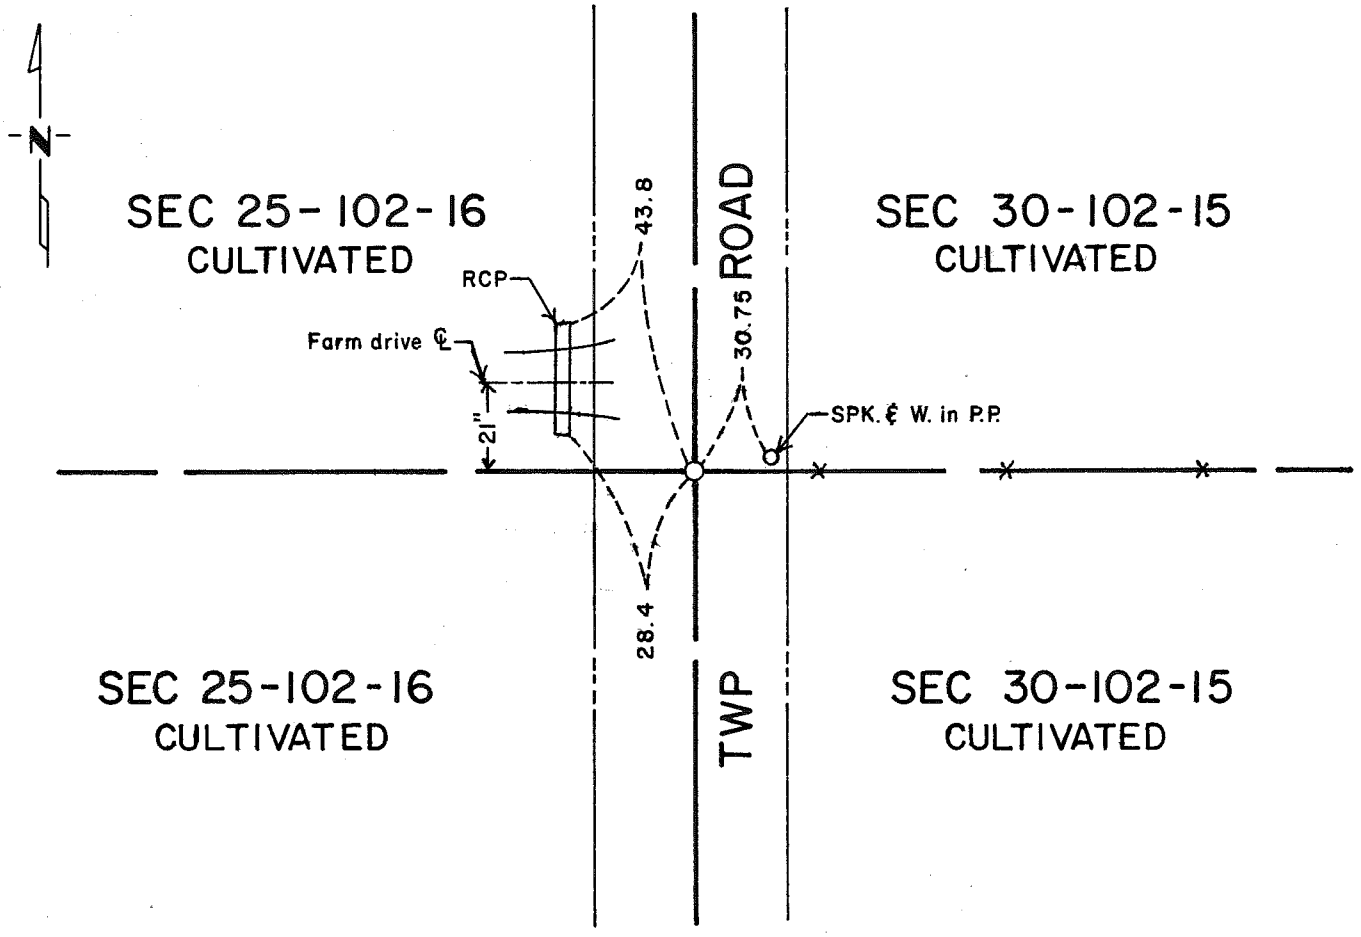

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-25-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W 1/4 corner Sec 30-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth with a trench and a hand full of small stones were deposited around post.

In 1989 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Engineering Department
Private records of Jones, Haugh & Smith Inc

No records of this corner were found to support evidence of a perpetuation of the original public land survey corner.

In June 1989 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe, dug on the centerline of north-south roads in line with fence east and uncovered a 1 1/2" diameter iron 3.5 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter x 16" iron on road surface.

The monument found fits occupation and road centerline and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. "L" p106

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 30, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6/30/89 (DATE) found a 2" dia. x 28" wood post.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/30/89 (DATE) placed a 5/8" dia iron capped RLS 13807 over post on road surface.

SKETCH OF REFERENCE TIES

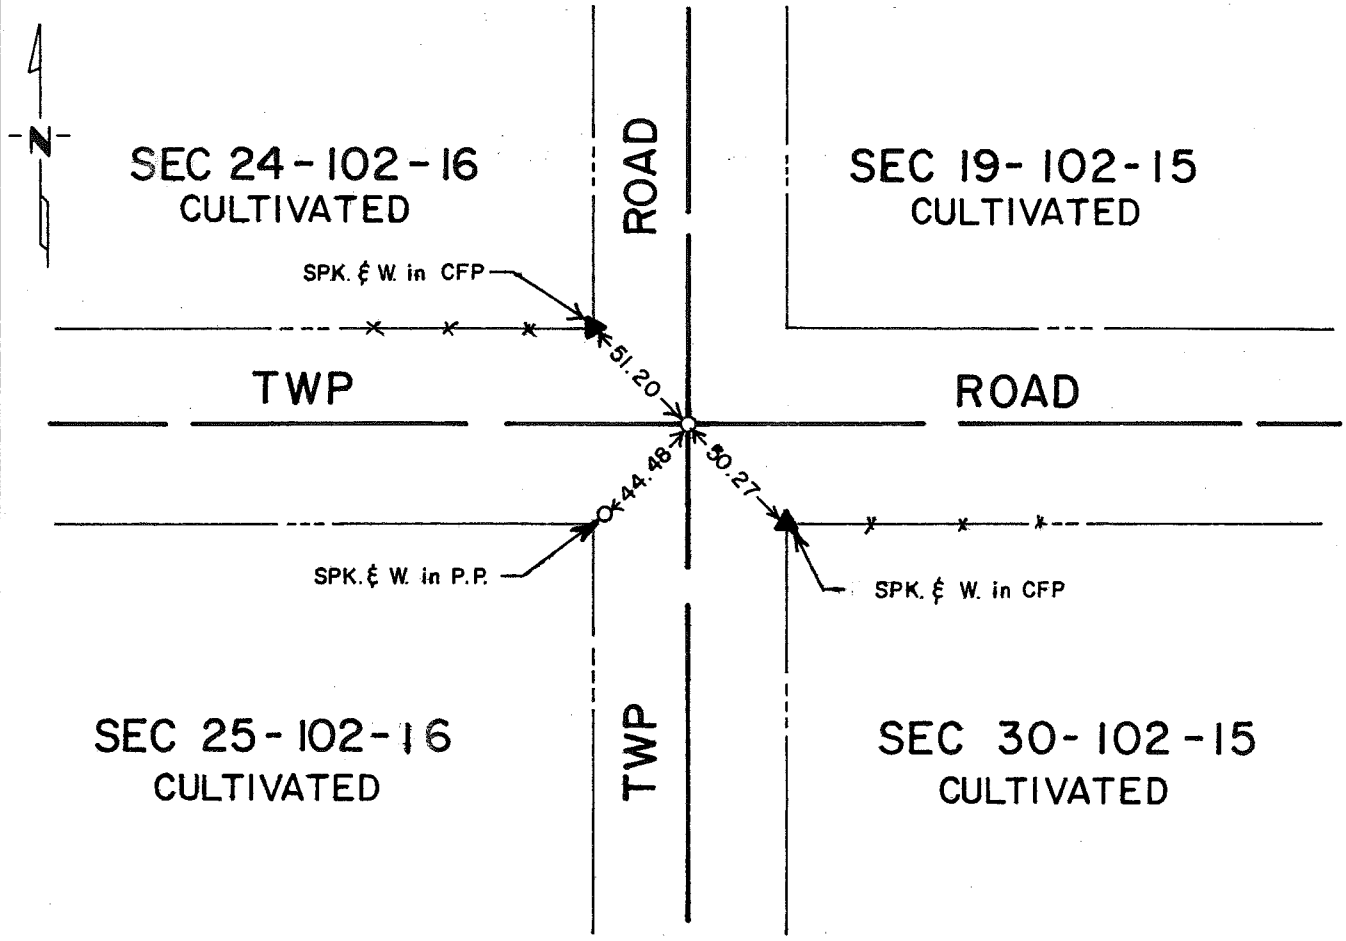

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE 7-25-89 DATE

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
NW corner Sec 30-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth with a trench.

In 1989 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Engineering Department
Private records of Jones, Haugh & Smith Inc

No records of this corner were found to support evidence of a perpetuation of the original public land survey corner.

In June 1989 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe, dug on the centerline centerline of north-south-east-west roads and at a depth of 2.5 feet below road surface in virgin soil uncovered a 2" diameter x 28" long charred wood post. Left post as found and placed a 5/8" diameter x 16" long iron over wood post on road surface.

The monument found fits occupation and centerlines within the section and is accepted as the original public land survey corner or a perpetuation thereof.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 30, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/09/99 (DATE) found a LARGE ROCK

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/09/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

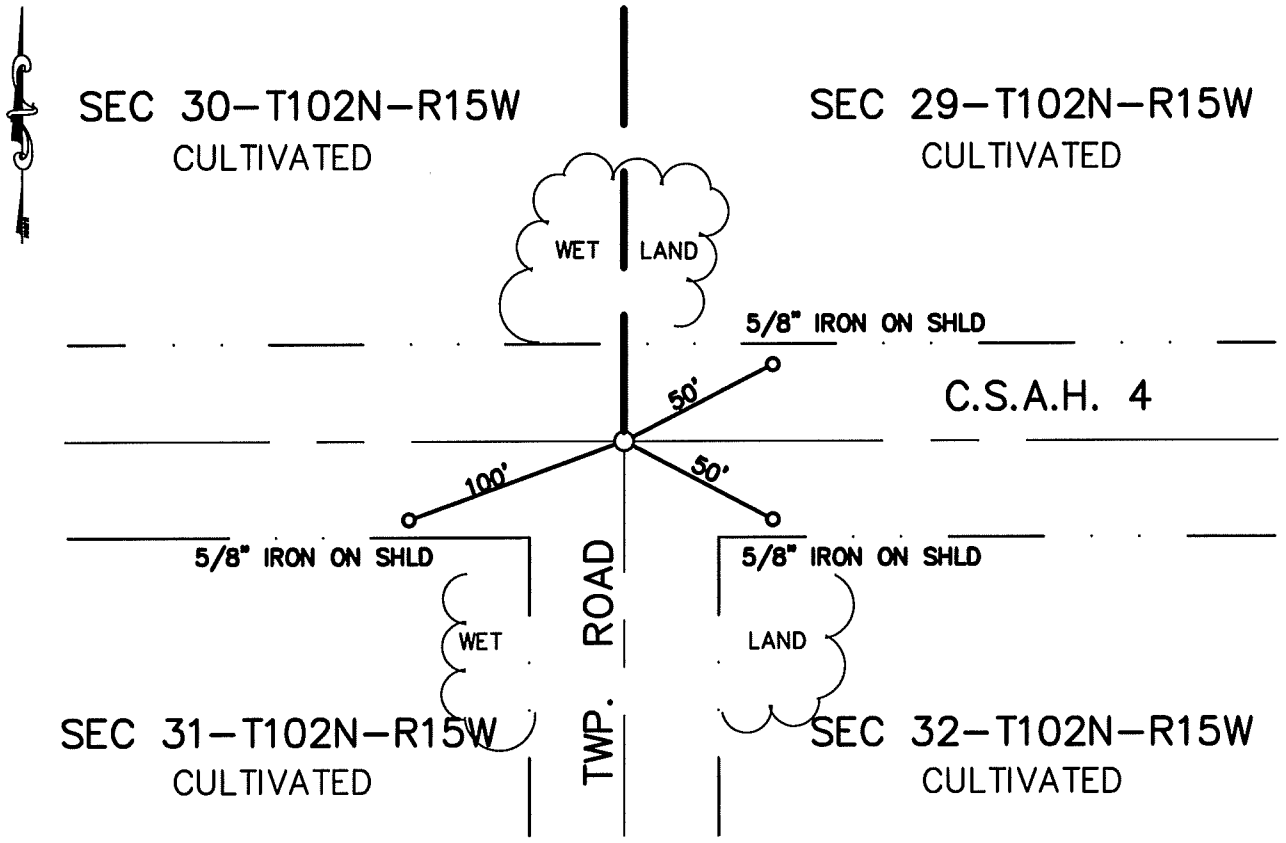

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ 8-10 99
SIGNATURE DATE

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

SE Cor Sec 30-102-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of C.S.A.H. No.4 and the centerline of township road south. Uncovered a large rock 3.5' deep. Continued digging and found no other evidence of the original PLS corner. Placed a capped 5/8" iron #13807 on the east side of rock found. Placed a cast iron monument above rock at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S 1/4 Corner of Section 30, Township 102N Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/09/99 (DATE) found a LARGE SPIKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/09/99 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

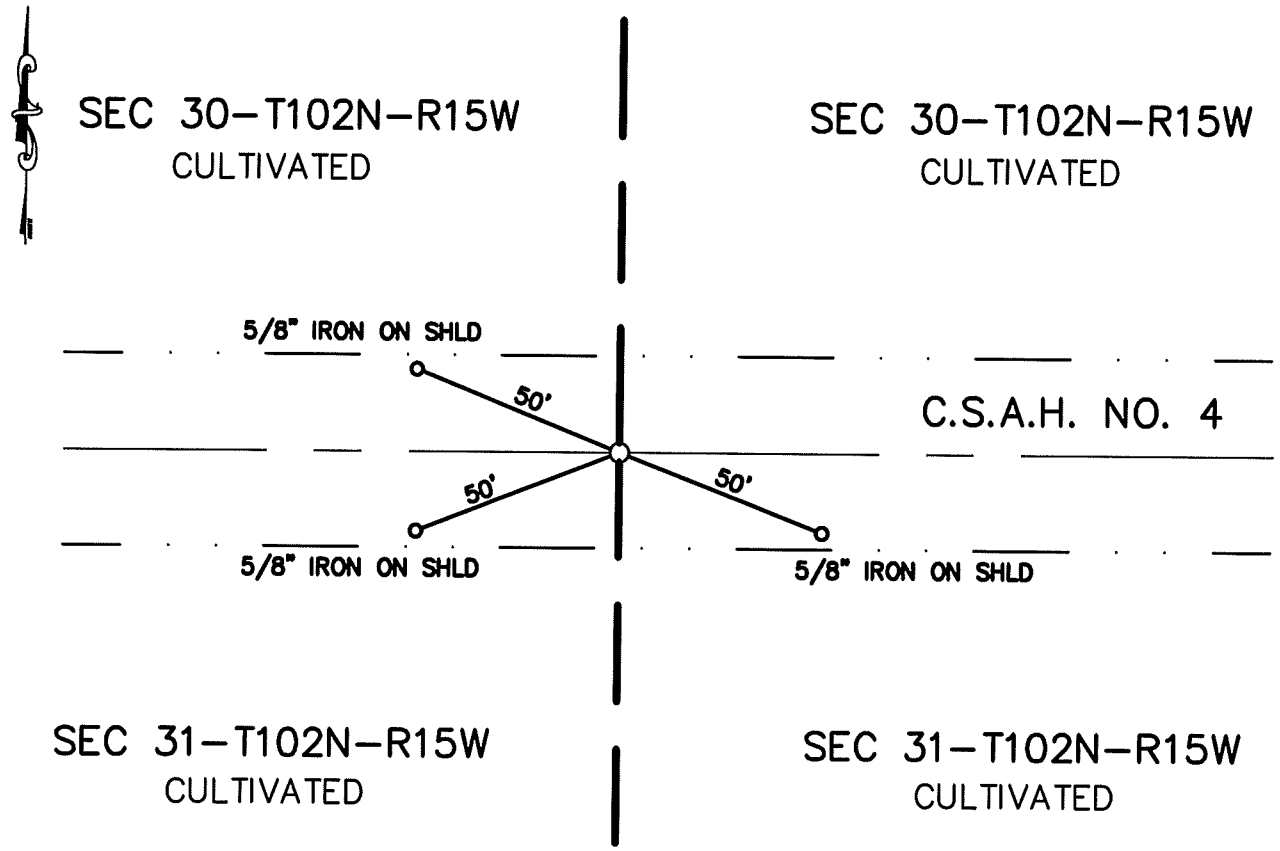

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

_____ (SIGNATURE) 8-10-99 (DATE)

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

S 1/4 Cor Sec 30-102-15

This corner was originally established by Deputy Surveyor Charles Phipps and Edward Fitzpatrick of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1999 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the centerline of C.S.A.H. No. 4 E-W and in line with line fence N-S. Located a large spike at road surface. Continued digging and found no other evidence of the original PLS corner. Placed a cast iron monument at road surface inplace of spike found.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh, and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 34, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-25-91 (DATE) found a harrison monument over a concrete monument w/1/2"Ø iron cast in center over 3 vertical stones on ℄ ℄ of N-S-E-W roads.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 4-25-91 (DATE) placed a cast iron monument over concrete monument found

SKETCH OF REFERENCE TIES

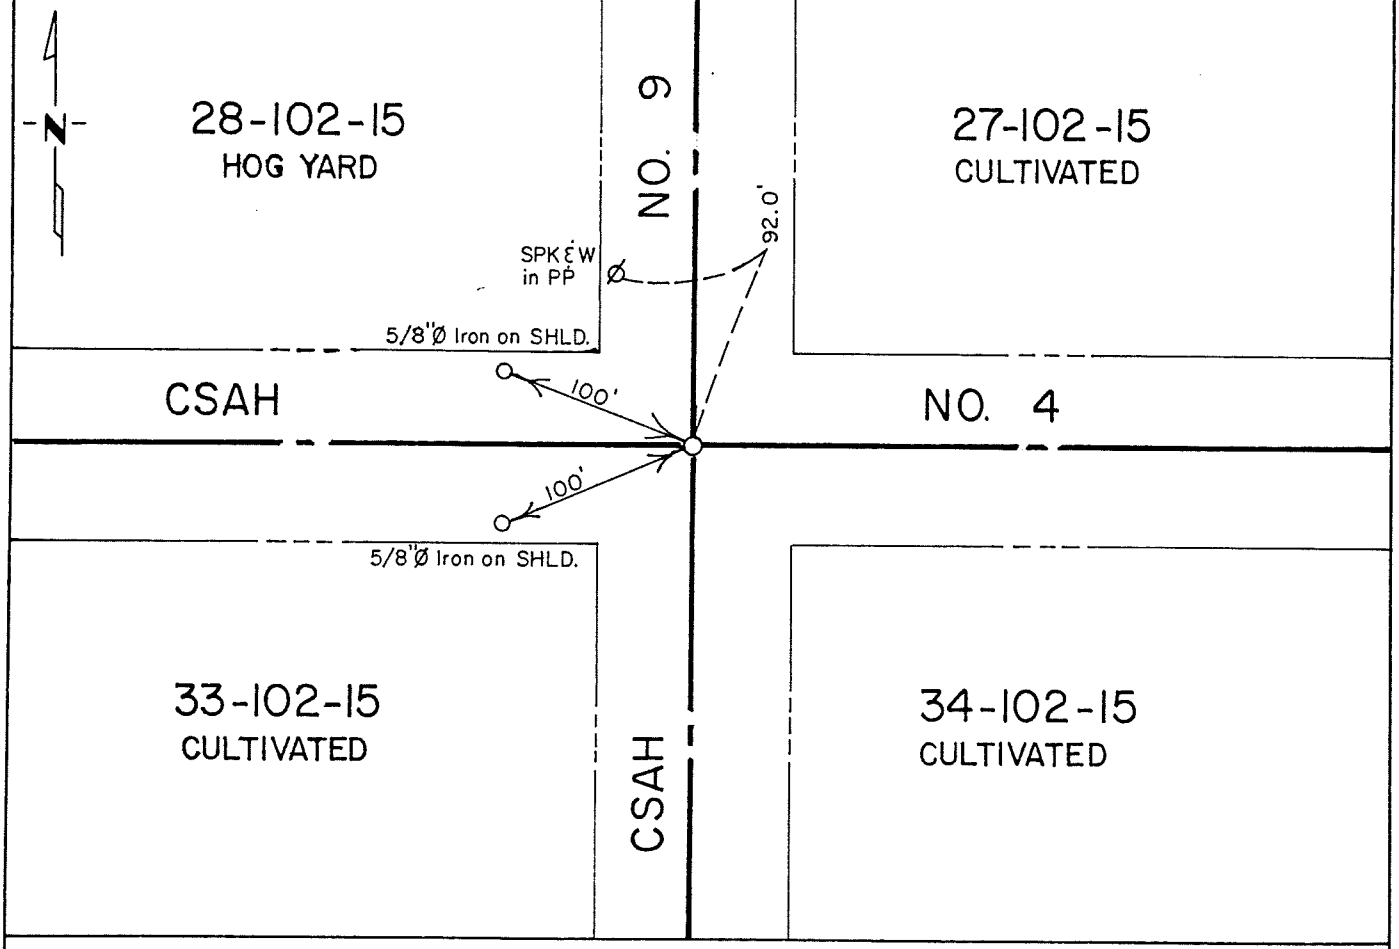

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-2-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Sec 34-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1940 Book "A" of the Mower County Engineer's Office shows inplace three rocks set vertical and ties were taken.

1953 Book "A" shows a concrete monument 3.0 feet below road surface and ties were taken.

1971 Book "A" shows corner found and the following ties were recorded:
91.3' NW to power pole
124.2' NE to tele pole
98.4' WNW to north end 18" RCP

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe dug on centerline centerline of north-south-east-west roads for County State Aid Highway No. 9 grading project SAP 50-609-07. Excavation uncovered a Harrison cast iron monument over a 1/2" diameter iron over a concrete monument with a 1/2" diameter cast in center. Monument agrees with 1946 grading plan. Concrete monument set over three vertical stones. Left monument as found and placed a cast iron monument over concrete monument.

The monument found is in agreement with the record and fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W1/4 Corner of Section 34, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☒ On 4-25-1991 (DATE) found NO EVIDENCE OF PLS CORNER.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☒ On 5-21-91 (DATE) placed a cast iron monument on ℄ road at midpoint between Sec. corners.

SKETCH OF REFERENCE TIES

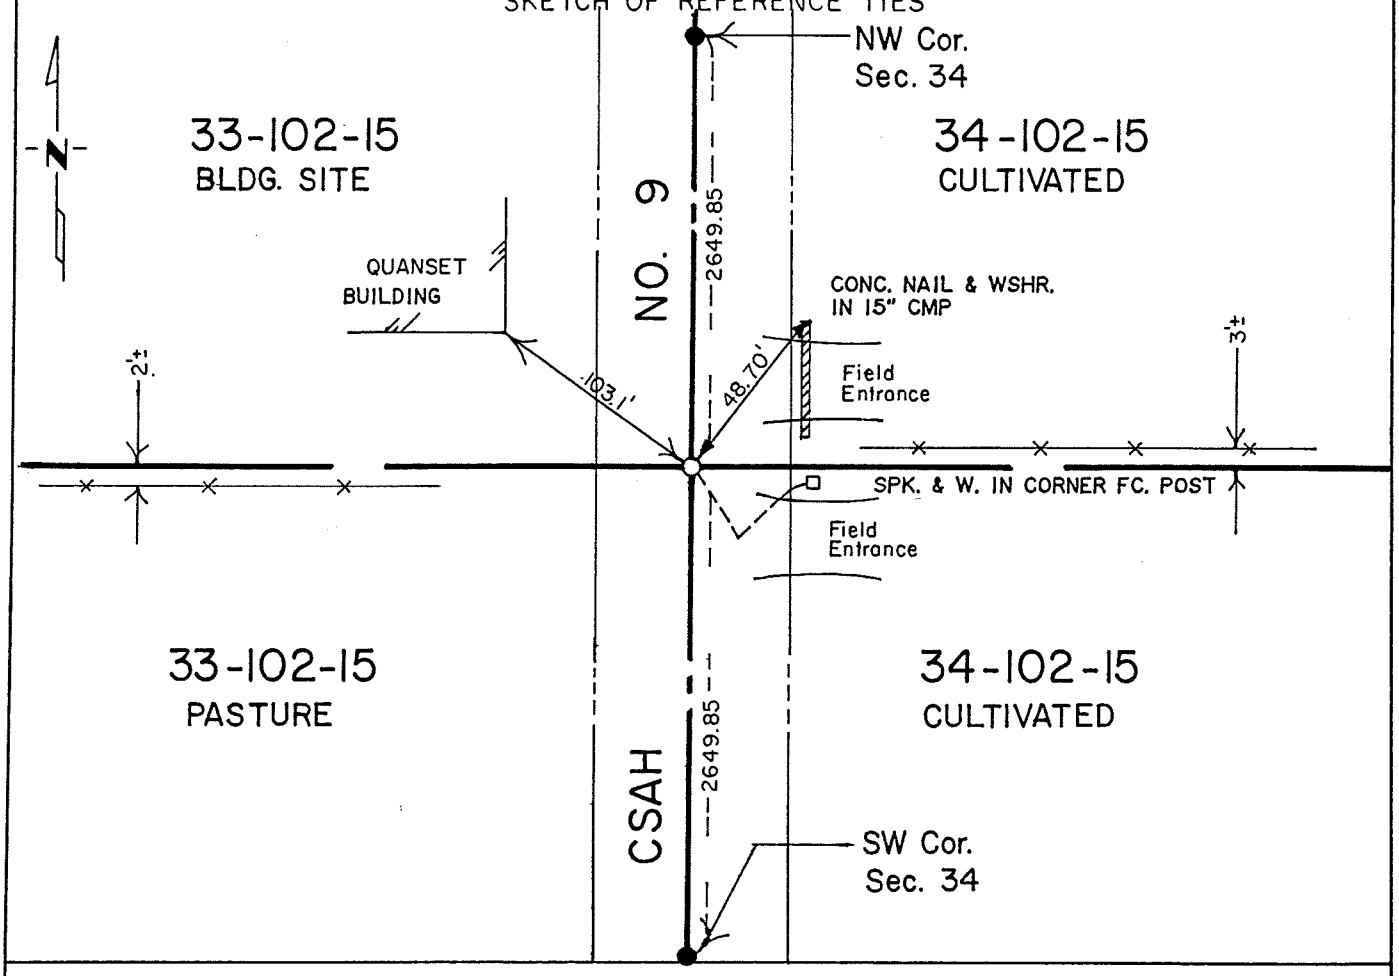

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-23-91

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

W 1/4 corner Sec 34-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Dept.
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was found to support evidence of a perpetuation of the original public land survey corner.

1991 Jones, Haugh & Smith crew, under the direction of John H. Schulte IV, dug with County backhoe dug on centerline centerline of north-south road for County State Aid Highway No. 9 grading project SAP 50-609-07. A 4'x15'x4' hole was excavated and no evidence of the original public land survey corner was found. Therefore, after taking measurements within the section, a cast iron monument was placed on the centerline N-S road at the midpoint between section corners.

The monument set fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.