Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 2, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-10-91 (DATE) found a 5/8"ø iron 0.5' below surface on C of E-W road.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-10-91 (DATE) placed a cast iron monument over iron found.

SKETCH OF REFERENCE TIES

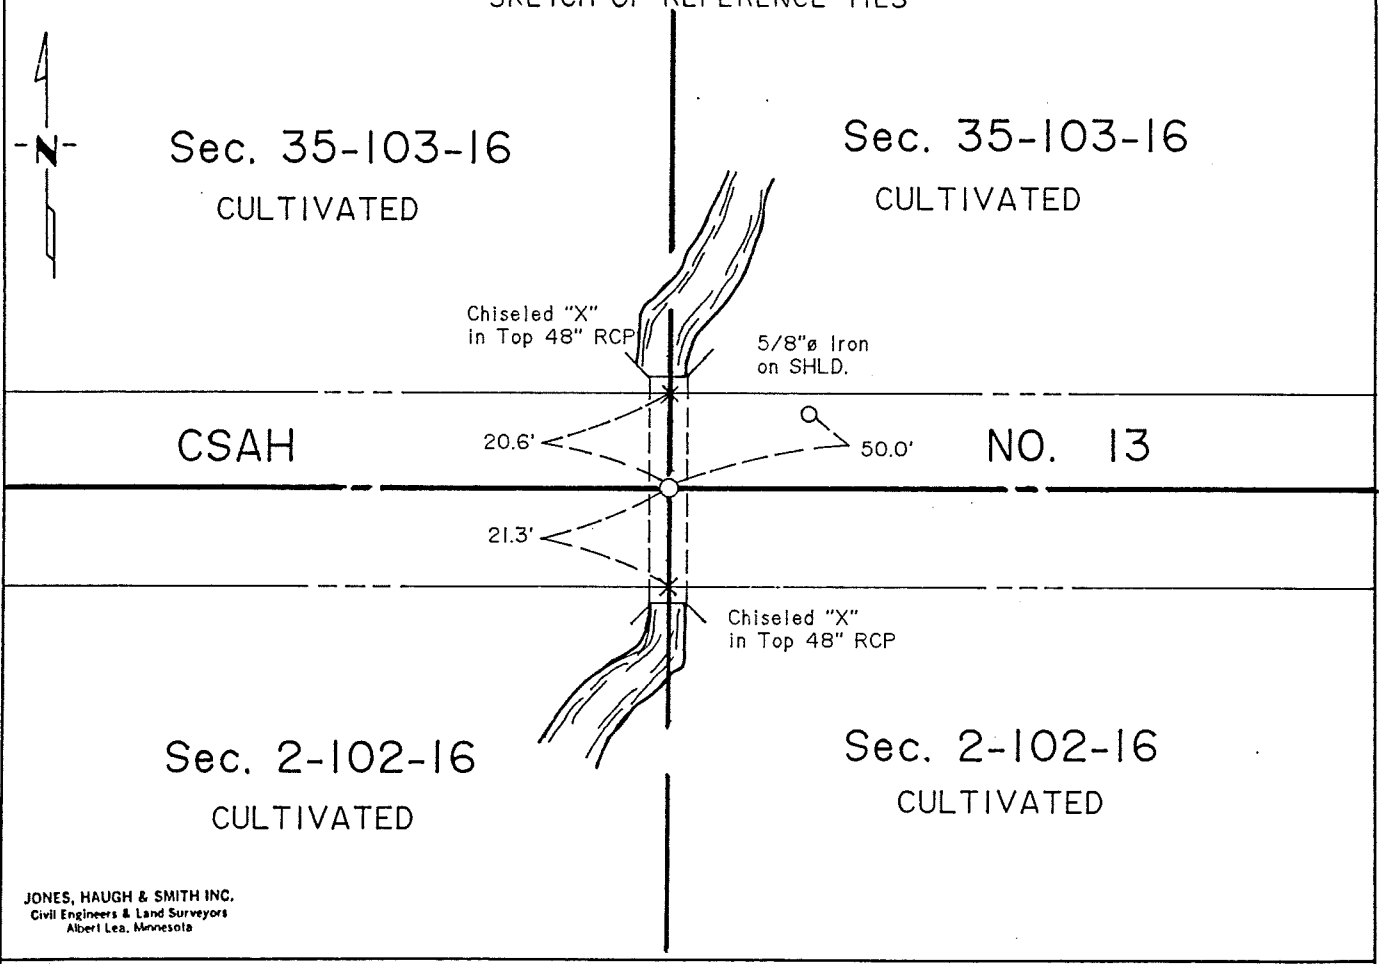

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the ____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

N 1/4 corner Section 2-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and a handful of small stones were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original PLS corner.

1980 Jones, Haugh and Smith Inc crew, during complete section survey in Section 2-102-16, discovered position of 1/4 corner to be at the location of a 48" RCP which would have destroyed any perpetuation of original public land survey corner. No notes were made of the monument placed, but the distances were recorded.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, for bituminous overlay project SAP 50-613-08, uncovered a 5/8" diameter iron 0.5' deep on centerline of E-W road over 48" RCP. Left monument as found and placed a cast iron monument over.

The monument fits and agrees with the 1980 Jones, Haugh and Smith survey records and occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.