Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 2, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-10-91 (DATE) found a 3/4"ø iron on ℄ ℄ (CO. PI) dug 8' South uncovered a 10"ø 9" concrete monument with a 3/4"ø iron cast in center on South side of old square post.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-10-91 (DATE) placed a cast iron monument over post and concrete monument found.

SKETCH OF REFERENCE TIES

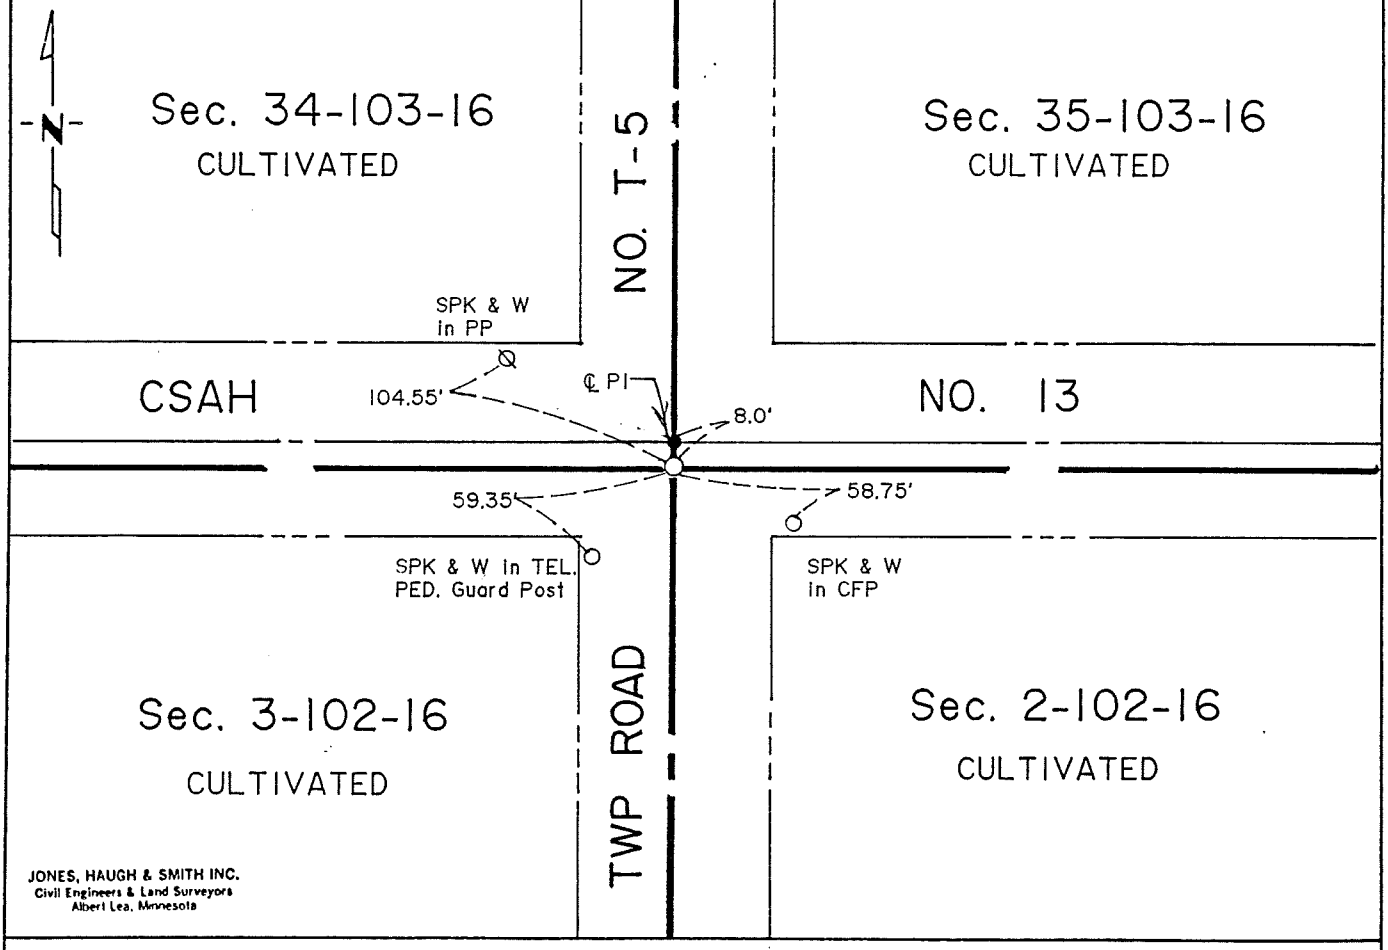

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-16-91

Registration No. 13807

☑ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 2-102-16

This corner was originally established by Deputy Surveyor John Ball of the U.S. General Land Office in 1853. The government notes show a wood post and a handful of small stones were set with a mound of earth and trench.

The following were contacted for section information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1936 County Grading Plan shows monument inplace 8.0' south of centerline PI. The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

Book "A" in the Mower County Engineering Office shows a stake inplace and the following ties were recorded:
29.6' NE to stud
39.0' SW to T.P.
34.1' NW to T.P.
8.0' S of centerline P.I

1980 Jones, Haugh & Smith Inc crew during complete section survey of Section 2 uncovered a spike, as noted and shown on Grading Plans and in Book "A" that the corner is 8' south of County P.I.

1991 Jones, Haugh & Smith Inc crew, under the direction of John H. Schulte, dug with the County backhoe for bituminous overlay project 50-613-08. Dug a 4' x 10' x 3' deep hole on N-S road and uncovered a 3/4" diameter iron 0.9' deep on centerline centerline (County P.I.). Dug at a point 8' south at location of P.K. nail flush with road surface and uncovered a 5/8" diameter iron. Continued digging and found a 10" diameter concrete monument with a 3/4" diameter iron cast in the center on the south side of the old square post. A 5/8" diameter iron found was 0.2' south and 0.6' east of concrete monument found. Left the concrete monument as found and set a CIM over the concrete monument. Reset County P.I. and placed a 5/8" diameter iron 8.0' north.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.