Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 15, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a 5/8"X4" IRON, CONCRETE MONUMENT WITH 1/2" PIN IN THE CENTER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

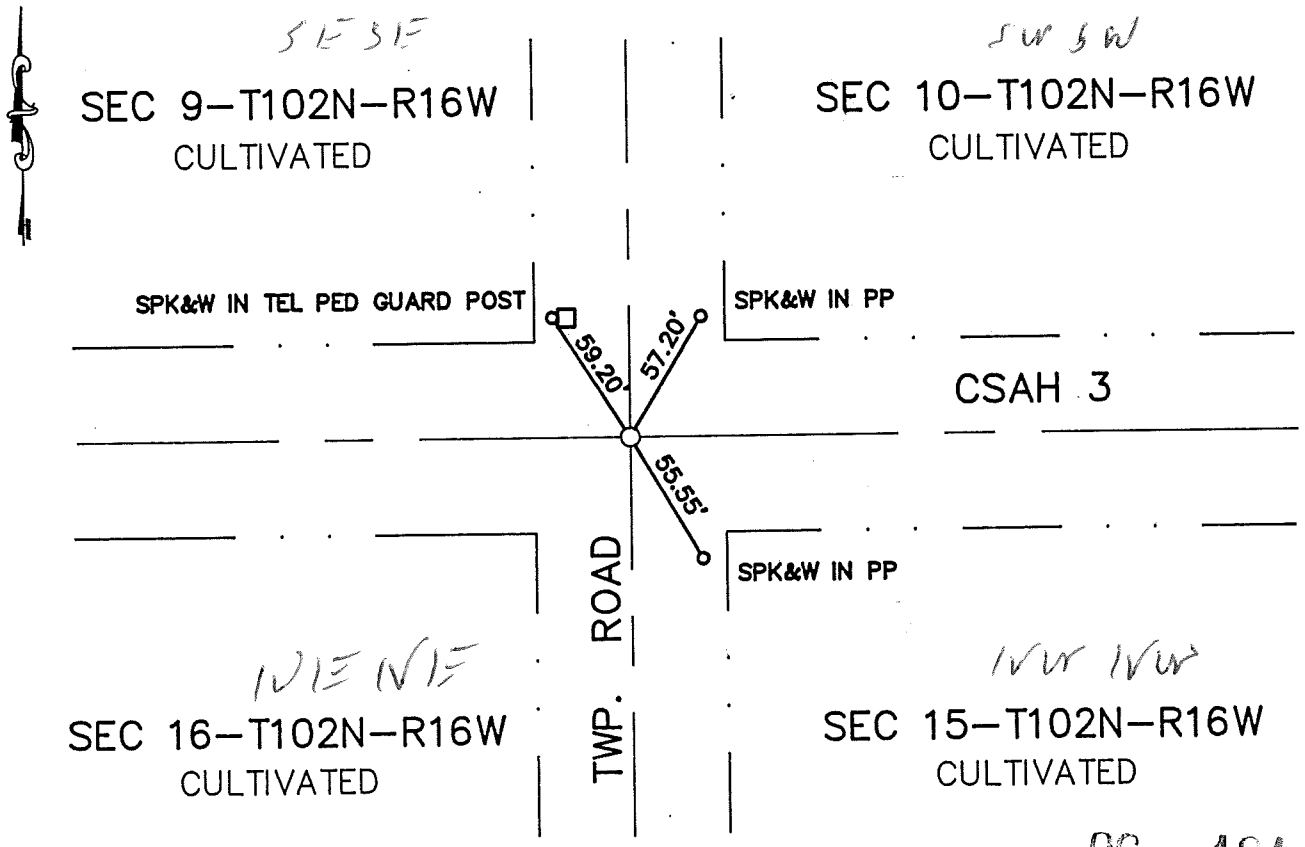

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 104

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 8-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 6 day of Aug A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 455216

M.H.D. FORM NO. 2105

Book 96 Misc Page 104

NW Cor SEC 15-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County Highway Department records show a concrete monument at this location.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at the CL of CSAH No. 3 N-S. Uncovered a 5/8"x4" iron in bituminous. Continued digging and uncovered a concrete monument with a 1/2" pin in the center. Then found a 5/8"x4" iron. Iron was 0.75" north and 0.20" east of true point. Placed a cast iron monument over monument found at road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.