p 22 "P"

Index No. P85 "N"

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E1/4 Corner of Section 17, Township 102N, Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 11-21-89 (DATE) found a 3/4"Ø PIPE 1" BELOW ROAD SURFACE.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 11-21-89 (DATE) placed a 5/8"Ø IRON CAPPED RLS 13807 AT LOCATION OF 3/4"Ø PIPE.

SKETCH OF REFERENCE TIES

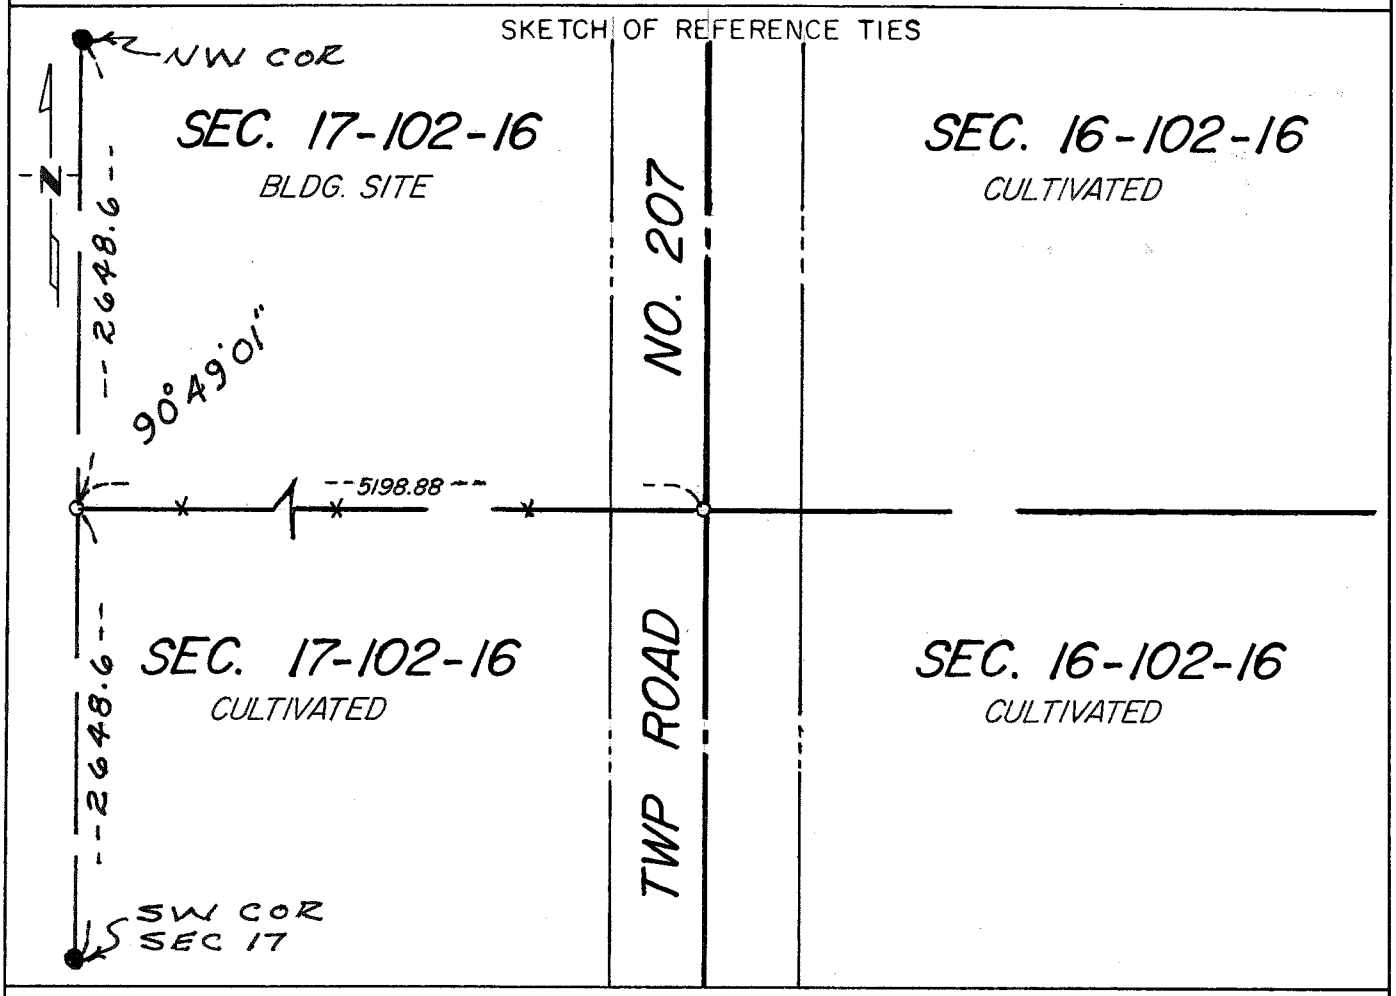

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 12-22-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19__

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

E¼ corner Section 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the United States General Land Office in 1853. The government notes show this corner was marked with a wood post in a mound of earth with a trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorders office

1989 Jones, Haugh & Smith Inc. crew dug with the county backhoe operator and uncovered a 3/4" diameter pipe 1' below road surface. Continued digging and found no further evidence of public land survey corner.

Therefore accepted 3/4" diameter pipe as a perpetuation of the public land survey corner and placed a 5/8" diameter iron at location of 3/4" pipe.

Corner found fits occupation and road centerline within the section. For electronic survey data and analysis, contact firm of Jones, Haugh & Smith.