Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 17, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/01/1995 (DATE) found a STONE AND PIECES OF WOOD STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/01/1995 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

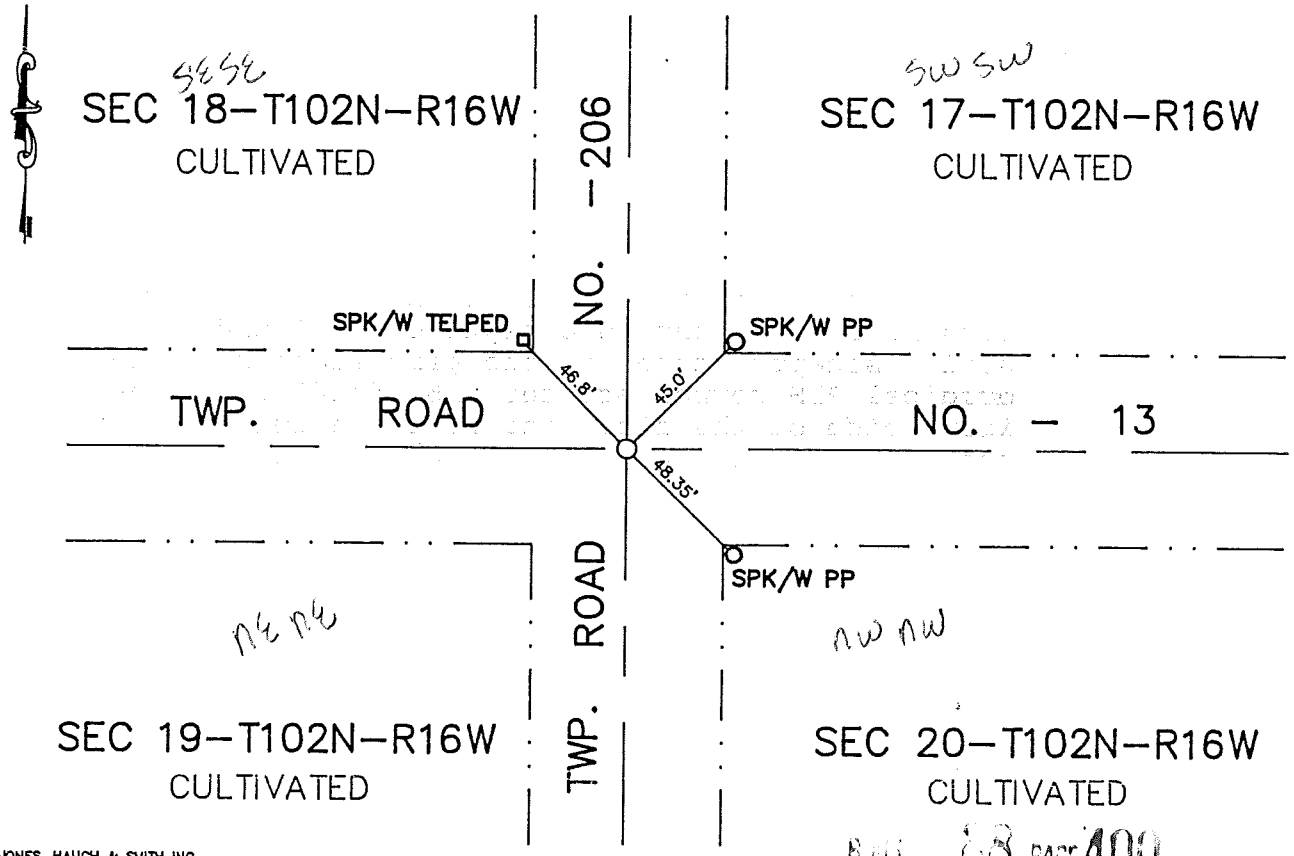

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Book 88 PAGE 400

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-25-95

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 26 day of Sept A.D., 1995

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 439611

M.H.D. FORM NO. 2105

Book 88 Misc Page 400

SW Cor SEC 17-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

1853 Mower County records state an in-placed stone 3' X 20" diameter at this location is the corner of the section. An old Oak stake was also found and placed over the stone.

1995 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL intersection N-S twp. road and E-W twp. road. A 1/2" X 24" iron was found 6" below the road surface. Continued digging and found stone and pieces of wood stake 2' deep. The stone and pieces of wood stake were accepted as the true corner, and a cast iron monument was placed over, 4" below the road surface.

The monument fit occupation and road centerlines within the section and is in agreement with the records and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

BOOK 88 PAGE 401