Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 21, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 05/14/1997 (DATE) found a STONE WITH OAK STAKE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 05/14/1997 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

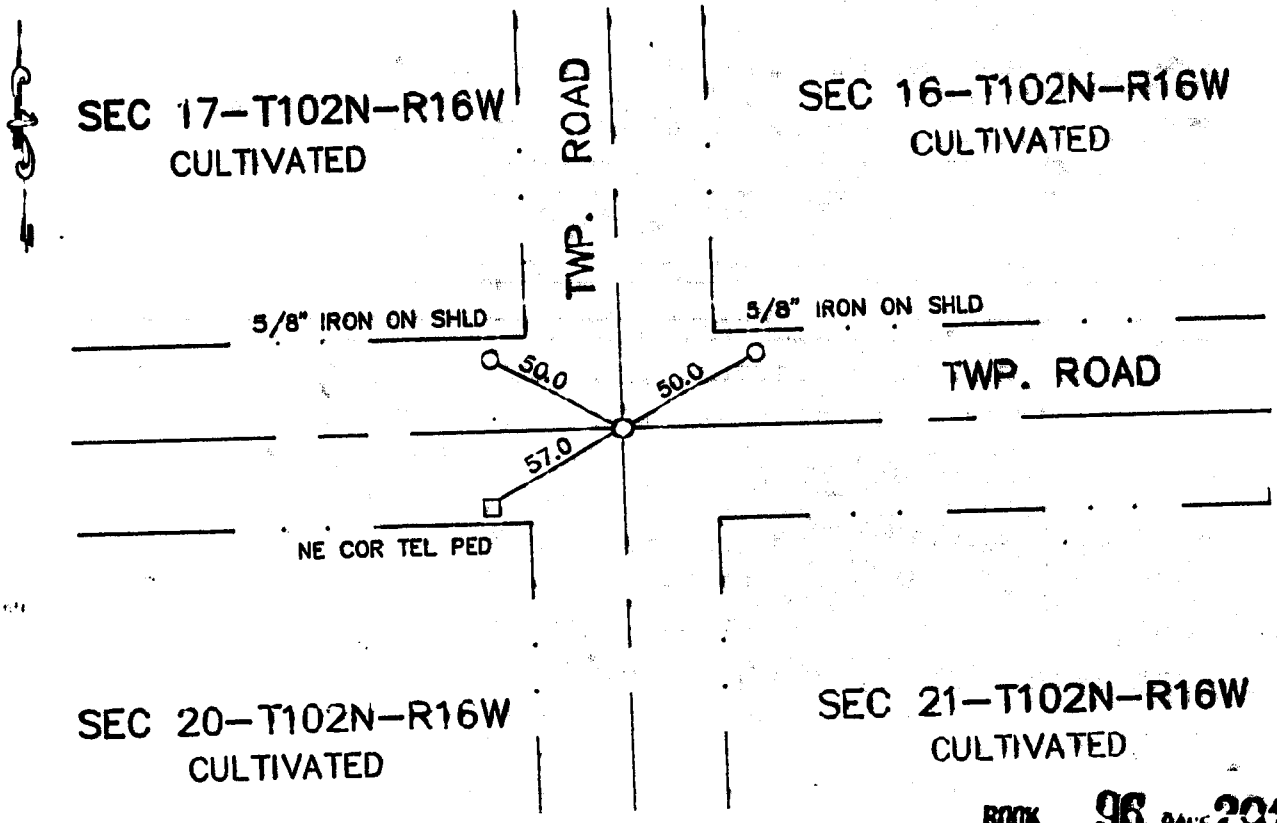

BOOK 96 PAGE 291

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P.M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Yager

By Susan M. Davis, Deputy

DOCUMENT NO. 450060

M.H.D. FORM NO. 2105

Book 96 Misc Page 291

NW Cor SEC 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with the Mower County backhoe on centerline of N-S and E-W township road Uncovered rock with an Oak hub on the south side of rock 4.0' below surface. Accepted rock as true PLS corner and set a 5/8"x16" iron capped 13807 on the north side of rock . Placed a cast iron monument 0.4' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

PAGE 30

BOOK 96 PAGE 292

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 15, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/1996 (DATE) found a CONCRETE MONUMENT

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

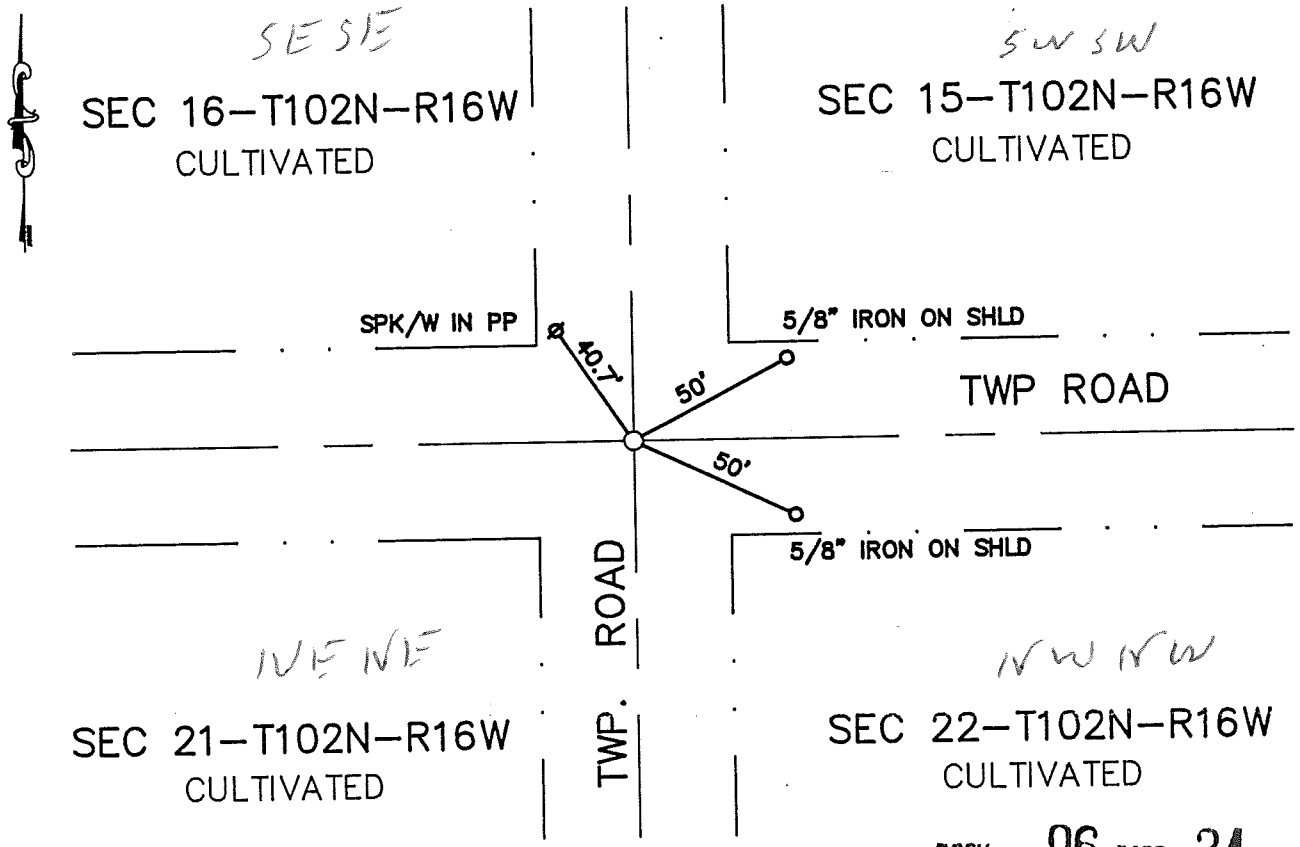

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 34

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-18-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 29 day of July A.D., 1997

COUNTY RECORDER Charles Engen

By Susan M. Davis, Deputy

DOCUMENT NO. 454990

M.H.D. FORM NO. 2105

Book 96 Misc Page 34

SW Cor SEC 15-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Tucker Land Surveying

Mower County records state inplace concrete monument.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand, uncovered concrete monument with 1/2" iron in center of monument 0.80' below road surface. Set cast iron monument over 1/2" iron 0.40' below road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.

Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SW Corner of Section 15, Township 102N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 07/12/1996 (DATE) found a CONC. MON .80 BELOW ROAD SURFACE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 07/12/1996 (DATE) placed a CAST IRON MONUMENT OVER CONC. MON

SKETCH OF REFERENCE TIES

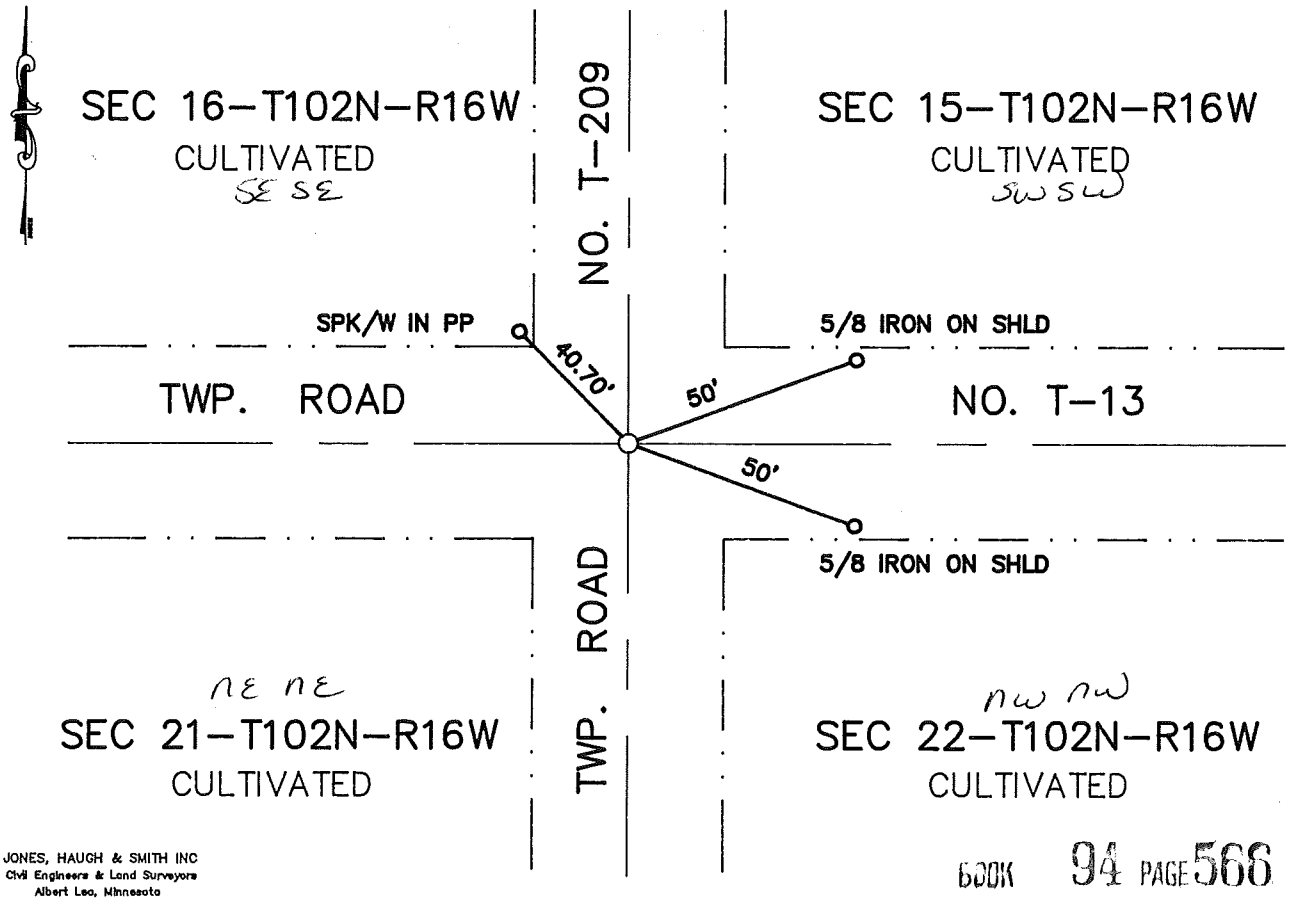

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 94 PAGE 566

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 4-4-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 3 P.M. on the 9 day of Apr A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 452258

M.H.D. FORM NO. 2105

Book 94 Misc Page 360

SW Cor SEC 15-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1996 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug by hand at the CL of township road N-S and CL of township road E-W. Uncovered a concrete monument with a 1/2" iron in the center of it. Placed a cast iron monument over 1/2" iron 0.4' below the road surface.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.