Index No. "M" p106

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 30, Township 102N, Range 15W, 5th P.M.

STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☐ On 6/30/89 (DATE) found a 1 1/2" dia iron.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6/30/89 (DATE) placed a 5/8" Ø x 16" iron capped RLS 13807.

SKETCH OF REFERENCE TIES

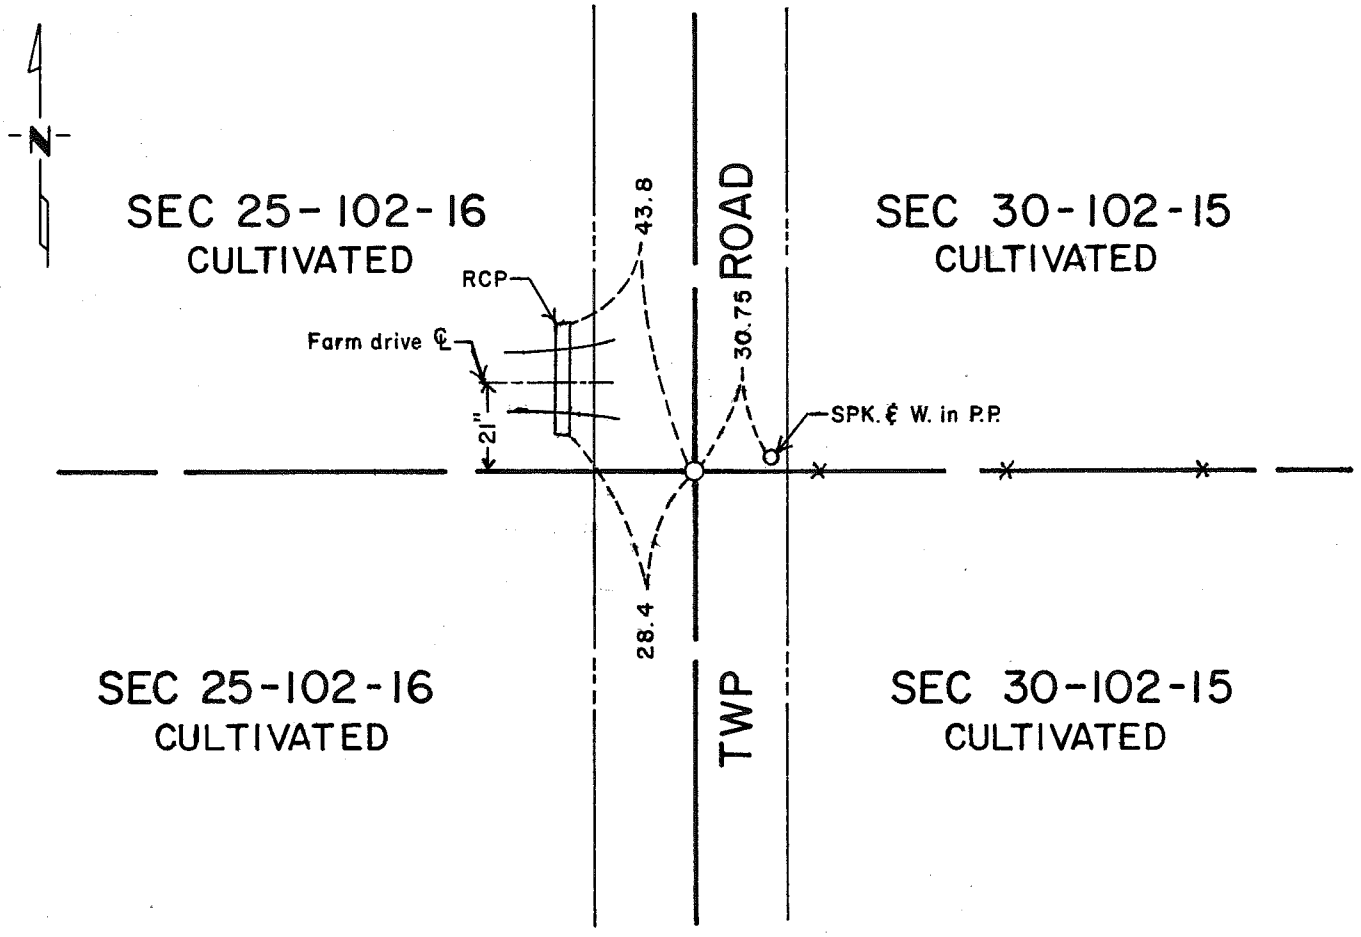

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[signature] 7-25-89
SIGNATURE DATE

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE
W 1/4 corner Sec 30-102-15

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set in a mound of earth with a trench and a hand full of small stones were deposited around post.

In 1989 Jones, Haugh & Smith Inc contacted the following for section corner information:

Mower County Engineering Department
Private records of Jones, Haugh & Smith Inc

No records of this corner were found to support evidence of a perpetuation of the original public land survey corner.

In June 1989 Jones, Haugh & Smith Inc personnel together with the Mower County backhoe, dug on the centerline of north-south roads in line with fence east and uncovered a 1 1/2" diameter iron 3.5 feet below road surface in virgin soil. Found no further evidence of public land survey corner or a perpetuation thereof. Placed a 5/8" diameter x 16" iron on road surface.

The monument found fits occupation and road centerline and is accepted as best evidence of a perpetuation of the original public land survey corner.