Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

S1/4 Corner of Section 21, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-20-93 (DATE) found a 8"x8"x18" POINTED FIELD STONE

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-20-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

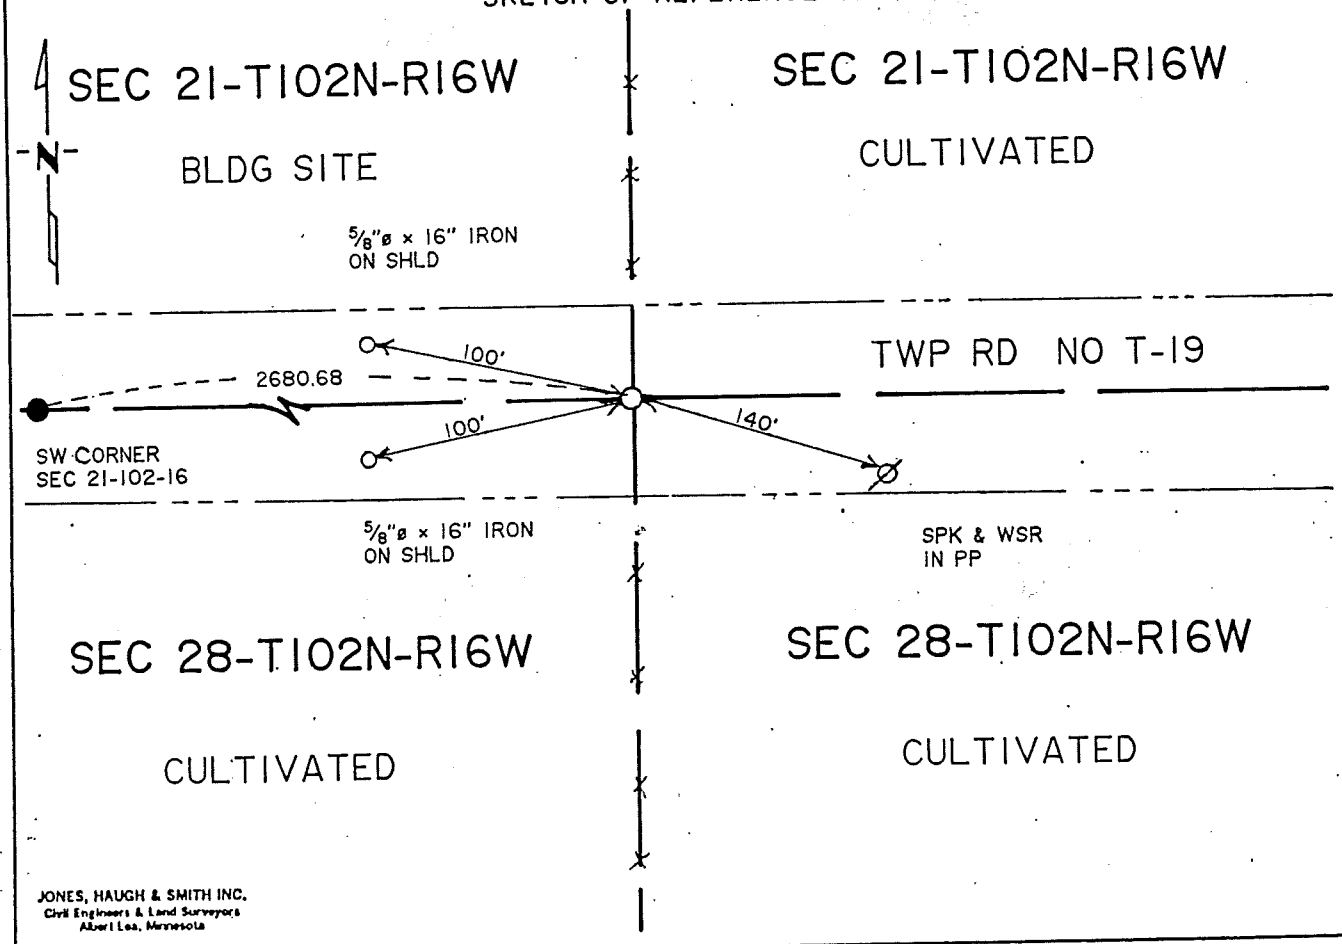

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 5-25-93

Registration No. 13607

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11:45 A.M. on the 26 day of May A.D., 1993

COUNTY RECORDER Amanda Enger

By Marlene Martin, Deputy

DOCUMENT NO. 421013

Book 79 Misc Pg 473

M.H.D. FORM NO. 2105

BOOK 79 PAGE 473

STATEMENT OF EVIDENCE

S 1/4 corner Section 21-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

The following information was obtained to support evidence of a perpetuation of the original public land survey corner.

1888 Clausen, Mower County Surveyor, found a government post at a distance of 40.54 chains from the northwest and northeast corner of Section 28-102-16.

1993 Jones, Haugh & Smith Inc crew under the direction of John H. Schulte IV, Reg. No. 13807, dug a 5'x3'x12' long hole on the centerline of the east-west township road and in line with north-south line fences. We found an 8"x8"x18" pointed field stone resting in virgin soil and on centerline of east-west roads and in line with north-south line fences. Therefore we accepted stone found as the best evidence of a perpetuation of the original public land survey corner and set a cast iron monument near road surface above stone found.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.