Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

E 1/4 Corner of Section 30, Township 102N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-94 (DATE) found a NO EVIDENCE OF PLS CORNER

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-94 (DATE) placed a CIM ON C/L; FENCE E-W; 1/16TH LINE FENCE N.

SKETCH OF REFERENCE TIES

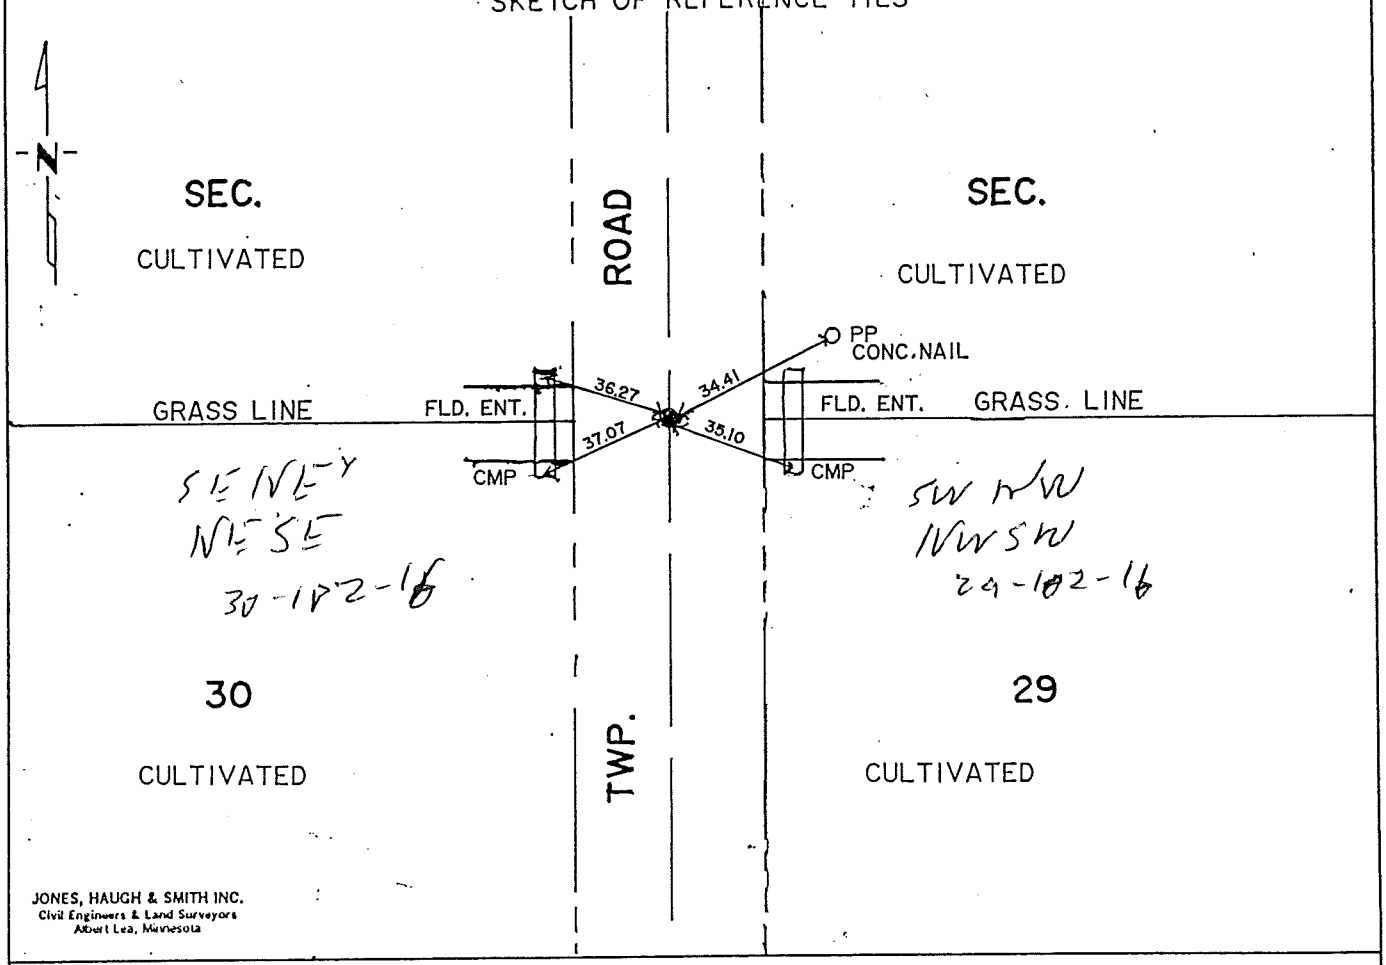

JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 7-7-94

Registration No. 13907

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 11 A .M. on the 11 day of July A.D., 1994

COUNTY RECORDER Charles Engar

By Marlene Martin, Deputy

DOCUMENT NO. 430566

Book 84 Misc Pg 1

M.H.D. FORM NO. 2105 BOOK 84 PAGE 1

STATEMENT OF EVIDENCE

E 1/4 cor 30-102-16

This corner was originally established by Deputy Surveyor John Quigley of the U.S. General Land Office in 1854. The government notes show this corner was marked with a wood post and charred stake and a trench with a mound of earth.

The following information was obtained to support evidence of the original public land survey corner or a perpetuation thereof:

1891 Clausen field notes indicate a stone at the corner.

1994 Jones, Haugh & Smith Inc personnel under the direction of John H. Schulte IV, RLS 13807, excavated with a backhoe a trench in the area of the corner. No evidence of the original public land survey corner was recovered.

The fence lines east and west and the township road centerline is accepted as the best available evidence of perpetuation of the original public land survey corner.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.